
Acknowledgement Of
Plans Submittal ONLY!
Date
Date 7/4/08

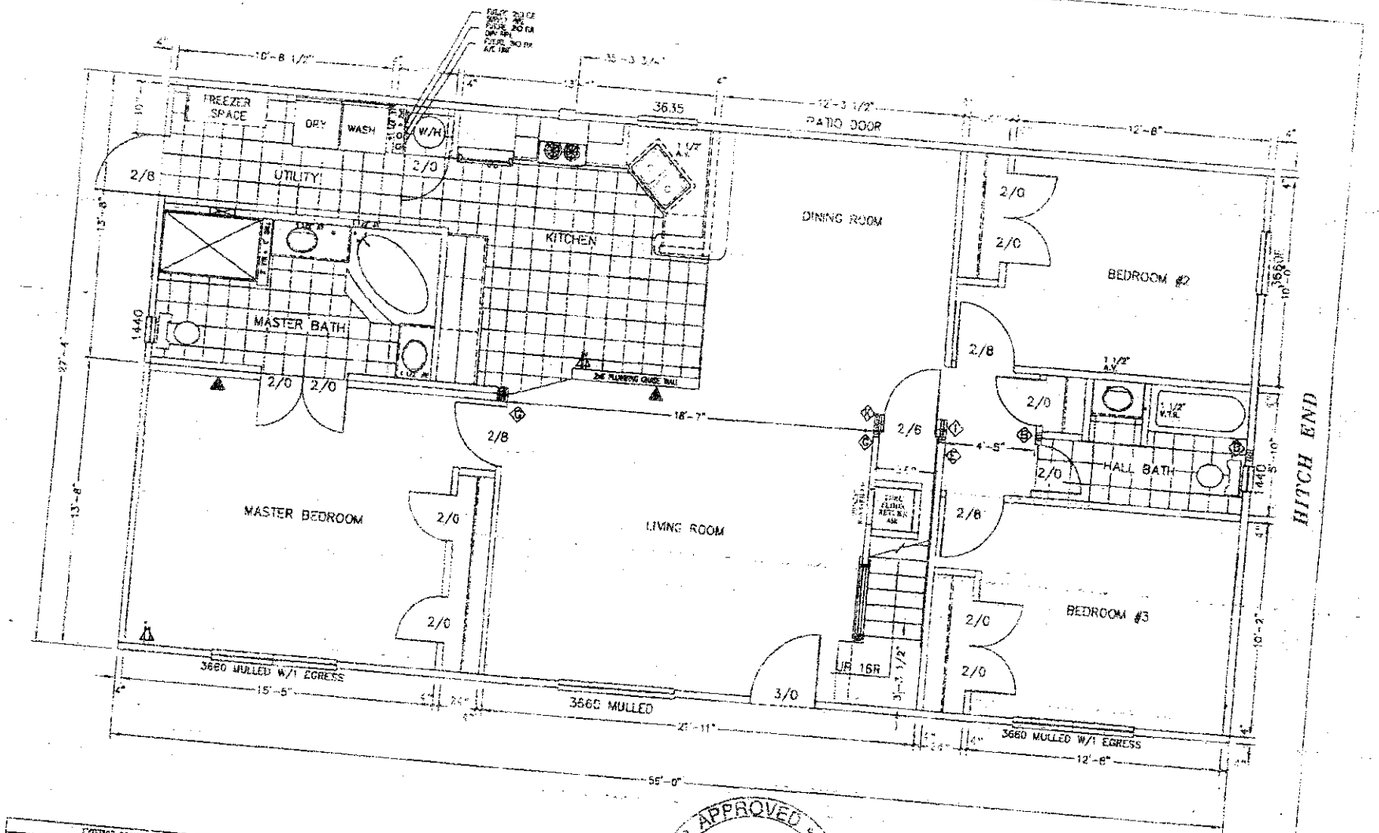


COLUMN STRAPPING SCHEDULE

- (2) 2X4 SPF #2 THIS HALF
- (3) 2X4 SPF #2 THIS HALF
- (4) 2X4 SPF #2 THIS HALF
- (5) 2X4 SPF #2 THIS HALF
- (2) 2X6 SPF #2 THIS HALF
- (3) 2X8 SPF #2 THIS HALF
- (2) 2X4 SPF #2 EACH HALF
- (3) 2X4 SPF #2 EACH HALF
- (4) 2X4 SPF #2 EACH HALF
- (5) 2X4 SPF #2 EACH HALF

*: WITH RIDGE BEAM BEARING STRAPPER

NOTES
1. ALL COLUMN STUDS SHALL BE GLUE-/ NAILED TOGETHER PVA GLUE WITH 100% COVERAGE SHALL BE USED
2. ADD ONE STEEL STRAP AT EACH STUD OF EACH COLUMN
3. CRIPPLE STUDS SHALL NOT BE NOTCHED OR BORED

EXTERIOR DOOR SCHEDULE

| DOOR | SIZE | MATERIAL | U-VALUE | SHGC |
|---|---|---|---|---|
| 1/6 | 3068 | WOOD | C.15 | N/A |
| 2/6 | 3068 | WOOD | C.15 | N/A |
| 3/6 | 5068 | WOOD | C.15 | N/A |
| PATIO/W | 5968 | VINYL LOW E | C.15 | C.30 |
| 5/6 | 3068 | VINYL LOW E | C.15 | C.30 |

INTERIOR DOOR SCHEDULE

| DOOR | SIZE | MATERIAL | U-VALUE | SHGC |
|---|---|---|---|---|
| 1/6 | 2868 | WOOD | N/A | N/A |
| 2/6 | 2468 | WOOD | N/A | N/A |
| 3/6 | 2668 | WOOD | N/A | N/A |
| 4/6 | 3068 | WOOD | N/A | N/A |
| 5/6 | 5068 | WOOD | N/A | N/A |

WINDOW SCHEDULE

| SIZE | MATERIAL | U-VALUE | SHGC |
|---|---|---|---|
| 1442 | VINYL LOW E | C.35 | C.30 |
| 2442 | VINYL LOW E | C.35 | C.30 |
| 3652 | VINYL LOW E | C.35 | C.30 |
| 3642 | VINYL LOW E | C.35 | C.30 |
| 3646 | VINYL LOW E | C.35 | C.30 |
| 3660 MULLED | VINYL LOW E | C.35 | C.30 |

SEE GP-1.0, 1.2, 1.4 IN THIS NC PKG. FOR HEADER DETAILS

APPROVED
FEB 29 2008
REVIEWED BY: S. FRANCIS
HWONC.PC

1581 SQ. FT

CLAYTON HOMES - RICHFIELD
44073 HWY 52 N. RICHFIELD, NC. 28137
THIRD PARTY: HWC & ASSOCIATES INC. 1827 SOUTH MYRTLE AVE CLEARWATER FLA. 33756

| DATE: 2-15-08 | REVISIONS | BY |
|---|---|---|
| CODES: SEE NOTES | | DRAWING |
| STATE LABEL(S): NC | | |
| SCALE: 3/16" = 1'-0" | | |

27'-4" x 56'-0" RESIDENTIAL MOD.

FLOOR PLAN

DRAWING #: Model # - 309 NC 72RNC MNJA58309:1868-5604

SHEET 5 OF 22