Acknowledgement Of
Plans Submittal ONLY!
Date 11/17/11
Date 11/17/11

WINDOW SCHEDULE


ALL WINDOWS & DOORS TO BE GENERIC WINDOWS U.N.O.

	SIZE	DESCRIPTION
1	2650	2'-6" X 5'-0" CASEMENT - TEMP. GL. - OP. PER ELEV.
2	5070 UNIT	(2) 2'-6" X 2'-0" CONTINUOUS ARCH TOP TRANSOMS
3	2040	2'-0" X 4'-0" CASEMENT - OPERATION PER ELEVATION
4	2056	2'-0" X 5'-6" ARCH TOP WINDOW - FIXED - TEMP. GLASS
5	2030	2'-0" X 3'-0" FIXED - TEMPERED GLASS
6	2656	2'-6" X 5'-6" CASEMENT - OPERATION PER ELEVATION
7	2620	2'-6" X 2'-0" FIXED TRANSOM
8	2650	2'-6" X 5'-0" CSMT. - EGRESS @ BDRM - OP. PER ELEV.
9	5010 UNIT	(2) 2'-6" X 1'-8" CONTINUOUS ARCH TOP TRANSOMS
10	2040	2'-0" X 4'-0" ARCH TOP WINDOW - FIXED
11	2660	2'-6" X 6'-0" CSMT. - EGRESS @ BDRM - OP. PER ELEV.
12	2640	2'-6" X 4'-0" CASEMENT - OPERATION PER ELEV.
13	2060	2'-0" X 6'-0" CASEMENT - OPERATION PER ELEV.
14	2460	2'-4" X 6'-0" CASEMENT - OPERATION PER ELEVATION
15	2450	2'-4" X 5'-0" CSMT. - EGRESS @ BDRM - OP. PER ELEV.
16	6030 UNIT	(2) 3'-0" X 5'-0" FIXED WINDOWS
17	6040 UNIT	(2) 3'-0" X 4'-0" CONT. ARCH TOP WINDOWS - FIXED
18	2030	2'-0" X 5'-0" CASEMENT - OPERATION PER ELEVATION

EXTERIOR DOOR SCHEDULE

ALL WINDOWS & DOORS TO BE GENERIC WINDOWS U.N.O.

	SIZE	DESCRIPTION
A	6090 UNIT	(2) 3'-0" X 9'-0" CONT. ARCH TOP S.C. ENTRY DOORS W/ ½ LITE WINDOWS - TEMP. GL.
B	3010	3'-0" X 1'-0" S.C. SERVICE DOOR
C	3080	3'-0" X 8'-0" SOLID CORE ENTRY DOOR WITH ½ LITE WINDOW - TEMP. GLASS
D	3080	3'-0" X 8'-0" SOLID CORE PATIO DOOR
E	6080	(2) 3'-0" X 8'-0" SOLID CORE PATIO DOORS
F	9080 UNIT	CONTINUOUS ARCH TOP UNIT 2'-0" X 6'-0" WINDOW, (2) 3'-0" X 8'-0" SOLID CORE PATIO DOORS, 2'-0" X 6'-0" WINDOW
G	2680	2'-6" X 8'-0" SOLID CORE PATIO DOOR
H	3080	3'-0" X 8'-0" SCREEN DOOR
J	6010 UNIT	(2) 3'-0" X 1'-0" SOLID CORE SERVICE DOORS
K	3070	3'-0" X 7'-0" SOLID CORE PATIO DOOR
L	6070 UNIT	(2) 3'-0" X 7'-0" SOLID CORE PATIO DOORS
M	2670	2'-6" X 7'-0" SOLID CORE PATIO DOOR

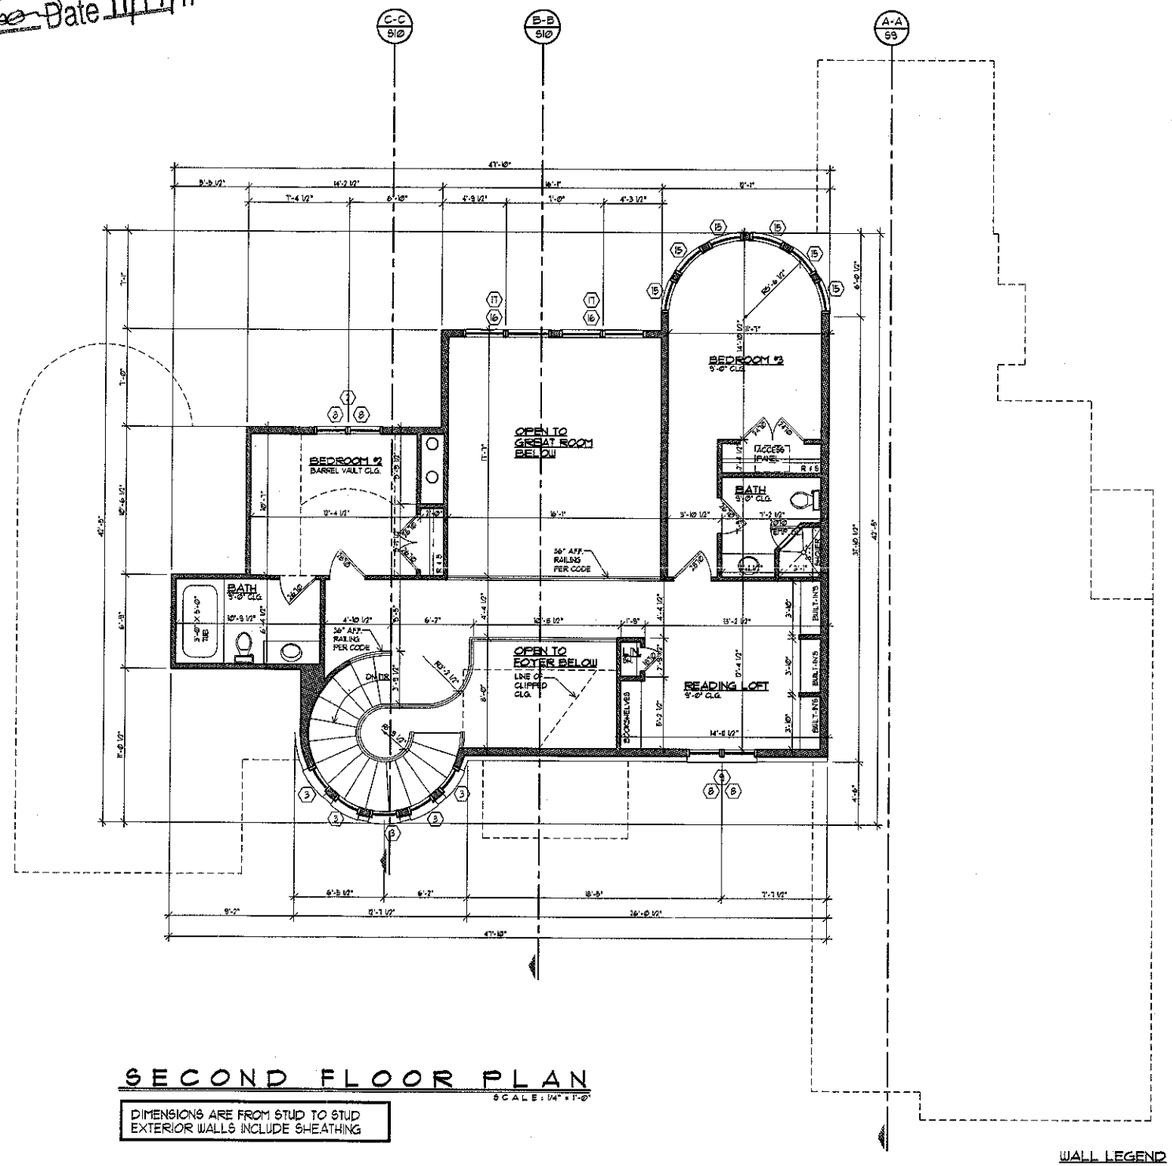

SECOND FLOOR PLAN

SCALE: 1/4" = 1'-0"

DIMENSIONS ARE FROM STUD TO STUD
EXTERIOR WALLS INCLUDE SHEATHING

WALL LEGEND

- 3 1/2" — INTERIOR WALLS: 2X4 STUDS @ 16" O.C.
- 6" — EXTERIOR WALLS: 2X6 STUDS @ 16" O.C., INSULATION, 7/16" OSB SHEATHING, HOUSE WRAP, STUCCO
- 10 1/2" — 2X6 STUDS @ 16" O.C., INSULATION, 7/16" OSB SHEATHING, HOUSE WRAP, 1" AIRSPACE, STONE VENEER

VanBrouck & Associates, Inc.
Residential Design Group
5517 Arbor Bay Dr.
Brighton, MI 48116
van brouck AND ASSOCIATES
Ph: (734) 604-2400
Fax: (810) 844-0695

ENGINEERED BY:
Queen Structural Engineering
NC PE Lic 19615 NC Firm Lic #4798 SC PE Lic 25294
Robert P. Queen, PE
2632 Pamlico Drive, Shelby, NC 28152
(704) 477-0985

FOLEY RESIDENCE
LAKE NORMAN, NC

JOB #11-111-C
6-7-11
6-28-11
7-14-11
7-21-11
9-8-11

BL.OUT: C.T.
W/D: C.T.
CHK'D BY: J.V.

SHEET # A4
OF 20 SHEETS

COPYRIGHT © 2011
VANBROUCK & ASSOC., INC.

van brouck AND ASSOCIATES