
THE POINT

PRELIMINARY PLAT NOT FOR CONSTRUCTION
RECORDATION,SALES OR CONVEYANCES

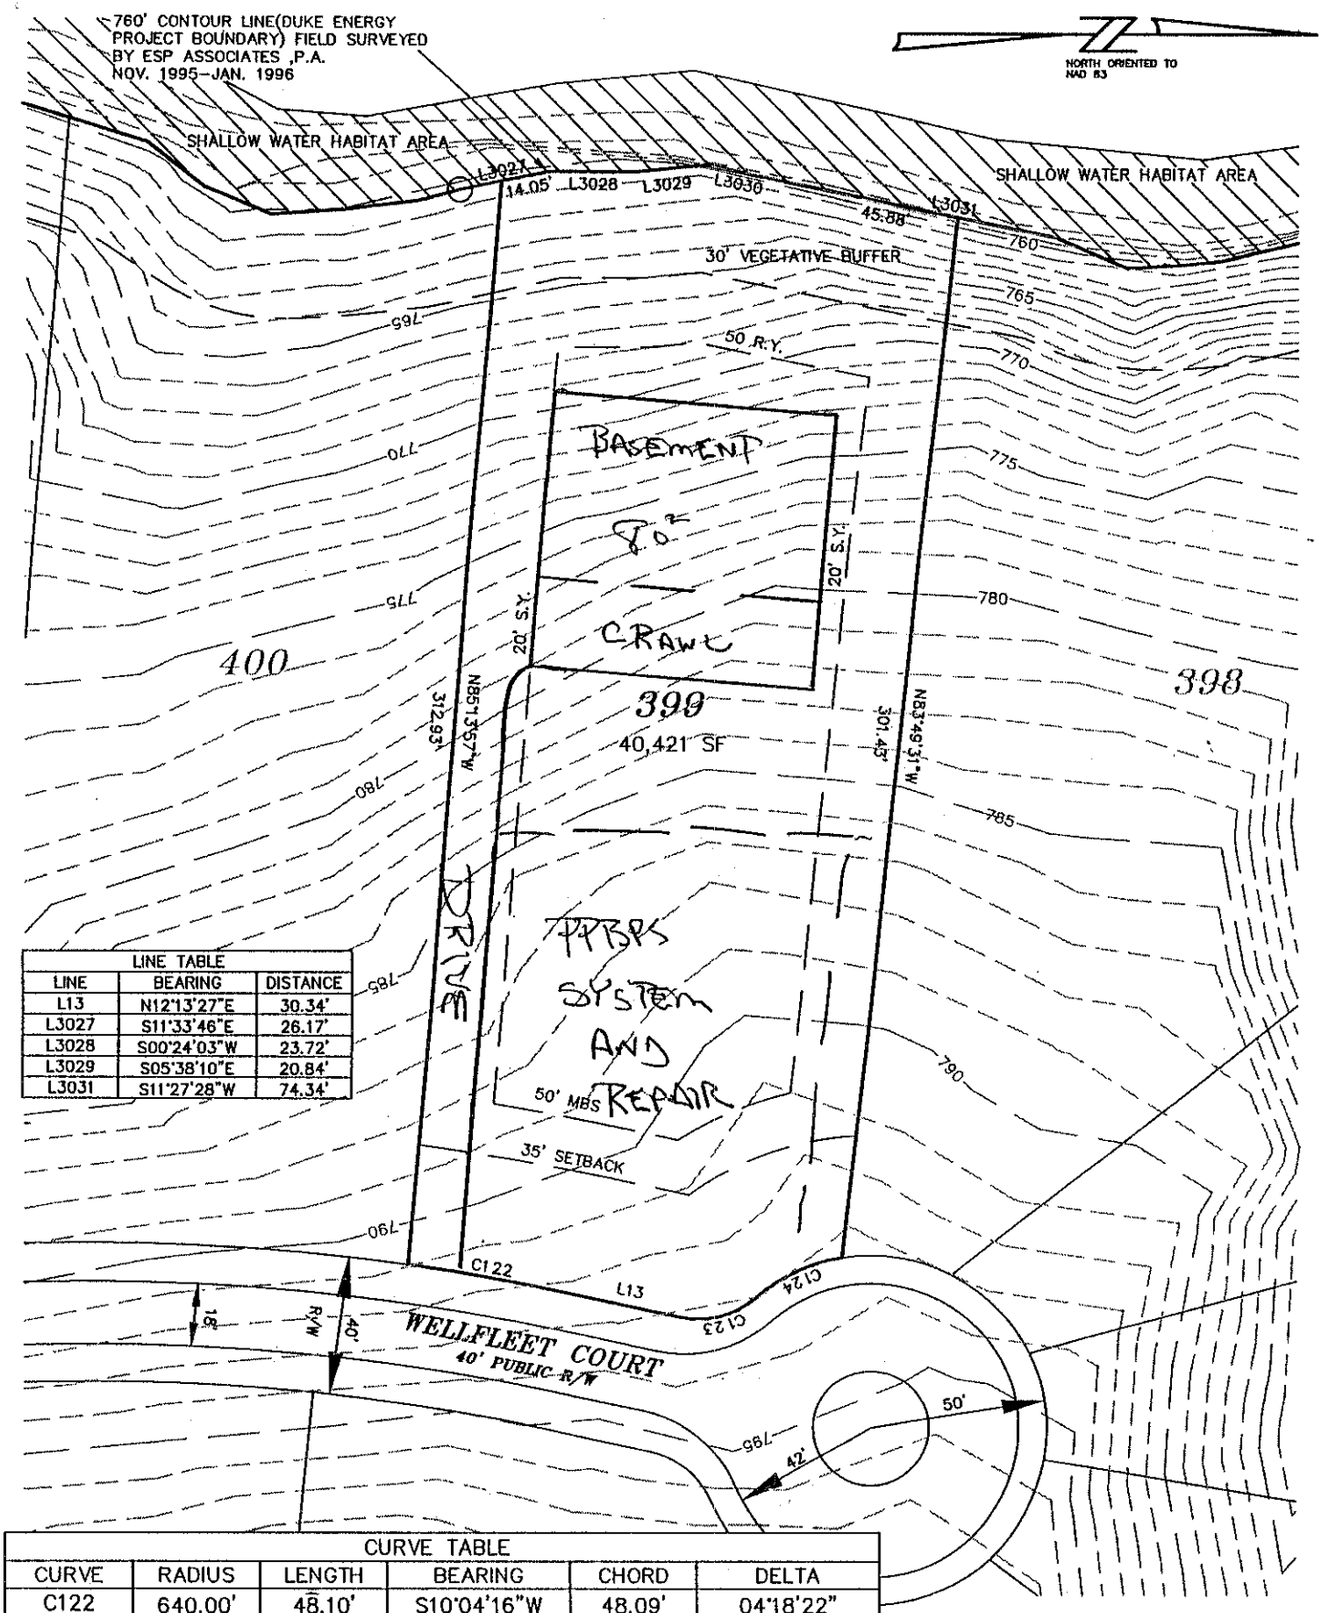

LINE TABLE		
LINE	BEARING	DISTANCE
L13	N12°13'27"E	30.34'
L3027	S11°33'46"E	26.17'
L3028	S00°24'03"W	23.72'
L3029	S05°38'10"E	20.84'
L3031	S11°27'28"W	74.34'

CURVE TABLE					
CURVE	RADIUS	LENGTH	BEARING	CHORD	DELTA
C122	640.00'	48.10'	S10°04'16"W	48.09'	04°18'22"
C123	25.00'	23.18'	N14°20'27"W	22.36'	53°07'48"
C124	50.00'	27.47'	S25°09'53"E	27.13'	31°28'56"

STREET TREES TO BE PLANTED OUTSIDE OF R/W

LEGEND
R/W=RIGHT-OF-WAY
SSRW = SEWER R/W
MBS = MINIMUM BUILDING SETBACK
S.Y. = SIDE YARD
R.Y. = REAR YARD
PDE = PUBLIC DRAINAGE EASEMENT
FPE = FLOOD PROTECTION ELEVATION

"Prior to constructing any pier,structure or other improvement within any pier zone shown on this plat, a permit must be obtained by the applicable lot owner from Duke Energy Corporation in accordance with the terms of the applicable Lot Purchase and Sale agreement and the Declaration of Covenants,Conditions and Restrictions for The Point."

Piers may extend from the shore for a distance of 80 feet regardless of the water depth and may extend to a maximum length of 120 feet to achieve a water depth of 10 feet, measured at full pond. In no event may a pier extend more than 1/3 of the width of the cove in which it is located. The top decking of all piers must be at least 1 foot above the water surface at full pond.

PHASE 4 LOT #399

WELLFLEET COURT

ACRE 40,421 (SF)

DESCRIPTION

1"=50'

12/02/99

NRMPH4LOT399.DWG

BAR SCALE 1"=50'

0 25 50 100

ESP ASSOCIATES, P.A.
engineering•surveying•planning
10915 Southern Loop Boulevard
Pineville, N.C. (704) 583-4949