
REVIEW LAYOUT DRAWING AND READ INSTALLATION GUIDE BEFORE BEGINNING INSTALLATION.
IF YOU DID NOT RECEIVE AN INSTALLATION GUIDE, REQUEST ONE FROM YOU CONTRACTOR YARD SALES REPRESENTATIVE.

SOLID BLOCK ALL POINT LOADS PER DETAIL. SEE INSTALLATION GUIDE.

SEE INSTALLATION GUIDE FOR DOUBLE JOIST FILLER AND CONNECTION REQUIREMENTS.

SEE INSTALLATION GUIDE FOR LVL CONNECTION REQUIREMENTS.

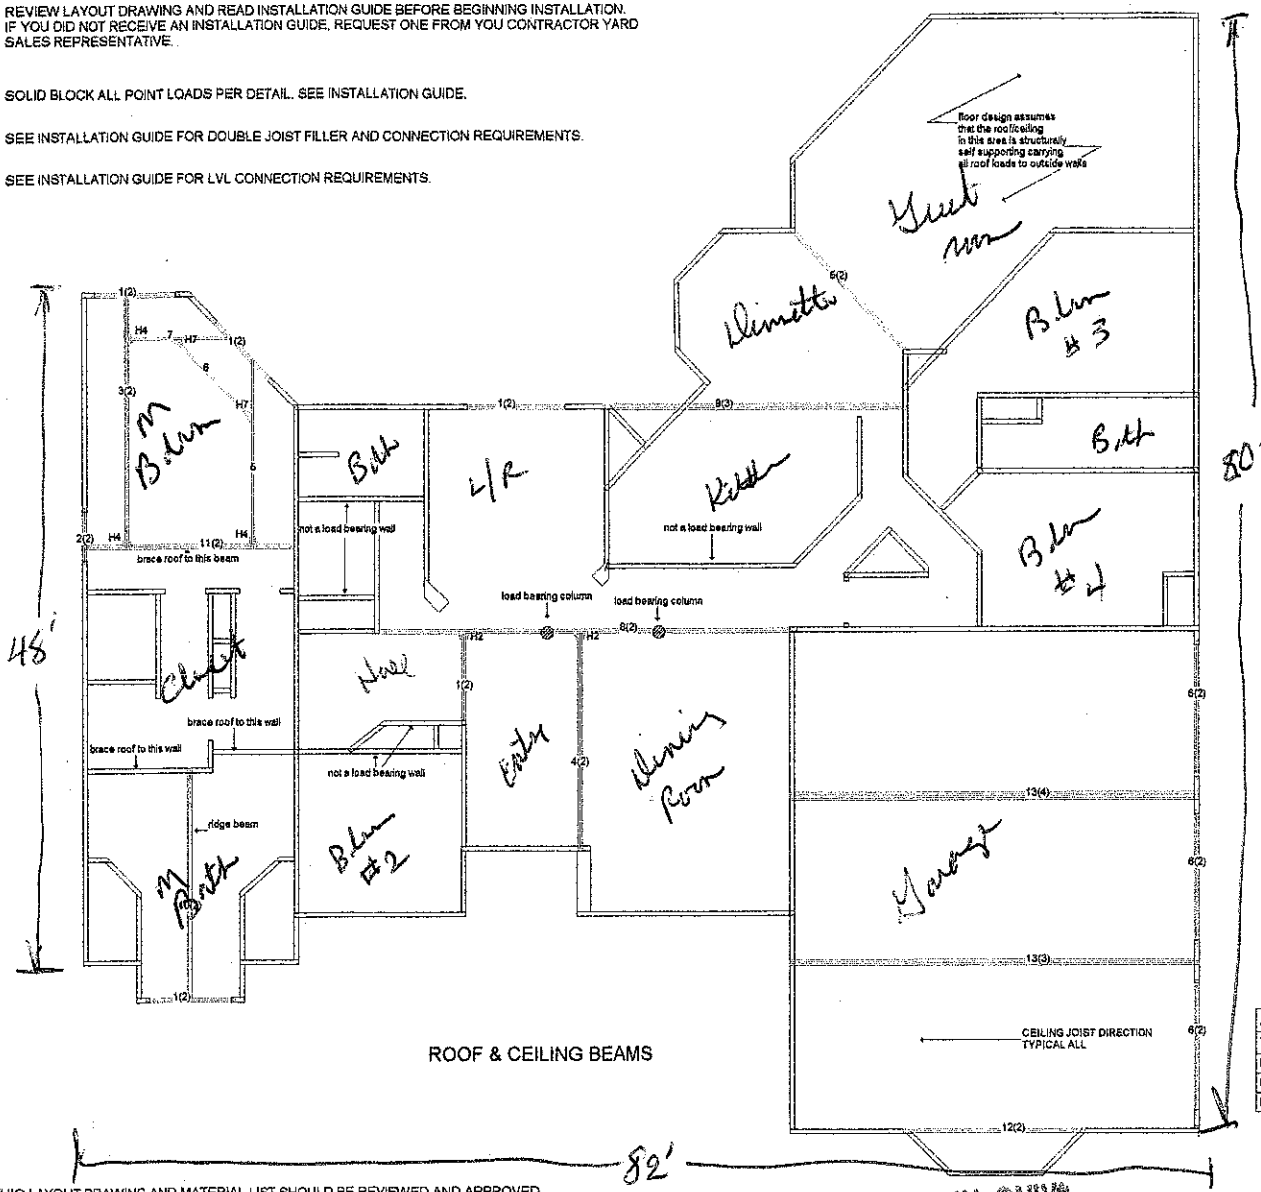

ROOF & CEILING BEAMS

Framing Schedule - Nominalized			
Tag	Qty	Description	Length
1	10	1-3/4" x 9-1/4" VERSA-LAM® 2.0 3100 SP	8' 0"
2	2	1-3/4" x 9-1/4" VERSA-LAM® 2.0 3100 SP	6' 0"
3	2	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	20' 0"
4	2	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	16' 0"
5	3	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	14' 0"
6	7	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	10' 0"
7	1	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	6' 0"
8	2	1-3/4" x 14" VERSA-LAM® 2.0 3100 SP	32' 0"
8	3	1-3/4" x 14" VERSA-LAM® 2.0 3100 SP	24' 0"
10	2	1-3/4" x 14" VERSA-LAM® 2.0 3100 SP	18' 0"
11	2	1-3/4" x 18" VERSA-LAM® 2.0 3100 SP	16' 0"
12	2	1-3/4" x 18" VERSA-LAM® 2.0 3100 SP	14' 0"
13	7	1-3/4" x 24" VERSA-LAM® 2.0 3100 SP	32' 0"

Accessory Schedule				
Tag	Qty	Manufacturer	Product	Description
H2	2	Simpson Strong-Tie Inc.	HRUS410	3-1/2 x 9-1/4 to 11-7/8 Face Mount
H4	3	Simpson Strong-Tie Inc.	HUS1.81/10	1-3/4 x 9-1/2 to 20 Face Mount
H7	2	Simpson Strong-Tie Inc.	SIMPSON L90Z	field skewable framing angle

Acknowledgement of Plans Submitted ONLY
Date: 5-17-07
Date: 5-17-07

REVISIONS:	BY:

NOTE: ALL MEASUREMENTS TO BE VERIFIED IN THE FIELD.

The Contractor Yard

PRELIMINARY DRAWING NOT FOR CONSTRUCTION.

HENDRIX CONSTRUCTION
VAN TASSEL RESIDENCE
ROOF AND CEILING BEAMS
THE CONTRACTOR YARD
CHARLOTTE, NC

BC FRAMER® 8	
SCALE: 1/4" = 1'-0"	
DATE: 3/24/2006	
BY: G.DAVIS	
FILE: 060313.bcf	
DWG:	
SHEET: 2 / 2	

THIS LAYOUT DRAWING AND MATERIAL LIST SHOULD BE REVIEWED AND APPROVED BY THE CONTRACTOR AND THE ENGINEER OF RECORD BEFORE BEGINNING CONSTRUCTION.

FOR APPROVAL ONLY
NOT FOR CONSTRUCTION

AS DRAWN _____
AS NOTED _____
REUBMIT _____