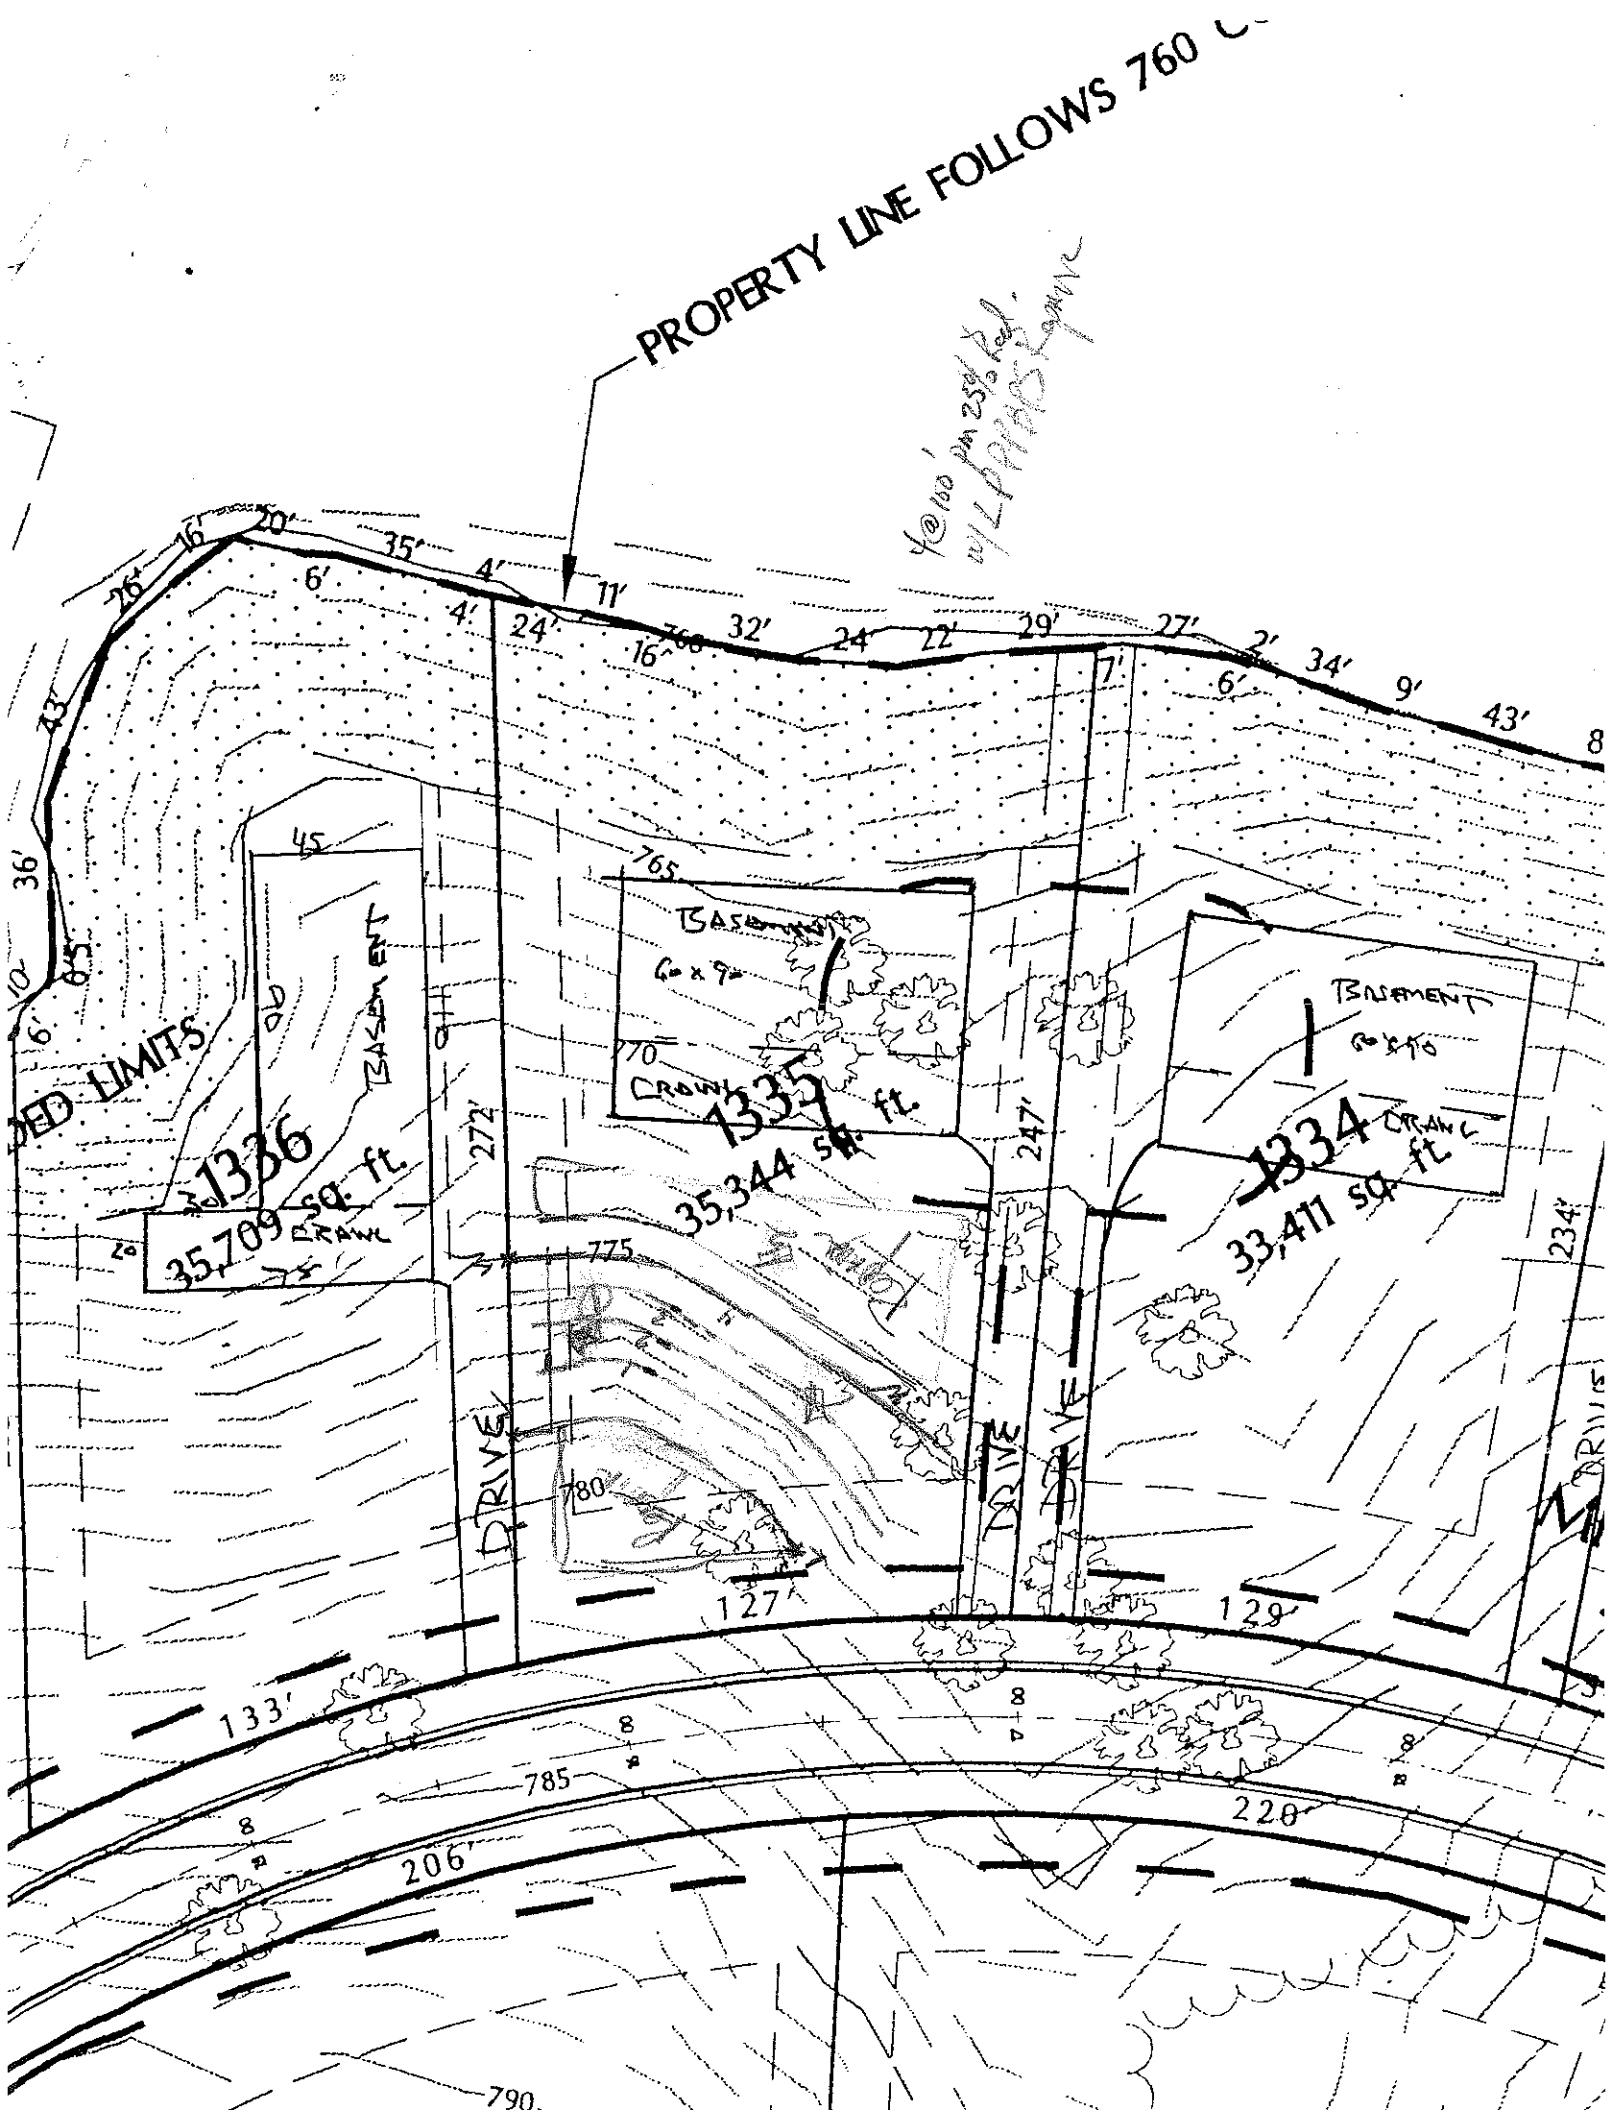

PROPERTY LINE FOLLOWS 760 C
Y@150' from 25½' Rad.
W/L Prints Survey
DED LIMITS
1336
35,709 sq. ft.
CRAWL
BASEMENT
1335
35,344 sq. ft.
CRAWL
BASEMENT
6 x 9
1334
33,411 sq. ft.
CRAWL
BASEMENT
DRIVE
DRIVE
DRIVE
45
765
770
775
780
785
790
272'
247'
234'
127'
129'
133'
206'
220'
43'
36'
26'
16'
20'
35'
6'
4'
11'
24'
32'
22'
29'
27'
2'
34'
9'
43'
7'

DIVISION OF ENVIRONMENTAL HEALTH
ON-SITE WASTEWATER SECTION

Sheet ___ of ___
PROPERTY ID #: _____
COUNTY: _____

SOIL/SITE EVALUATION
for ON-SITE WASTEWATER SYSTEM

OWNER: _____ APPLICATION DATE _____
ADDRESS: _____
PROPOSED FACILITY: _____ PROPOSED DESIGN FLOW (.1949): 480 gpd DATE EVALUATED: 3-5-04
LOCATION OF SITE: Lot 1335 Ohs 13 The Pt PROPERTY SIZE: _____
WATER SUPPLY: ☐ Private ☒ Public ☒ Well ☐ Spring ☐ Other _____ PROPERTY RECORDED: _____
EVALUATION METHOD: ☐ Auger Boring ☒ Pit ☐ Cut
TYPE OF WASTEWATER: ☒ Sewage ☐ Industrial Process ☐ Mixed

PROFILE #	.1940 LANDSCAPE POSITION/ SLOPE %	HORIZON DEPTH (IN.)	SOIL MORPHOLOGY (.1941) .1941 STRUCTURE/ TEXTURE	.1941 CONSISTENCE/ MINERALOGY	OTHER PROFILE FACTORS .1942 SOIL WETNESS/ COLOR	.1943 SOIL DEPTH	.1956 SAPRO CLASS	.1944 RESTR HORIZ	PROFILE CLASS & LTAR
1		0-4	gr Lbr cl	fr SSSP					.3+
		4-34	wk fsbk R light/heavy C	fr SSSP					
		34-50	wk fsbk yr cl	fr SSSP common mic sap					
2		0-6	wk sbk brn sl	fr SSSP					.3+
		6-21	wk fsbk RC	fr SPSSP					
		21-30	wk fsbk L	fr SSSP few mic sap					
		30-56	mas mic SL sap	fr SSSP					
3	7%+	0-5	gr brn sl	fr SSSP					.3
		5-33	wk fsbk RC	fr SSSP					
		33-53	wk fsbk yr cl	fr SSSP common fine mic sap					
4									

DESCRIPTION	INITIAL SYSTEM	REPAIR SYSTEM
Available Space (.1945)	15	15
System Type(s)	Conventional	LPP/RBK
Site LTAR	.3	.3

OTHER FACTORS (.1946): _____
SITE CLASSIFICATION (.1948): S _____
EVALUATED BY: _____
OTHER(S) PRESENT: Paul Kennington

COMMENTS: _____