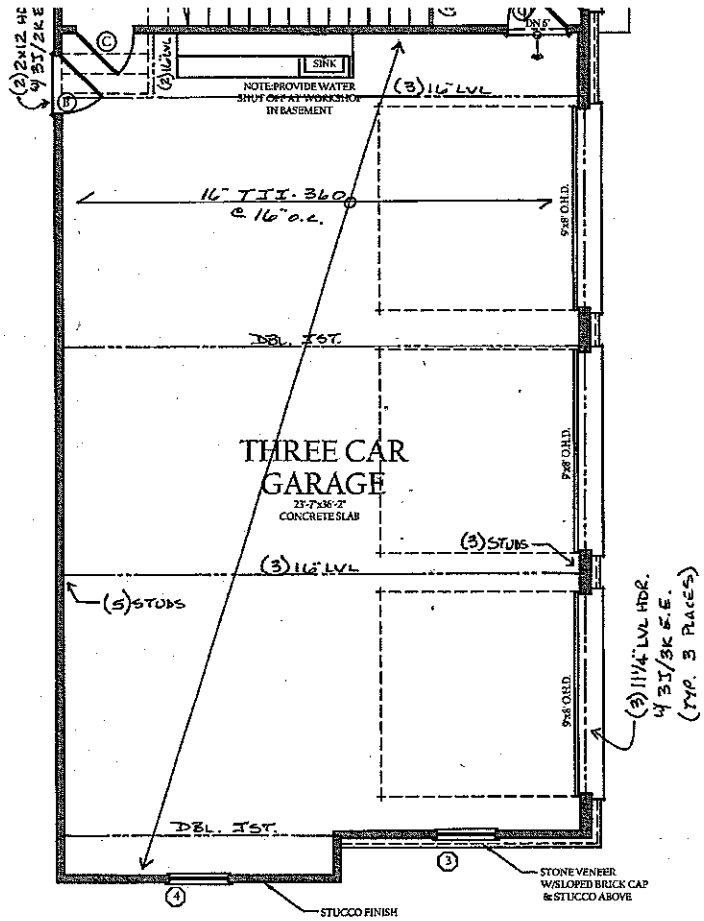


BARREL VAULT CEILING AND ARCH MASONRY OPENING TO MATCH ARCH @ FRONT DOOR TRANSOM

4 2J/2K E.E. (TYP. 3 PLACES)
POST W/ LIGHT & STONE WING WALL W/ SLOPED STONE CAP

NOTES:

1. ALL FLOOR JOISTS SHALL BE TJI-230 SERIES 14" DEEP @ 16" o.c. U.N.O.
2. ALL STRUCTURAL HEADERS THIS LEVEL SHALL BE (2) 2x10's U.N.O.
3. PROVIDE DOUBLE JOIST UNDER ALL PARRALLEL WALLS.

DOOR SCHEDULE

A	3'0"x8'0"	3/4 LITE EXTERIOR DOOR W/ SIDELIGHTS AND ARCHED TRANSOM
B	2'8"x8'0"	1/2 GLASS DOOR
C	2'8"x8'0"	20 MIN. FIRE RATED DOOR
D	12'0"x8'0"	SLIDING GLASS DOOR
E	2'8"x8'0"	FULL GLASS EXT. DOOR, OUTSWING
F	2'6"x8'0"	SOLID CORE DOOR
G	2'4"x8'0"	SOLID CORE DOOR
H	2'8"x8'0"	SOLID CORE DOOR
J	2-2'0"x8'0"	SOLID CORE DOOR
K	2'0"x8'0"	SOLID CORE DOOR
L	2'0"x	GLASS SHOWER DOOR
M	3'6"x8'0"	CASED OPENING
N	15'0"x8'0"	CASED OPENING
P	10'6"x8'0"	CASED OPENING
Q	2-2'0"x7'0"	SOLID CORE DOOR
R	2'4"x7'0"	SOLID CORE DOOR
S	2'8"x7'0"	SOLID CORE DOOR
T	2'6"x7'0"	SOLID CORE POCKET DOOR
U	2'6"x7'0"	SOLID CORE DOOR
V	2'8"x7'0"	3/4 GLASS EXTERIOR DOOR
W	2'8"x7'0"	FULL GLASS DOOR
X	3'0"x7'0"	SOLID CORE DOOR, W/3 POINT LOCK
Y	2-3'0"x6'8"	20 MIN. FIRE RATED DOORS
Z	12'0"x7'0"	SLIDING GLASS DOOR
AA	3'0"x7'0"	CASED OPENING
BB	8'0"x7'0"	CASED OPENING

WINDOW SCHEDULE

1	2'4"x4'6"	CASEMENT
2	2'8"x4'6"	CASEMENT
3	2'8"x6'0"	CASEMENT W/ 36" TRANSOM
4	2'8"x6'0"	CASEMENT W/ 18" TRANSOM
5	2'8"x4'6"	CASEMENT W/ 18" TRANSOM
6	2-2'8"x1'6"	FIXED TRANSOM
7	2'8"x1'6"	FIXED TRANSOM
8	3-2'8"x5'0"	CASEMENT
9	3-2'4"x4'6"	CASEMENT
10	2'0"x6'0"	CASEMENT W/ 18" TRANSOM
11	2'8"x5'0"	CASEMENT W/ 18" TRANSOM
12	2'8"x6'0"	CASEMENT
13	2-2'8"x5'0"	CASEMENT
14	2-2'8"x3'6"	CASEMENT
15	2'8"x3'6"	CASEMENT
16	2'8"x5'0"	CASEMENT
17	2-2'8"x5'0"	CASEMENT
18	2'8"x3'0"	CASEMENT
19	2'8"x3'6"	CASEMENT

SQUARE FOOTAGE

MAIN LEVEL HEATED	2831 SQ.FT.
UPPER LEVEL HEATED	2632 SQ.FT.
LOWER LEVEL HEATED	1840 SQ.FT.
TOTAL HEATED	7303 SQ.FT.
COVERED ENTRY	74 SQ.FT.
OUTDOOR LIVING/DINING	583 SQ.FT.
THREE CAR GARAGE	917 SQ.FT.
LOWER TERRACE	814 SQ.FT.
LAWN STORAGE	182 SQ.FT.
WORKSHOP/STORAGE	475 SQ.FT.
TOTAL UNDER ROOF	10,348 SQ.FT.

2ND FLR. FRAMING PLAN

DRAWING: MAIN LEVEL FLOOR PLAN

4/10/12	FLOORS AND ELEVATIONS
4/11/12	FINAL DESIGN

PAGE: S3

SCALE: 1/4"=1'-0"

PROJECT:

CUSTOM DESIGN for the HALLMAN RESIDENCE

127 CADES COVE LANE MOORESVILLE, NC

SEAL:

NORTH CAROLINA PROFESSIONAL ENGINEER SEAL 18933 GARY A. BARNES 4-14-12

GB Engineering
133 Middleton Place
Mooresville, NC 28117
704-671-5339

CUSTOM HOME BY

ashley j design
custom homes and renovations

P.O. BOX 5423 CHARLOTTE, NC 28299
WWW.ASHLEYJDESIGN.COM
704-858-0631