DOOR SCHEDULE

SYMBOL ○

MARK	SIZE	QUAN.	DESCRIPTION
1	3'-0" x 6'-8"	1	EXT., W/ 12" SIDELITES + ARCH TOP TRANSOM *
2	2'-8" x 6'-8"	2	EXT., FULL GLASS W/ 12" TRANSOM *
3	2'-8" x 6'-8"	1	EXT., 1 HOUR FIRE-RATED
4	8'-0" x 7'-0"	2	GARAGE
5	2'-8" x 6'-8"	6	INT.
6	2'-4" x 6'-8"	5	INT.
7	2'-0" x 6'-8"	6	INT.
8	(2) 1'-6" x 6'-8"	2	INT.

* SEE ELEVATION FOR TRANSOM.

PLAN NOTES:

1. VERIFY ALL LOCAL CODES, ENERGY TYPES, AND SITE CONDITIONS PRIOR TO CONSTRUCTION.
2. REVIEW SELECTED MECHANICAL SYSTEMS WITH OWNER PRIOR TO CONSTRUCTION.

   REVIEW SUB-CONTRACTORS LOCATIONS OF THE WATER HEATER AND HVAC UNIT(S) WITH THE OWNER PRIOR TO CONSTRUCTION. VERIFY LOCAL BUILDING CODE REQUIREMENTS AND MANUFACTURER REQUIREMENTS FOR ATTIC, CRAWL SPACE, OR GARAGE LOCATIONS.

   H.V.A.C. EQUIPMENT IN THE ATTIC SPACE SHALL BE ACCESSIBLE BY AN OPENING LARGER THAN THE LARGEST PIECE OF EQUIPMENT (TO ALLOW REMOVAL OF THE EQUIPMENT) AND IN NO CASE LESS THAN 22"x36".
3. SEE STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
4. INSULATE AROUND ALL BATHS AND UTILITY ROOM.
5. TYPICAL WALL, 2x4'S @ 16" O.C., UNLESS OTHERWISE DIMENSIONED.
6. PROVIDE SMOKE DETECTORS AS REQUIRED BY CODE.
7. PROVIDE DOORBELLS, TRANSFORMER, AND CHIME.

ELECTRICAL LEGEND


SYMBOL	DESCRIPTION
⊕	DUPLEX OUTLET (GROUNDED TYPE)
⊕WP	WEATHER PROOF DUPLEX OUTLET
⊕AC	ABOVE COUNTER LOCATION
⊕GFI	FLUSH FLOOR DUPLEX OUTLET, OWNER VERIFY LOCATION
⊕240	220 VOLT OUTLET OR CONNECTION
⊕	CEILING MOUNTED LIGHT FIXTURE
⊕H	WALL BRACKET MOUNTED LIGHT FIXTURE
⊕	SUSPENDED CEILING MOUNTED LIGHT FIXTURE
◧	RECESSED DIRECTIONAL CEILING LIGHT FIXTURE
□	RECESSED CEILING LIGHT FIXTURE
□u	RECESSED LIGHT FOR WET AREA
	UNDER CABINET FLUORESCENT LIGHT
	EXTERIOR CAST ALUMINUM FLOOD LIGHTS
	CEILING MOUNTED PADDLE FAN W/ LIGHT
⊗	CEILING MOUNTED FAN - EXHAUST
	CEILING MOUNTED FAN AND HEATER
	CEILING MOUNTED FAN, LIGHT, AND HEATER

WINDOW SCHEDULE

SYMBOL □

MARK	SIZE	QUAN.	DESCRIPTION
A	1'-8" x 6'-2"	1	DH
	4'-0" x 6'-2"		FIXED W/ CIRCLE HEAD TRANSOM *
	1'-8" x 6'-2"		DH
B	2'-0" x 3'-10"	1	DH
C	2'-0" x 4'-6"	1	DH
D	(2) 2'-0" x 4'-6"	1	DH
E	2'-8" x 5'-2"	2	DH
F	2'-0" x 5'-6"	1	DH
	4'-0" x 5'-6"		FIXED
	2'-0" x 5'-6"		DH
G	(2) 3'-0" x 6'-6"	1	DH
H	2'-0" x 6'-2"	2	DH
J	(2) 2'-4" x 6'-2"	1	DH
K	(2) 2'-0" x 4'-2"	1	DH
L	(2) 3'-0" x 5'-10"	1	DH
M	2'-8" x 5'-10"	2	DH
N	3'-0" x 4'-6"	1	DH
P	2'-0" x 3'-10"	2	DH W/ CIRCLE HEAD TRANSOM *
Q	2'-8" x 3'-10"	2	DH
R	(2) 3'-0" x 3'-10"	1	DH W/ CIRCLE HEAD TRANSOM *
S	(2) 2'-8" x 5'-2"	2	DH


ALL WINDOWS ARE INSULATED AND WEATHERSTRIPPED.
VERIFY LOCAL CODE EGRESS WINDOW REQUIREMENTS PRIOR TO CONSTRUCTION
WINDOW MANUFACTURER TO PROVIDE TEMPERED GLASS WHERE REQUIRED BY CODE.
VERIFY WINDOW MODEL NUMBERS AND SIZES WITH MANUFACTURER BEFORE STARTING CONSTRUCTION.
* SEE ELEVATION FOR TRANSOM.

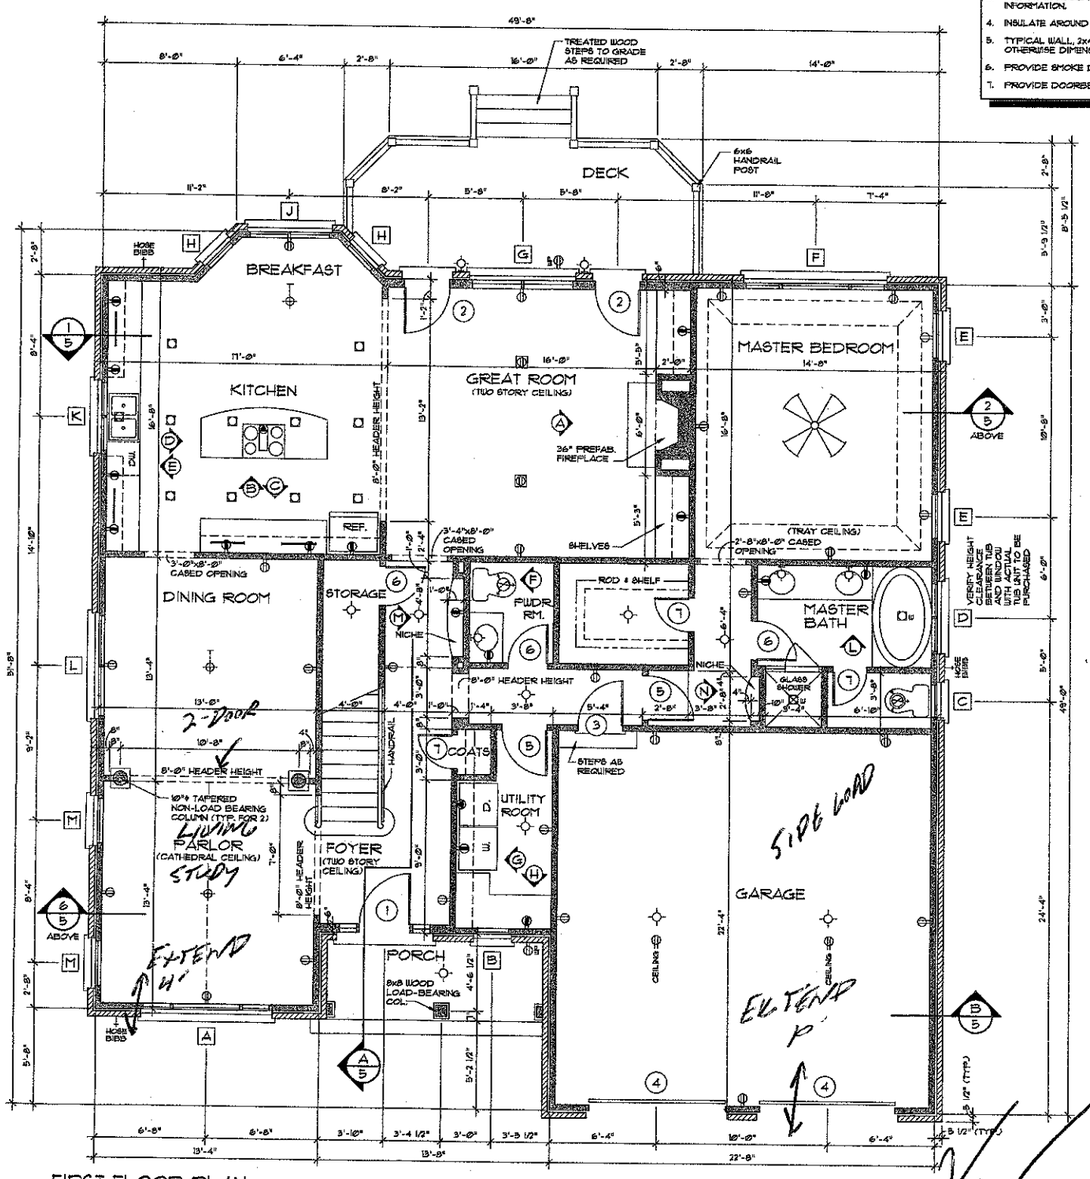

FIRST FLOOR PLAN

1/4" = 1'-0"

FIRST FLOOR	1808 sq. ft.
SECOND FLOOR	869 sq. ft.
TOTAL LIVING	2678 sq. ft.
GARAGE & STORAGE	528 sq. ft.
BONUS ROOM	320 sq. ft.

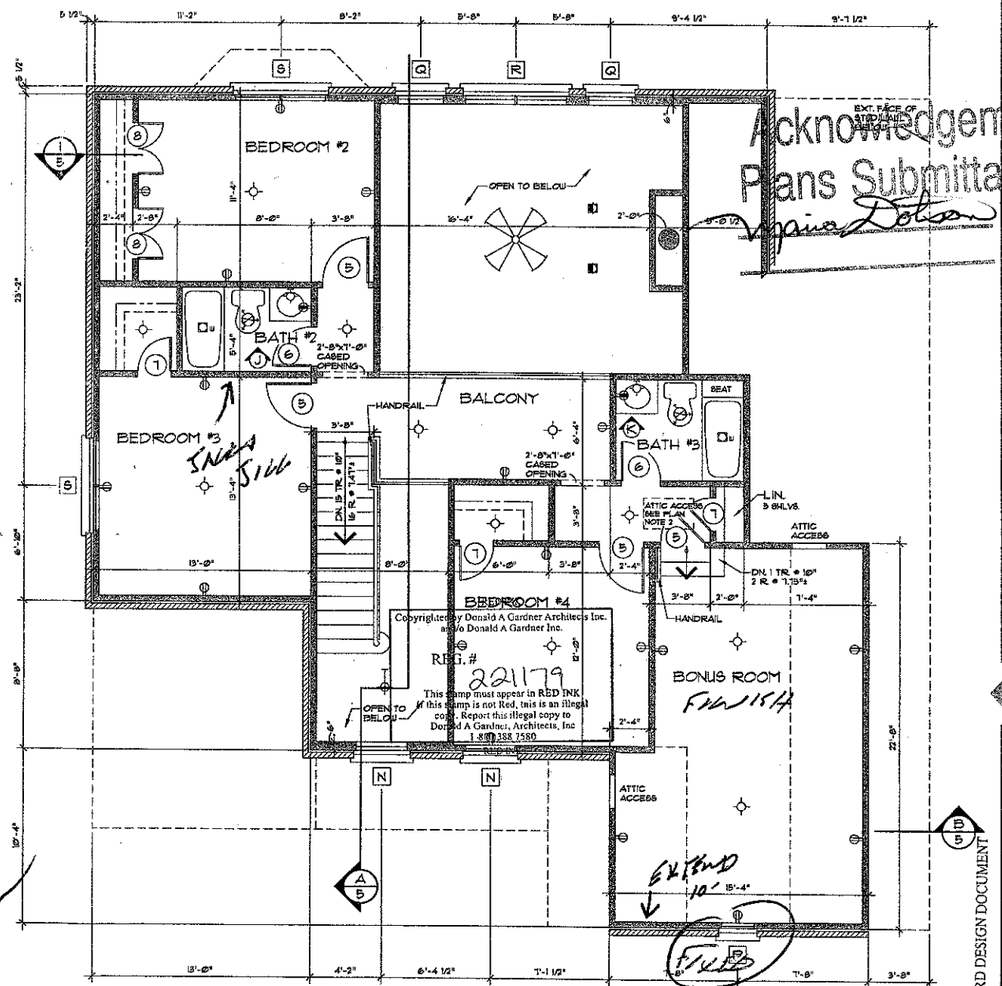

SECOND FLOOR PLAN

1/4" = 1'-0"

IN GABLE ABOVE

1/4" = 1'-0"

Acknowledgement Of Plans Submittal ONLY
Date 2/1/05
Date

ALL FEDERAL, STATE, AND LOCAL CODES, ORDINANCES, REGULATIONS ETC. SHALL BE CONSIDERED AS PART OF SPECIFICATIONS FOR THIS BUILDING AND SHALL TAKE PREFERENCE OVER ANYTHING SHOWN, DESCRIBED, OR MIS-USED WHERE SAME ARE AT VARIANCE

DONALD A. GARDNER, INC.
ARCHITECTS • PLANNERS
BOX 26178 • GREENVILLE S.C. • 29616
864 • 288 • 7580
www.dongardner.com/BP

STATE OF SOUTH CAROLINA — DONALD A GARDNER — GREENVILLE, S.C. — 1614 — REGISTERED ARCHITECT

STANDARD DESIGN DOCUMENT

DESIGN NO. 947
SHEET 3 OF 7 DR LMC
FLOOR PLAN

DO NOT SCALE DRAWINGS.
COPYRIGHT @ 9/17/01 ALL RIGHTS RESERVED BY DONALD A. GARDNER, INC.
NOT TO BE COPIED OR REPRODUCED WITHOUT WRITTEN PERMISSION