WINDOW SCHEDULE				
NO.	QTY.	SIZE	TYPE	LOCATION
A	1	OVAL (SEE DIMENSIONS THIS SHEET)	DIRECT SET	FOYER
B	4	2526	DIRECT SET	KITCHEN
C	2	2573	DOUBLE HUNG	CARRIAGE HOUSE
D	2	2573-2	DOUBLE HUNG	DINING, ROMAN BATH (TEMPERED)
E	8	2525	DIRECT SET	POTTING SHED
F	1	2523	DIRECT SET	CARRIAGE HOUSE
G	3	2563	DOUBLE HUNG	KITCHEN, ROMAN BATH, GUEST BATH
H	1	2363-4 WITH 2923-4 TRANSOM	DOUBLE HUNG WITH TRANSOM ABOVE	LEARNING CENTER
J	13	2973	DOUBLE HUNG	CARRIAGE HOUSE, LAUNDRY ROOM, BREAKFAST, GATHERING ROOM,
				MASTER BEDROOM, ROMAN BATH, GUEST
K	4	2973-2	DOUBLE HUNG	GATHERING ROOM, RCC 100%
L	5	2973-3	DOUBLE HUNG	MASTER BEDROOM, BREAKFAST, GUEST, BEDROOM 1, BEDROOM 2
M	1	4 x 4	GLASS BLOCK	HER CLOSET
N	1	4 x 2	GLASS BLOCK	ROMAN BATH

DOOR SCHEDULE			
NO.	QTY.	SIZE	TYPE
1	1	SEE DIMENSIONS SHEET A7a	FRONT DOOR
2	2	3'-0" x 8'-0"	EXTERIOR FRENCH DOOR
3	1	3'-0" x 8'-0"	EXTERIOR PANEL DOOR
4	4	2'-8" x 8'-0"	EXTERIOR PANEL DOOR
5	5	2'-8" x 6'-8" or 8'-0"	INTERIOR PANEL DOOR
6	0	2'-6" x 6'-8" or 8'-0"	INTERIOR PANEL DOOR
7	16	2'-4" x 6'-8" or 8'-0"	INTERIOR PANEL DOOR
8	2	2'-0" x 6'-8" or 8'-0"	INTERIOR PANEL DOOR
9	3	9'-0" x 8'-0"	GARAGE DOOR

WINDOW A

2 A2a SCHEDULES

BUILDING CODE RELATED NOTES:

STRICT COMPLIANCE WITH ALL PORTIONS OF THE 2002 EDITION OF THE NORTH CAROLINA RESIDENTIAL CODE IS REQUIRED. ANY DISCREPANCIES BETWEEN THESE DRAWINGS AND THE CODE SHOULD BE BROUGHT TO THE ARCHITECT'S IMMEDIATE ATTENTION.


1. PROVIDE A 20 MIN. FIRE RATED DOOR BETWEEN ANY PARKING GARAGE AND HABITABLE SPACES.
2. 1/2" DRYWALL IN GARAGE @ ALL WALLS ABUTTING HABITABLE SPACES & @ CEILING, TAPE & FINISH FOR PAINTING.
3. EXTERIOR STEPS - MAXIMUM RISER - 7 1/2" MINIMUM TREAD - 11" (W/ NO NOSING) RAIL REQ'D IF 4) OR MORE RISERS MOUNT 30" TO 38" ABV. TREAD NOSING BALUSTER SPACING - 4" MAXIMUM
4. INTERIOR STEPS - MAXIMUM RISER - 7 3/4" MINIMUM TREAD - 10" (W/ 1" NOSING) RAIL REQ'D IF 4) OR MORE RISERS MOUNT 30" TO 38" ABV. TREAD NOSING BALUSTER SPACING - 4" MAXIMUM
5. BALCONY RAILING IS REQUIRED IF OVER 30" ABV. ADJ. GRADE MINIMUM 36" HIGH, BALUSTER SPACING - 4" MAXIMUM
6. USE MARKED TEMPERED WINDOW GLASS IN BATHS IF OVER TUBS OR WHEN WITHIN 18" HORIZONTALLY OF AN EXTERIOR DOOR
7. R7 MINIMUM - ATTIC ACCESS - INSULATE AND WEATHERSTRIP
8. R15 MINIMUM - WALL ASSEMBLY
9. R19 MINIMUM - CRAWLSPACE/FLOOR ASSEMBLY
10. R30 MINIMUM - CEILING/ATTIC ASSEMBLY USE BATTS OR BLOW-IN
11. ALL SOIL BELOW SLABS MUST BE PRE-TREATED FOR TERMITES. CONCRETE SLABS ARE TO BE 3000 PSI / 3# x 6" DRAINABLE GRAVEL / 6# 6 MIL POLY / 6# REA COMPACTED SOIL. MACHINE FLOAT TO SLICK FINISH - SLOPE 1/16" PER FOOT
12. EXIT PERIMETER FRENCH DRAIN TO DAYLIGHT

4 Bedrooms

Acknowledgement Of Plans Submittal ONLY!

Date 11/14/03

Date 11-14-03

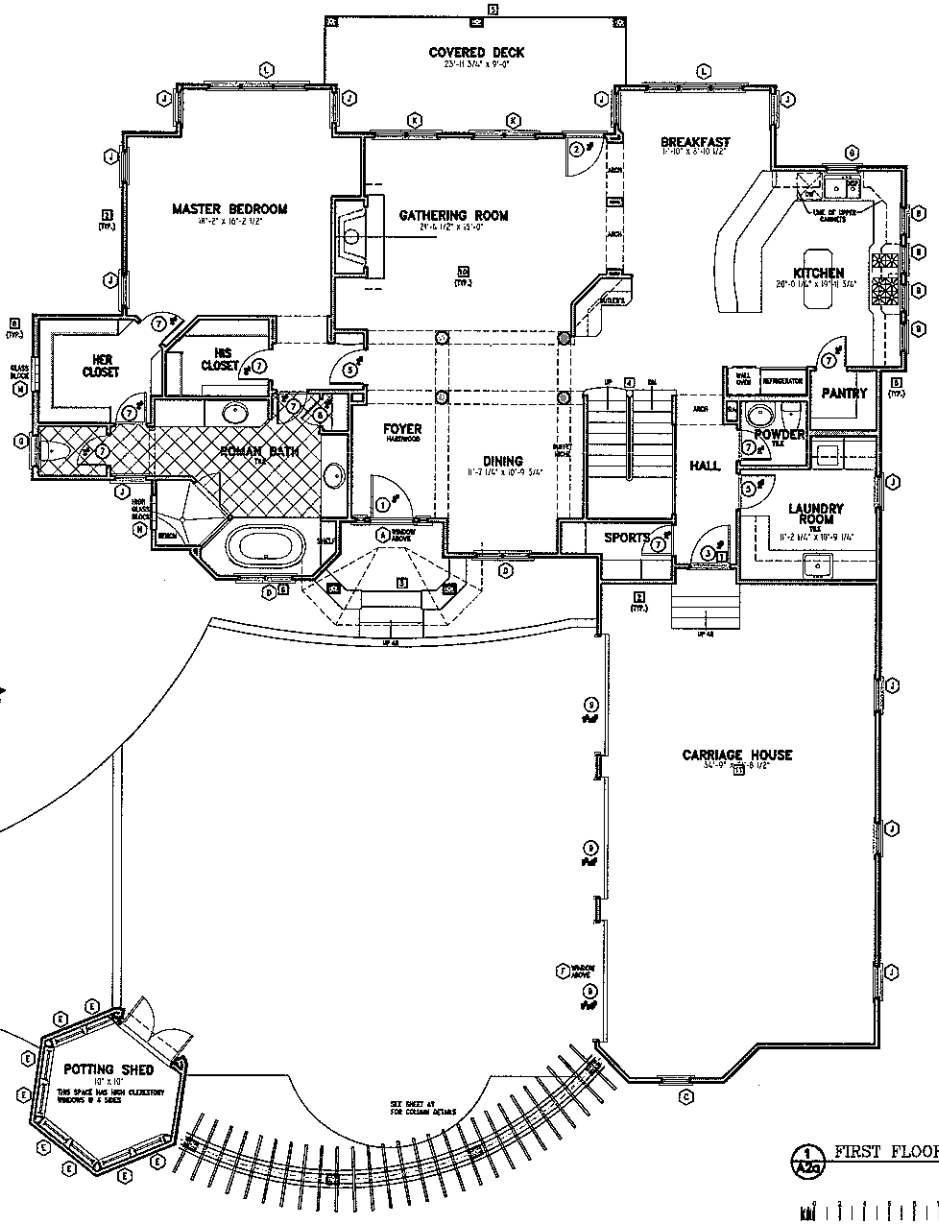

1 A2a FIRST FLOOR PLAN
1/4 = 1'-0"

.GIBLIN. ARCHITECTURE

6128 FALLSTON RD
CHARLOTTE, NC 28212
704-341-6868 (FAX)
704-641-2889

50705 REGISTERED ARCHITECT


Jon Giblin

prepared for:
a new residence for:
lakeland luxury lot 297 the point
wild harbor road

DATE: OCT. 30, 2003 REVISED: NOV. 3, 2003

FIRST FLOOR PLAN

A2

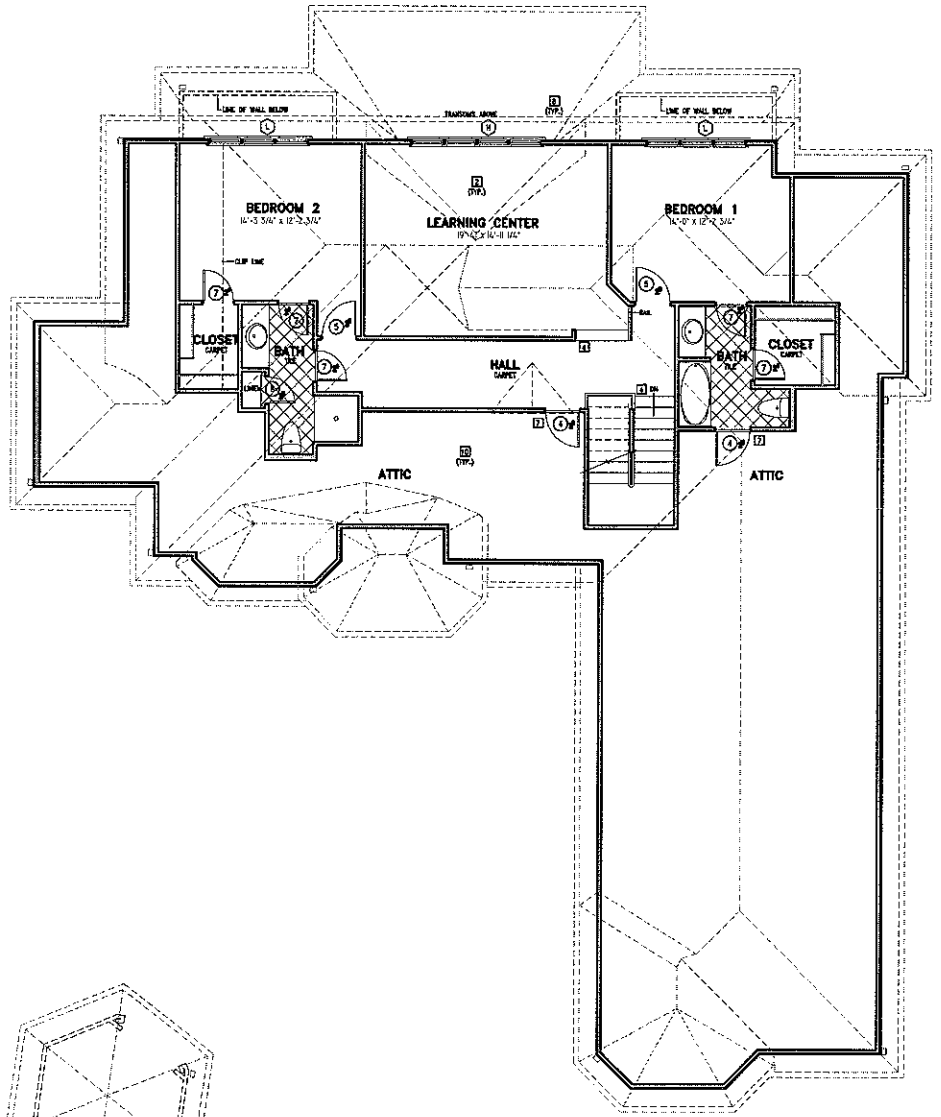

BUILDING CODE RELATED NOTES

STRICT COMPLIANCE WITH ALL PORTIONS OF THE 2003 EDITION OF THE NORTH CAROLINA RESIDENTIAL CODE IS REQUIRED. ANY DISCREPANCIES BETWEEN THESE DRAWINGS AND THE CODE SHOULD BE BROUGHT TO THE ARCHITECT'S IMMEDIATE ATTENTION.

1. PROVIDE A 20 MIN. FIRE RATED DOOR BETWEEN ANY PARKING GARAGE AND HABITABLE SPACES.
2. 1/2" DRYWALL IN GARAGE @ ALL WALLS ABUTTING HABITABLE SPACES & @ CEILING; TAPE & FINISH FOR PAINTING.
3. EXTERIOR STEPS - MAXIMUM RISER - 7 3/4"
   MINIMUM TREAD - 11" (W/ NO NOSING)
   RAIL REQ'D IF 4 OR MORE RISERS
   MOUNT 30" TO 36" ABV. TREAD NOSING
   BALUSTER SPACING - 4" MAXIMUM
4. INTERIOR STEPS - MAXIMUM RISER - 7 3/4"
   MINIMUM TREAD - 10" (W/ 1" NOSING)
   RAIL REQ'D IF 4 OR MORE RISERS
   MOUNT 30" TO 34" ABV. TREAD NOSING
   BALUSTER SPACING - 4" MAXIMUM
5. BALCONY RAILING IS REQUIRED IF OVER 30" ABV. ADJ. GRADE MINIMUM 36" HIGH, BALUSTER SPACING - 4" MAXIMUM
6. USE MARKED TEMPERED WINDOW GLASS IN BATHS W/ OVER TUBS OR WITHIN 18" HORIZONTALLY OF AN EXTERIOR DOOR
7. R7 MINIMUM - ATTIC ACCESS - INSULATE AND WEATHERSTRIP
8. R13 MINIMUM - WALL ASSEMBLY
9. R18 MINIMUM - CRAWLSPACE/FLOOR ASSEMBLY
10. R30 MINIMUM - CEILING/ATTIC ASSEMBLY USE BATTS OR BLOW-IN
11. ALL SOIL HOLLOW GLASS MUST BE PRE-TREATED FOR TERMITES. CONCRETE SLABS ARE TO BE 3000 PSI / ON 4" DRAINABLE GRAVEL / ON 6 MIL. POLY / ON REAL COMPACTED SOIL. MACHINE FLOAT TO SLICK FINISH - SLOPE 1/10" PER FOOT
12. EXT PERIMETER FRENCH DRAIN TO DAYLIGHT

1 A2b SECOND FLOOR PLAN
1/4 = 1'-0"

GBLIN ARCHITECTURE


50705

a new residence for :
lakeland luxury lot 297 the point
wild harbor road

DATE: OCT. 30, 2008 REVISED:

SECOND FLOOR PLAN

A2

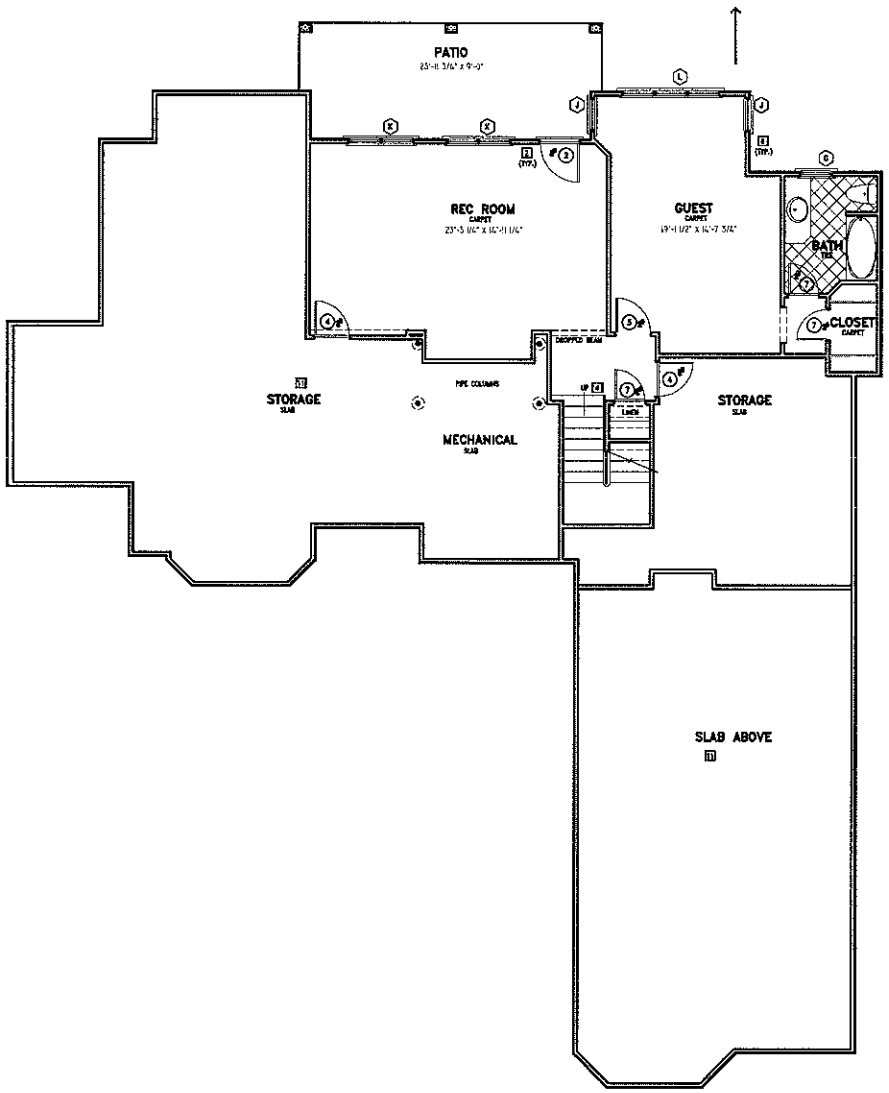

BUILDING CODE RELATED NOTES

STRICT COMPLIANCE WITH ALL PORTIONS OF THE 2002 EDITION OF THE NORTH CAROLINA RESIDENTIAL CODE IS REQUIRED. ANY DISCREPANCIES BETWEEN THESE DRAWINGS AND THE CODE SHOULD BE BROUGHT TO THE ARCHITECT'S IMMEDIATE ATTENTION.

1. PROVIDE A 20 MIN. FIRE RATED DOOR BETWEEN ANY PARKING GARAGE AND HABITABLE SPACES.
2. 1/2" DRYWALL IN GARAGE @ ALL WALLS ABUTTING HABITABLE SPACES & @ CEILING, TAPE & FINISH FOR PAINTING.
3. EXTERIOR STEPS - MAXIMUM RISER - 7 3/4" MINIMUM TREAD - 11" (W/ NO NOSING) RAIL ENDS IF 4) OR MORE RISERS MOUNT 30" TO 34" ABV. TREAD NOSING BALUSTER SPACING - 4" MAXIMUM
4. INTERIOR STEPS - MAXIMUM RISER - 7 3/4" MINIMUM TREAD - 10" (W/ 1" NOSING) RAIL ENDS IF 4) OR MORE RISERS MOUNT 30" TO 34" ABV. TREAD NOSING BALUSTER SPACING - 4" MAXIMUM
5. BALCONY RAILING IS REQUIRED IF OVER 30" ABV. ADJ. GRADE MINIMUM 36" HIGH, BALUSTER SPACING - 4" MAXIMUM
6. USE MARKED TEMPERED WINDOW GLASS IN BATHS W/ OVER TUBS OR WHEN WITHIN 18" HORIZONTALLY OF AN EXTERIOR DOOR
7. R7 MINIMUM - ATTIC ACCESS - INSULATE AND WEATHERSTRIP
8. R13 MINIMUM - WALL ASSEMBLY
9. R19 MINIMUM - CRAWLSPACE/FLOOR ASSEMBLY
10. R30 MINIMUM - CEILING/ATTIC ASSEMBLY USE BATTS OR BLOW-IN
11. ALL SOIL BELOW SLABS MUST BE PRE-TREATED FOR TERMITES. CONCRETE SLABS ARE TO BE 3000 PSI / ON 6" DRAINABLE GRAVEL / ON 6 MIL POLY / ON WELL COMPACTED SOIL. MACHINE FLOAT TO SLICK FINISH - SLOPE 1/10" PER FOOT
12. EXT. PERIMETER FRENCH DRAIN TO DAYLIGHT

1 A2c BASEMENT FLOOR PLAN
1/4 = 1'-0"

.GIBLIN. ARCHITECTURE
8318 FALLSTON RD
GAILEYVILLE, VA 24557
PH: 540.666.7143
FX: 540.666.3488

50705

Jon Giblin

a new residence for :
lakeland luxury lot 297
the point
wild harbor road

A2

DATE: OCT. 26, 2005 REVISED:

BASEMENT FLOOR PLAN