DOOR SCHEDULE

MARK	SIZE	QUAN.	DESCRIPTION
1	3'-0" x 6'-8"	1	EXT., THREE-QUARTER GLASS, [illegible]
2	(2) 2'-6" x 6'-8"	2	EXT., FULL GLASS, W/ 12" TRANSOM
3	2'-8" x 6'-8"	1	EXT., 1 MODE PANEL-INSULATED
4	16'-0" x 8'-0"	1	GARAGE
5	2'-6" x 6'-8"	6	INT.
6	2'-4" x 6'-8"	3	INT.
7	2'-6" x 6'-8"	6	INT.
8	(2) 2'-6" x 6'-8"	4	INT.

SYMBOL

WINDOW SCHEDULE

MARK	SIZE	QUAN.	DESCRIPTION
A	(2) 2'-8" x 5'-10"	1	DH
B	2'-8" x 5'-10"	1	DH
C	(2) 2'-8" x 5'-2"	2	DH, W/ 24" TRANSOM*
D	2'-4" x 4'-8"	3	DH, ARCH TOP
E	(2) 2'-8" x 5'-2"	1	CSMT, ARCH TOP W/ SHADED MULLION
F	(2) 2'-8" x 6'-2"	4	DH
G	(3) 2'-8" x 6'-2"	2	DH
H	2'-8" x 4'-2"	1	DH
J	4'-8" x 4'-2"	1	FIXED
K	7'-9 1/2" x 7'-3 1/2"	4	* VELUX SKYLIGHT FSP-1064
L	2'-8" x 6'-2"	1	DH

SYMBOL

ALL WINDOWS ARE INSULATED AND WEATHERSTRIPPED.
VERIFY LOCAL CODE EGRESS WINDOW REQUIREMENTS PRIOR TO CONSTRUCTION.
WINDOW MANUFACTURER TO PROVIDE TEMPERED GLASS WHERE REQUIRED BY CODE.
* SEE ELEVATION FOR TRANSOM.
* VERIFY SKYLIGHT INSTALLATION REQUIREMENTS BEFORE CONSTRUCTION. IF CURB INSTALLATION IS RECOMMENDED DUE TO CLIMATIC CONDITIONS, MODEL NUMBER AND/OR ROUGH OPENING SIZE MAY VARY.

ELECTRICAL LEGEND


SYMBOL	DESCRIPTION
	DUPLEX OUTLET (GROUNDED TYPE)
WP	WEATHER PROOF DUPLEX OUTLET
	ABOVE COUNTER LOCATION
	FLUSH FLOOR DUPLEX OUTLET, OWNER VERIFY LOCATION
	220 VOLT OUTLET OR CONNECTION
	CEILING MOUNTED LIGHT FIXTURE
	WALL BRACKET MOUNTED LIGHT FIXTURE
	SUSPENDED CEILING MOUNTED LIGHT FIXTURE
	RECESSED DIRECTIONAL CEILING LIGHT FIXTURE
	RECESSED CEILING LIGHT FIXTURE
	RECESSED LIGHT FOR WET AREA
	UNDER COUNTER FLUORESCENT LIGHT
	EXTERIOR CAST ALUMINUM FLOOD LIGHTS
PL	CEILING MOUNTED PADDLE FAN W/ LIGHT
	CEILING MOUNTED FAN - EXHAUST
	CEILING MOUNTED FAN AND HEATER
	CEILING MOUNTED FAN, LIGHT, AND HEATER

PLAN NOTES:


1. VERIFY ALL LOCAL CODES, ENERGY TYPES A AND SITE CONDITIONS PRIOR TO CONSTRUCTION.
2. REVIEW SELECTED MECHANICAL SYSTEMS WITH OWNER PRIOR TO CONSTRUCTION.

   REVIEW SUB-CONTRACTORS LOCATIONS OF THE WATER HEATER AND HVAC UNIT(S) WITH THE OWNER PRIOR TO CONSTRUCTION. VERIFY LOCAL BUILDING CODE REQUIREMENTS AND MANUFACTURER REQUIREMENTS FOR ATTIC, CRAWL SPACE, OR GARAGE LOCATIONS.

   H.V.A.C. EQUIPMENT IN THE ATTIC SPACE SHALL BE ACCESSIBLE BY AN OPENING LARGER THAN THE LARGEST PIECE OF EQUIPMENT (TO ALLOW REMOVAL OF THE EQUIPMENT) AND IN NO CASE LESS THAN 22"x36".
3. SEE STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
4. INSULATE AROUND ALL BATHS AND UTILITY ROOM.
5. TYPICAL WALL, 2x4'S @ 16" O.C. UNLESS OTHERWISE DIMENSIONED.
6. PROVIDE SMOKE DETECTORS AS REQUIRED BY CODE.
7. PROVIDE DOORBELL, TRANSFORMER, AND CHIME.

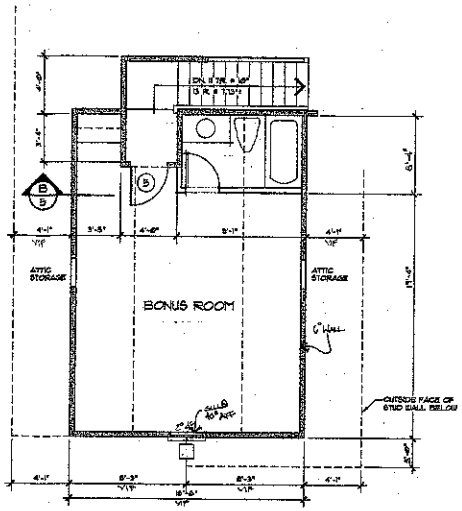


BONUS ROOM FLOOR PLAN 1/4" = 1'-0"

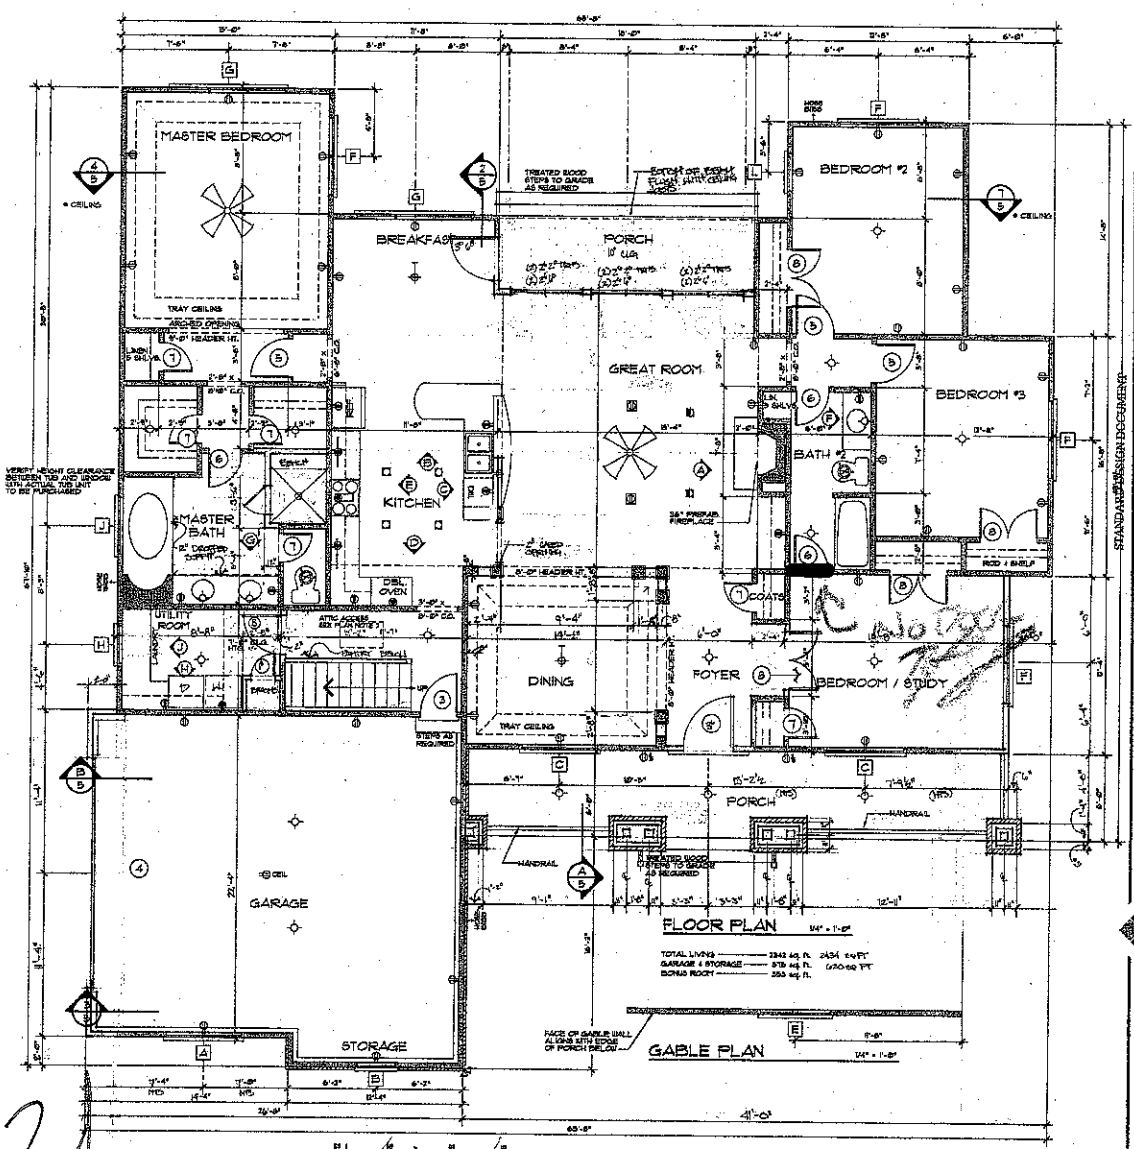

FLOOR PLAN 1/4" = 1'-0"

TOTAL LIVING — 2342 sq. ft. 2434 sq. ft.
GARAGE & STORAGE — 978 sq. ft. 978 sq. ft.
BONUS ROOM — 355 sq. ft.

GABLE PLAN 1/4" = 1'-0"

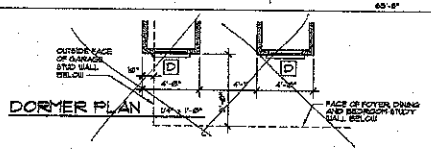

DORMER PLAN 1/4" = 1'-0"

BY A.B. 4-22-09

NOTICE TO ALL REPRODUCERS
REG. # 8945-A
It's a violation of the Federal Copyright Act to print these plans unless this notice appears in red and the Customer has a letter of release from DONALD A. GARDNER ARCHITECTS, Inc. If you suspect this to be an illegal copy, please call 1-800-388-7638.
These plans may be used to construct ONE house only and the license AGREEMENT is per client. See architect's board before the purchase.
NOTICE TO ALL REPRODUCERS

DO NOT SCALE DRAWINGS.
COPYRIGHT © 11/19/08 ALL RIGHTS RESERVED BY DONALD A. GARDNER, INC. NOT TO BE COPIED OR REPRODUCED WITHOUT WRITTEN PERMISSION

ALL FEDERAL, STATE, AND LOCAL CODES, ORDINANCES, REGULATIONS ETC. SHALL BE CONSIDERED AS PART OF SPECIFICATIONS FOR THIS BUILDING AND SHALL TAKE PREFERENCE OVER ANYTHING SHOWN, DESCRIBED, OR INFERED WHERE THAT MAY BE VARIANCE

STANDARD DESIGN DOCUMENT

SOUTH CAROLINA REGISTERED ARCHITECT DONALD A. GARDNER NO. 10814

DONALD A. GARDNER, INC.
ARCHITECTS • PLANNERS
P.O. BOX 26178 • GREENVILLE S.C. • 29616
864 • 288 • 7580
www.dongardner.com

DESIGN NO. 1144
SHEET 3 OF 8 8
FLOOR PLAN