
Allen Howard
Lot 5 Wildlife Bay

PUMP TANK DESIGN

ATTACHMENT TO ~~PROPERTY DESCRIPTION~~ Per TT # 7698

~~PIN~~ ~~TAX MAP~~ # 47 4639734550

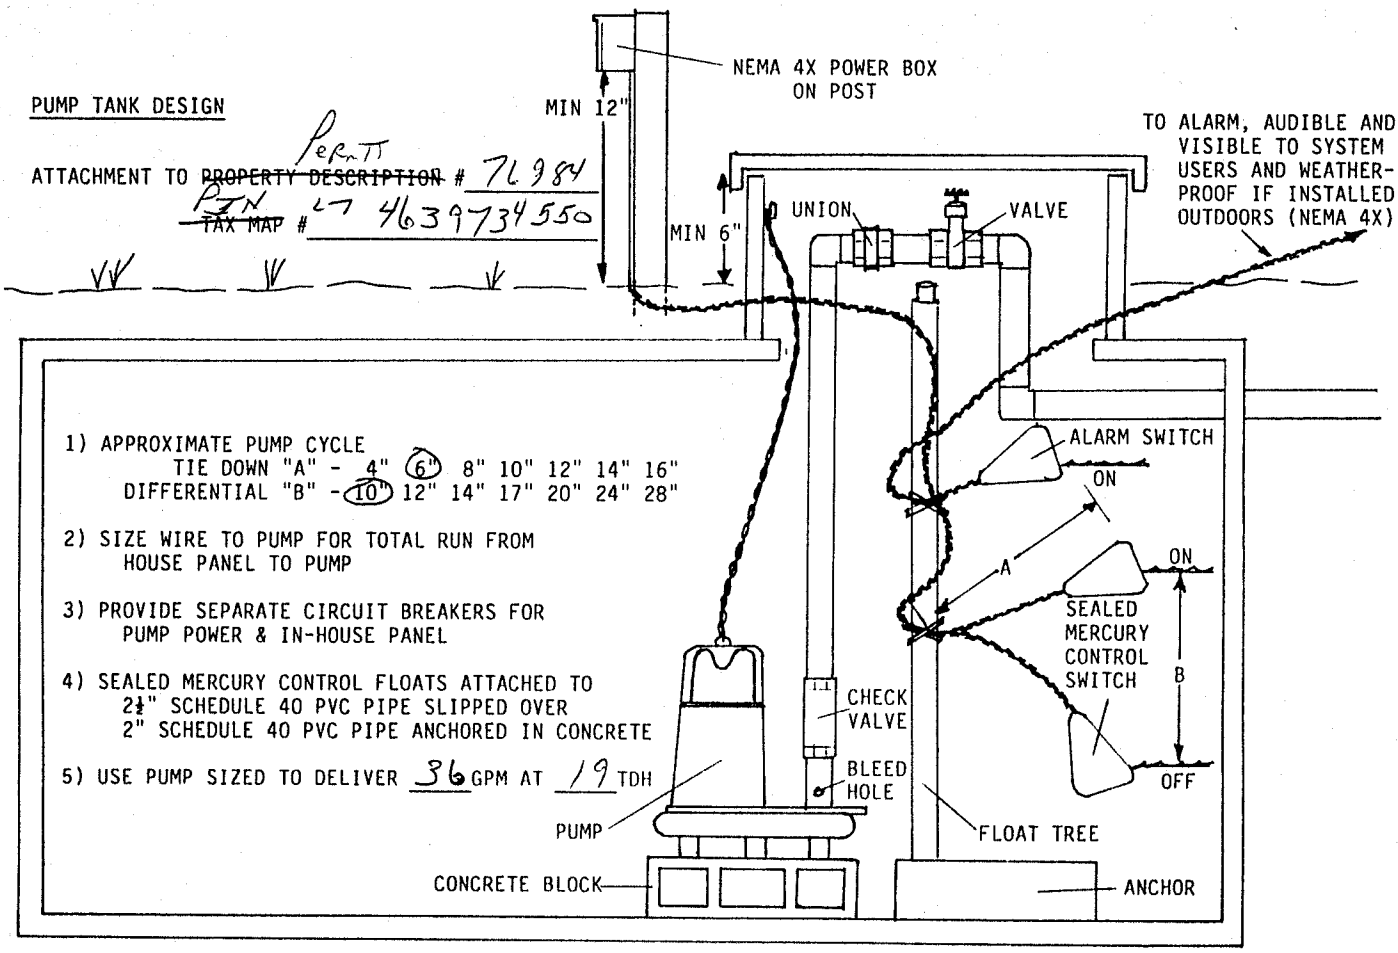

1) APPROXIMATE PUMP CYCLE
TIE DOWN "A" - 4" (6") 8" 10" 12" 14" 16"
DIFFERENTIAL "B" - (10") 12" 14" 17" 20" 24" 28"

2) SIZE WIRE TO PUMP FOR TOTAL RUN FROM HOUSE PANEL TO PUMP

3) PROVIDE SEPARATE CIRCUIT BREAKERS FOR PUMP POWER & IN-HOUSE PANEL

4) SEALED MERCURY CONTROL FLOATS ATTACHED TO 2½" SCHEDULE 40 PVC PIPE SLIPPED OVER 2" SCHEDULE 40 PVC PIPE ANCHORED IN CONCRETE

5) USE PUMP SIZED TO DELIVER 36 GPM AT 19 TDH