14581

IREDELL COUNTY HEALTH DEPARTMENT

IMPROVEMENT PERMIT AND CERTIFICATE OF COMPLETION / OPERATIONS PERMIT

OWNER OR CONTRACTOR M.I. Homes DATE 5/14/92 PERMIT NO. 25-23-A-24

PHONE: Business 376-4800 Home _____

LOCATION Side of Pine Rd. - L off 1100 - TR into Pine Isle to 4th lot on (R)

S.R. No. _____

SUBDIVISION NAME Pine Isle LOT NO. 26 SECTION OR BLOCK NO. 1

House ☑ Mobile Home ☐ Business ☐ Other _____

No. Bedrooms 4 No. Bathrooms 3.5

Garbage Disposal Unit Yes ☑ No ☐

Auto. Dishwasher Yes ☑ No ☐

Auto. Wash. Machine Yes ☑ No ☐

Lot Area 20,000 FT²

Soil Characteristics P - C (SHK - SF)


Application Rate P .3

Topography P - 5%

Depth to Water Table 5 - > 48"

Rock or other impervious formations 5 - None Observed.

_____ Basement with Plumbing _____ Basement without Plumbing ✓ No Basement ✓ Crawl Space

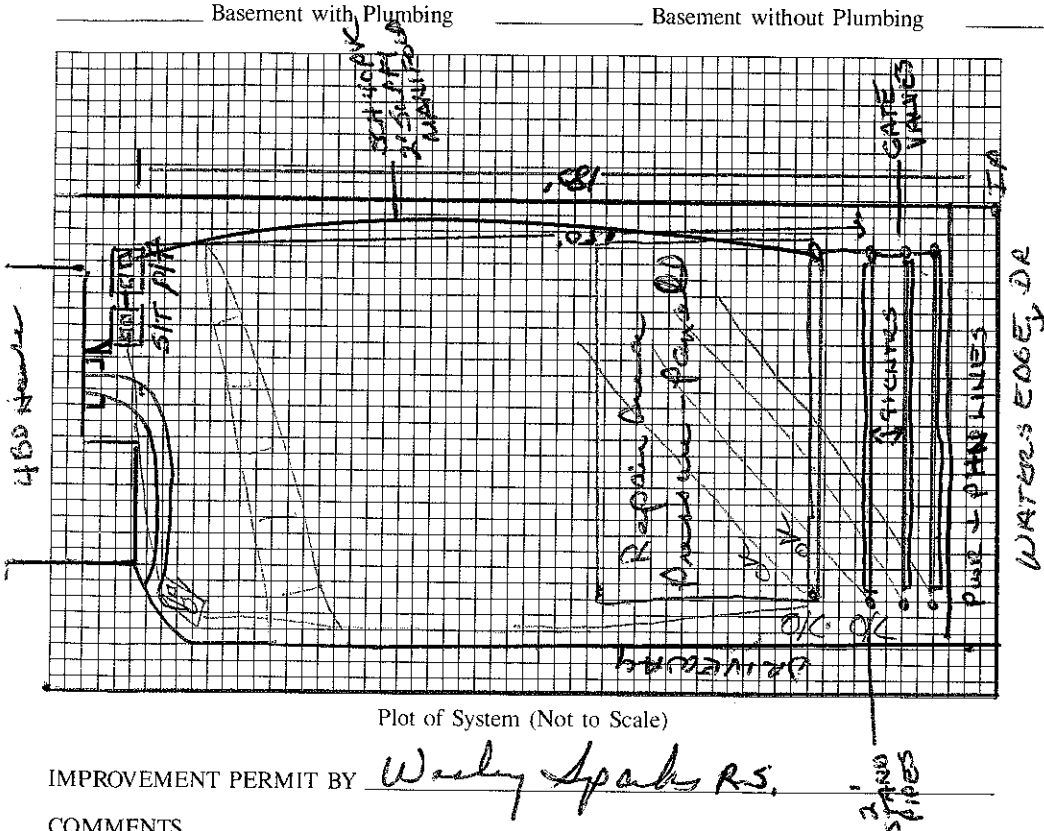

Plot of System (Not to Scale)

Size of Tank 1500 / 1500 Gals.

Nitrification Field: RWS

No. of Lines 4 @ 70' x 2'

Sq. Ft. _____ Linear Ft. 266 *

Depth of Stone in Lines _____

Water Supply: Individual ☐ Public ☐

* 16" Prefabricated Panel Bed Pressure Dosed

Installed by _____

I understand and agree to install a septic tank system as specified on this Improvement Permit.

Signed: _____

(IMPROVEMENT PERMIT IS VALID FOR 60 MONTHS FROM DATE OF ISSUE.)

IMPROVEMENT PERMIT BY Wesley Sparks R.S.

COMMENTS 1¼ PVC continuous through panels - 5/32" hole per panel drilled with hole turned up instead of down - 2' pressure head at end of each lateral. Approximately 35 GPM pump required

CERTIFICATE OF COMPLETION BY _____ DATE _____

EXISTING SYSTEM CHECKED BY _____ DATE _____

CONSTRUCTION MUST COMPLY WITH ALL OTHER APPLICABLE STATE AND LOCAL REGULATIONS

Permit is VOID if any unauthorized changes are made in installation of system, and/or if any unapproved changes are made to the site, and/or if any false information is supplied toward securing Improvement Permit.

Health Dept. Copy: White Inspection Dept. Copy: Yellow Sanitarian's Copy: Pink Owner's Copy: Gold

8/25/92 Checked Drainfield, RWS; Checked tanks, set pressure, tested alarm 8/26/92