
Acknowledgement of Plans Submittal ONLY!

Date 6/27/16

Date 6/27/16

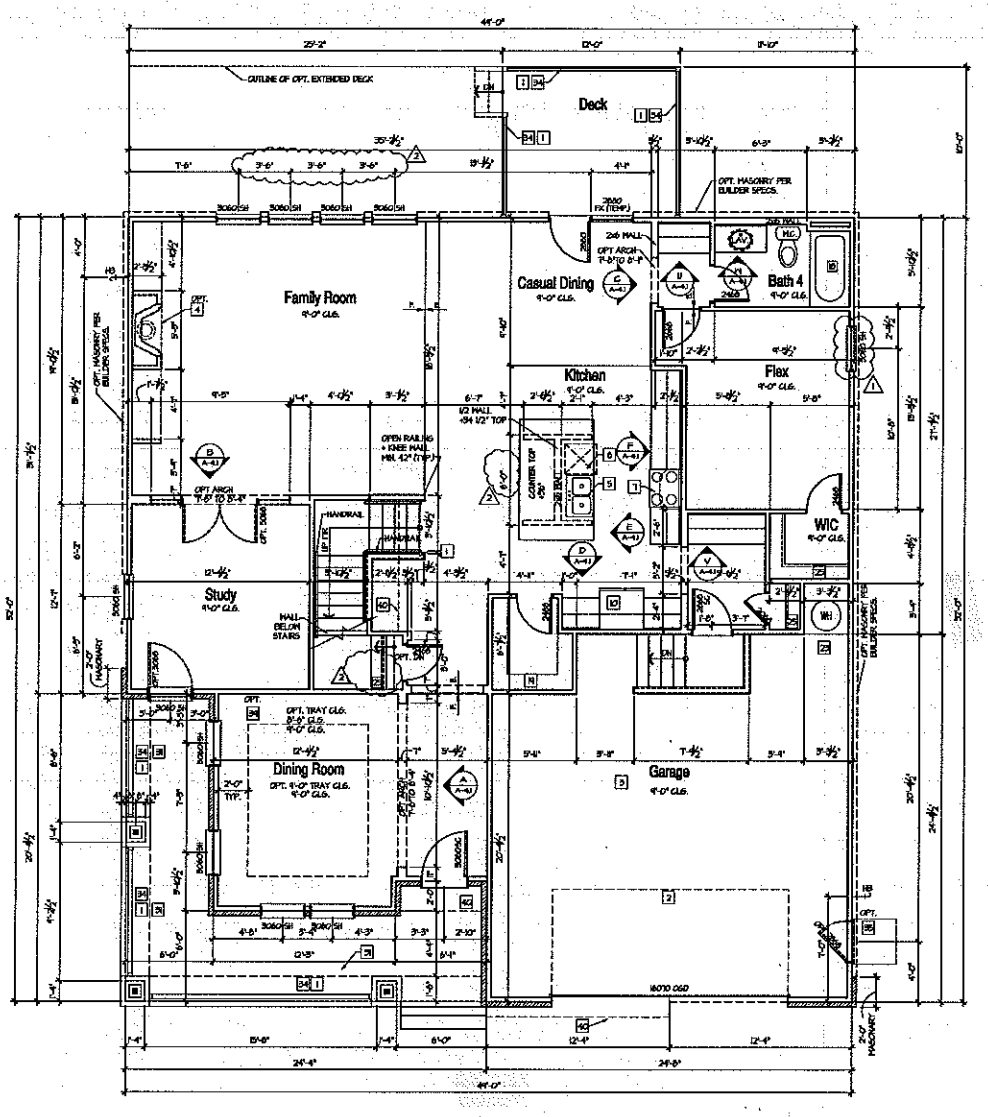

Main Floor Plan - E

0 2' 4' 8'

TYPICAL CONSTRUCTION ASSEMBLIES:

A. TYPICAL ROOF CONSTRUCTION:
ASPHALT ROOF SHINGLES

B. TYPICAL FRAME FLOOR CONSTRUCTION:
FINISH FLOORING ON 3/4" TONGUE & GROOVE FLOOR SHEATHING ON FLOOR TRUSSES OR FLOOR JOISTS AS NOTED ON STRUCTURAL DRAWINGS.

C. SLAB ON GRADE FLOOR CONSTRUCTION:
4" CONCRETE SLAB, EXCEPT AS SPECIFIED BY SOIL REPORT, AND STRUCTURAL ENGINEER. INCLUDE VAPOR BARRIER PER SECTION IV, C, 3, a.

D. WINDOWS:
A. ALL WINDOWS SHALL COMPLY WITH MINIMUM STANDARDS OUTLINED IN APPLICABLE RES. CHECKS.
B. WINDOW SUPPLIER TO VERIFY AT LEAST ONE WINDOW IN ALL BEDROOMS TO HAVE A CLEAR EGRESS OPENING OF 5.1 SQ. FT. WITH MIN. DIMENSION OF 24" IN HEIGHT AND 20" IN WIDTH; SILL HEIGHT NOT GREATER THAN 44" ABOVE FLOOR.
C. TYPICAL WINDOW HEAD HEIGHT:
7'-0" A.F.F. @ 8'-1 1/8" PLATE HEIGHT (U.N.O.)
8'-0" A.F.F. @ 9'-1 1/8" PLATE HEIGHT (U.N.O.)

E. ELECTRICAL:
ALL ELECTRICAL AND MECHANICAL EQUIPMENT & METERS ARE SUBJECT TO RELOCATION DUE TO FIELD CONDITIONS; CONTRACTOR TO VERIFY.

F. HVAC:
PROVIDE BACK DRAFT DAMPERS @ DRYER VENT, HOOD VENT, & EXHAUST FANS.

G. SMOKE ALARMS:
INSTALL PER LOCAL CODE.

H. DIMENSIONS:
ALL DIMENSIONS ARE TO THE FACE OF STUD, U.N.O.

I. ALL EXTERIOR DIMENSIONS ARE TO FACE OF STUDS UNLESS OTHERWISE NOTED.

J. ALL ANGLED PARTITIONS ARE 45 DEGREES UNLESS OTHERWISE NOTED.

K. BRACE BOARDS:
INSTALL PER LOCAL CODE.

FLOOR PLAN NOTES:

[NOTE FLOOR]

6 THE FOLLOWING KEYNOTES REFERENCE THE SYMBOLS AS SHOWN ON PLANS.

1. IF RAILING / GUARDRAIL IS PROVIDED, ALL RAILING / GUARDRAIL BALUSTERS TO BE SPACED SUCH THAT A 4" SPHERE CANNOT PASS BETWEEN BALUSTERS. RAILING/HANDRAILS ARE TO BE AT A 34" MINIMUM TO 38" MAXIMUM HEIGHT A.F.F. FOR STAIRS AND 36" MINIMUM ON HORIZONTAL SURFACE GUARDS.
2. LINE OF OVERHEAD GARAGE DOOR IN OPEN POSITION.
3. SLOPE GARAGE FLOOR 1/8" PER FOOT TOWARD OVERHEAD GARAGE DOOR OPENING.
4. FIREPLACE, AS SPECIFIED BY BUILDER. INSTALL PER MANUFACTURERS SPECIFICATIONS. ALL FACTORY BUILT FIREPLACES SHALL COMPLY WITH LOCAL CODES
5. SINK W/ GARBAGE DISPOSAL
6. DISHWASHER
7. RANGE
8. COOK TOP
9. OVEN
10. REFRIGERATOR SPACE.
11. PANTRY
12. PEDESTAL SINK
13. SHOWER (SIZE AS NOTED)
14. W/A
15. 42" X 60" TUB
16. 60" X 60" CORNER TUB
17. W/A
18. 32" X 60" TUB/SHOWER
19. LINEN (SHELVING PER BUILDER SPECS.)
20. WASHER SPACE
21. DRYER, VENT
22. OPTIONAL LAUNDRY SINK.
23. PROVIDE NON-COMBUSTIBLE PLATFORM ELEVATED 18" ABOVE GARAGE FLOOR FOR WATER HEATER.
24. 5 SHELVES
25. ROD AND SHELF PER BUILDER SPECS.
26. ATTIC ACCESS (22"X30" U.N.O.)
27. ATTIC ACCESS W/ STAIRS (25 1/2"x54 1/2").
28. 6'0"GYPSUM BOARD OPENING @ 8'-0" AT MAIN FLOOR & 11'-0" AT UPPER FLOOR U.N.O.
29. 6'0"GYPSUM BOARD ARCH @ 7'-2" TO 8'-0".
30. 6'0"GYPSUM BOARD LOW WALL 36" A.F.F. (U.N.O.) W/ HDF CAP.
31. SOFFIT, REFER TO EXTERIOR ELEVATIONS FOR HEIGHTS & ARCHITECTURAL DETAILS FOR SOFFIT.
32. PLANT SHELF, SEE EXTERIOR ELEVATIONS.
33. HALF WALL W/ WOOD CAP OR OPTIONAL LOW WALL WITH RAILING ABOVE.
34. PORCH RAIL, SEE ELEVATION.
35. 36"x36" CONCRETE STOOP.
36. 6x6 BEAM.
37. OPTIONAL UPPER CABINETS.
38. OPTIONAL CABINETS.
39. OPTIONAL COFFERED CEILING @ 8'-6" PER BUILDER SPEC.
40. LINE OF FRAMING ABOVE.
41. LINE OF FRAMING WALL BELOW.
42. 3/4 LOW WALL 42" A.F.F.
43. 2x6 LOW WALL 42" A.F.F.
44. ART NICHE
45. HORIZONTAL LAUNDRY CHUTE
46. LOW WALL 42"A.F.F.
47. GYPSUM BOARD ARCH @ 8'-0" TO 8'-6"
48. LOW WALL 32 1/2" A.F.F.

SQUARE FOOTAGES

Bld E

MAIN FLOOR	1715
UPPER FLOOR	2252
SUBTOTAL	3967
GARAGE	585
PORCH	249
DECK	120
TOTAL	4902
OPT 3-CAR GARAGE	+336
OPT SINGLE CAR GARAGE	+277
OPT EXTENDED DECK	+100
OPT SCREENED PORCH	+100

ISSUE DATE: 01/17/2014

REVISIONS

CORRECTION 01/31/2014
FLEX 2ND FLOOR UPDATE PER CLIENT 02/24/2014

5400 Trinity Road
Suite 107
Raleigh,
North Carolina 27607
919-322-2295 Phone

Meritage Homes

Meritage Homes

BSB DESIGN
www.bsbdesign.com
4004 Westown Parkway, Suite 200
West Des Moines, Iowa 50266
515.270.8600

JOB NO: 141008 PROJ MGR: JF
DRAWN BY: CHECKED: JF

MAIN FLOOR PLAN - E


PLAN 249 - 3971

A2.1E


Acknowledgement of Plans Submittal ONLY!

Date 6/27/16

Tom Shuck Date 6/27/16

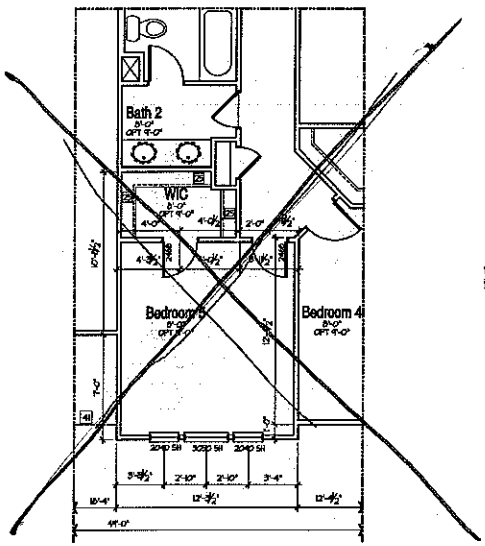

Opt. Bedroom 5
Upper Floor Plan - E

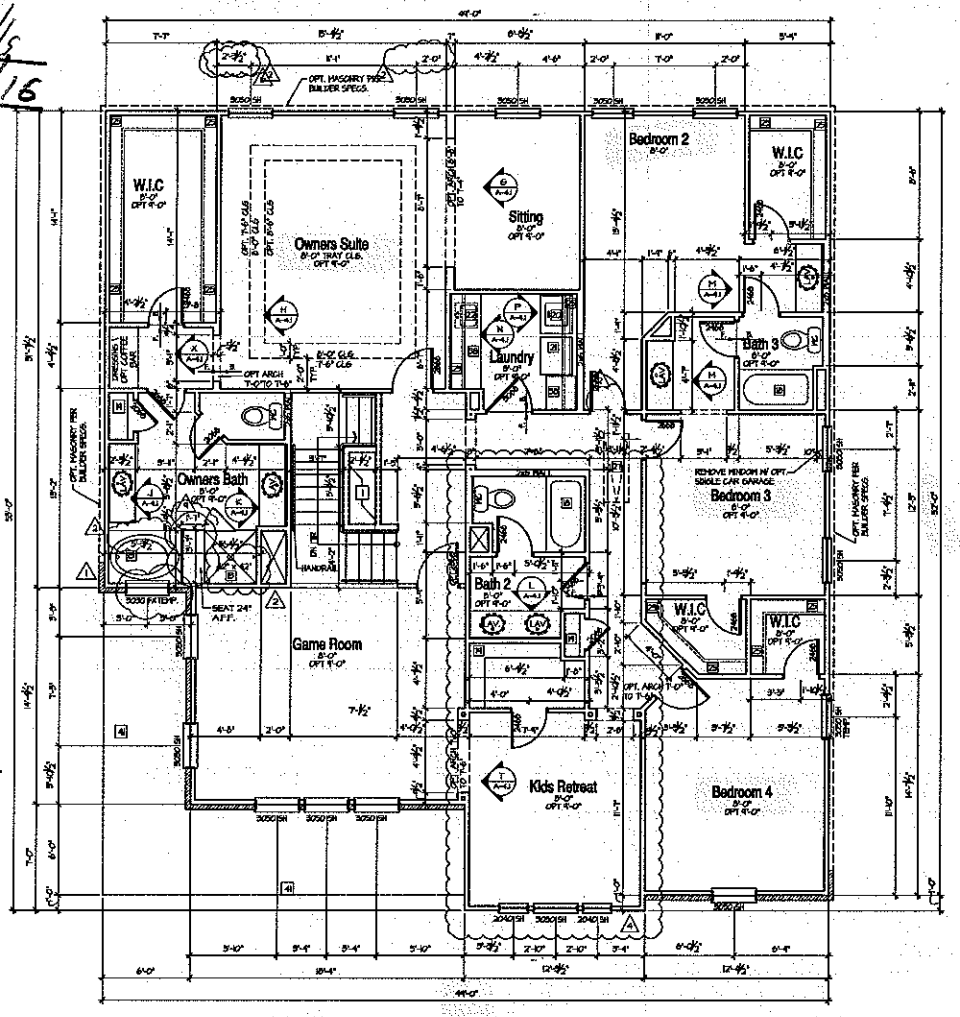

Upper Floor Plan - E

FLOOR PLAN NOTES:

(NOTE FLOOR)

THE FOLLOWING KEYNOTES REFERENCE THE SYMBOLS AS SHOWN ON PLANS.

1. IF RAILING / GUARDRAIL IS PROVIDED, ALL RAILING / GUARDRAIL BALUSTERS TO BE SPACED SUCH THAT A 4" SPHERE CANNOT PASS BETWEEN BALUSTERS. RAILINGS/HANDRAILS ARE TO BE AT A 34" MINIMUM TO 38" MAXIMUM HEIGHT A.F.F. FOR STAIRS AND 36" MINIMUM ON HORIZONTAL SURFACE GUARDS.
2. LINE OF OVERHEAD GARAGE DOOR IN OPEN POSITION.
3. SLOPE GARAGE FLOOR 1/8" PER FOOT TOWARD OVERHEAD GARAGE DOOR OPENING.
4. FIREPLACE AS SPECIFIED BY BUILDER. INSTALL PER MANUFACTURERS SPECIFICATIONS. ALL FACTORY BUILT FIREPLACES SHALL COMPLY WITH LOCAL CODES
5. SINK W/ GARBAGE DISPOSAL
6. DISHWASHER
7. RANGE
8. COOK TOP
9. OVEN
10. REFRIGERATOR SPACE.
11. PANTRY
12. MEDICINE SINK
13. SHOWER (SIZE AS NOTED)
14. N/A
15. 42" X 60" TUB
16. 60" X 60" CORNER TUB
17. N/A
18. 30" X 60" RECESSED
19. LINEN SHELVING PER BUILDER SPECS.)
20. WASHER SPACE
21. DRYER VENT
22. OPTIONAL LAUNDRY SINK.
23. PROVIDE NON-COMBUSTIBLE PLATFORM ELEVATED 18" ABOVE GARAGE FLOOR FOR WATER HEATER.
24. 5 SHELVES
25. ROD AND SHELF PER BUILDER SPECS.
26. ATTIC ACCESS DOOR (R-30 ONLY)
27. ATTIC ACCESS W/ STAIRS (25 1/2"x54 1/2").
28. GYPSUM BOARD OPENING @ 8'-0" AT MAIN FLOOR x 7'-0" AT UPPER FLOOR U.N.O.
29. GYPSUM BOARD ARCH @ 7'-2" TO 8'-0".
30. GYPSUM BOARD LOW WALL 36" A.F.F. (U.N.O.) W/ NOF CAP.
31. SOFFIT, REFER TO EXTERIOR ELEVATIONS FOR HEIGHTS & ARCHITECTURAL DETAILS FOR FINISH.
32. FLAT SHELF, SEE EXTERIOR ELEVATIONS.
33. HALF WALL W/ WOOD CAP OR OPTIONAL LOW WALL WITH RAILING ABOVE.
34. PORCH RAIL, SEE ELEVATION.
35. 36"x36" CONCRETE STOOP.
36. 6x12 BEAM.
37. OPTIONAL UPPER CABINETS.
38. OPTIONAL CABINETS.
39. OPTIONAL COFFERED CEILING @ 8'-0" PER BUILDER SPEC.
40. LINE OF FRAMING ABOVE.
41. LINE OF FRAMING WALL BELOW.
42. 2X4 LOW WALL 42" A.F.F.
43. 2X6 LOW WALL 42" A.F.F.
44. ART NICHE
45. HORIZONTAL LAUNDRY CHUTE
46. LOW WALL 42"A.F.F.
47. GYPSUM BOARD ARCH @ 8'-0" TO 8'-6"
48. LOW WALL 32½" A.F.F.

TYPICAL CONSTRUCTION ASSEMBLIES:

A. TYPICAL ROOF CONSTRUCTION: ASPHALT ROOF SHINGLES

B. TONGUE-FROVE FLOOR CONSTRUCTION: FINISH FLOORING ON 3/4" TONGUE & GROOVE FLOOR SHEATHING ON FLOOR TRUSSES OR FLOOR JOISTS AS NOTED ON STRUCTURAL DRAWINGS.

C. SLAB ON GRADE FLOOR CONSTRUCTION: 4" CONCRETE SLAB, EXCEPT AS SPECIFIED BY SOIL REPORT, AND STRUCTURAL ENGINEER. INCLUDE VAPOR BARRIER PER SECTION N, G, & a.

D. WINDOWS:
- A. ALL WINDOWS SHALL COMPLY WITH MINIMUM STANDARDS OUTLINED IN APPLICABLE RES. CHECKS.
- B. WINDOW SUPPLIER TO VERIFY AT LEAST ONE WINDOW IN ALL BEDROOMS TO HAVE A CLEAR EGRESS OPENING OF 5.7 SQ. FT. WITH MIN. DIMENSION OF 24" IN HEIGHT AND 20" IN WIDTH. SILL HEIGHT NOT GREATER THAN 44" ABOVE FLOOR.
- C. TYPICAL WINDOW HEAD HEIGHT: 7'-0" A.F.F @ 8'-1 1/8" PLATE HEIGHT (U.N.O.) 6'-0" A.F.F @ 9'-1 1/8" PLATE HEIGHT (U.N.O.)

E. ELECTRICAL: ALL ELECTRICAL AND MECHANICAL EQUIPMENT & METERS ARE SUBJECT TO RELOCATION DUE TO FIELD CONDITIONS. CONTRACTOR TO VERIFY.

F. VENTS: PROVIDE BACK DRAFT DAMPERS @ DRYER VENT, HOOD VENT, & EXHAUST FANS.

G. STUCCO SIDING: INSTALL PER LOCAL CODE.

H. DIMENSIONS ARE TO THE FACE OF STUD, U.N.O.

I. ALL EXTERIOR DIMENSIONS ARE TO FACE OF STUDS UNLESS OTHERWISE NOTED.

J. ALL ANGLED PARTITIONS ARE 45 DEGREES UNLESS OTHERWISE NOTED.

K. BRICK SIDING: INSTALL PER LOCAL CODE.

ALL EXTERIOR HOUSE WALLS MAY BE OPTIONAL 2X6 STUD WALLS - SEE STRUCTURAL PLANS FOR DETAILS.

ISSUE DATE: 01/17/2014

REVISIONS
CORRECTION PER BSK 2/27/2014
BROKER PHASE PER CLIENT 6/06

5400 Trinity Road
Suite 107
Raleigh,
North Carolina 27607
919-322-2285 Phone

Meritage Homes

Meritage Homes

BSB DESIGN
www.bsbdesign.com
4001 Weston Parkway, Suite 208
West Des Moines, Iowa 50266
515 273 3000

JOB NO: 5113.03 PROJ MGR: JF
DRAWN BY: CHECKED: JF

UPPER FLOOR PLAN - E

PLAN 249 - 3971

A2.2E