LINE SCHEDULE

LINE NUMBER	COLOR	FIELD ELEVATION	LENGTH (FT)
1	RED	2.6	56
2	YELLOW	3.1	66
3	RED	4.1	94
4	BLUE	4.7	50
5	PINK	5.7	105
6	RED	7.0	93
7	YELLOW	8.8	117
8	BLUE	10.4	101
9	PINK	11.9	58
10	ORANGE	14.1	45

LOT 64 BELLS CROSSING SUBDIVISION


4-BEDROOM PRESSURE MANIFOLD SYSTEM
LINES 4-7 TOTAL 450 LINEAR FEET
EZFLOW OR CHAMBER
LTAR 0.275
25% REDUCTION

4-BEDROOM LPP FED PANEL BLOCK REPAIR
LINES 1-3 & 8-9 TOTAL 319 LINEAR FEET
LTAR 0.275
50% REDUCTION

FOR GENERAL USE NOT A SURVEY
PRELIMINARY NOT FOR CONSTRUCTION

HAS 4/60"
NEEDS 9"
NEW 7/30/13

SYSTEM LINE
REPAIR LINE

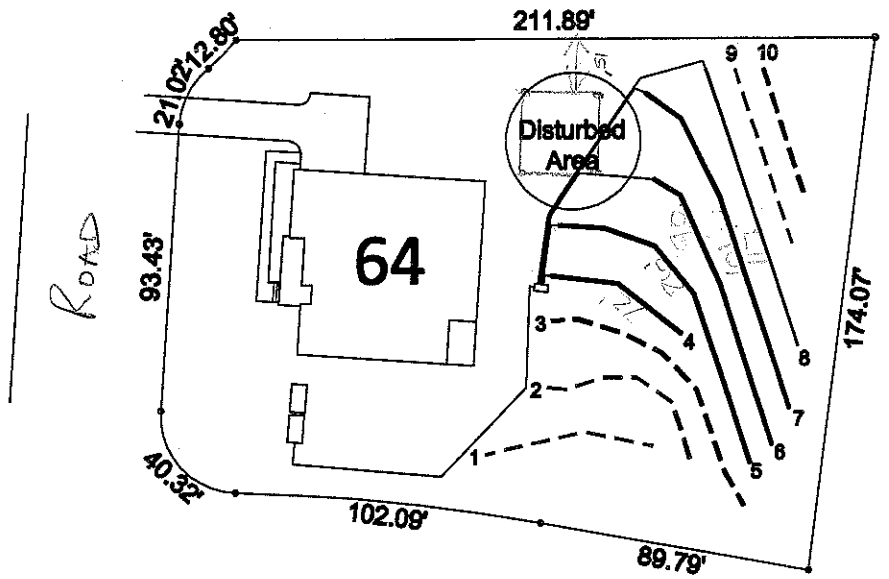

REMOVE 2-3 CK FROM 3RD LINE. REROUT 3" PIPE TO GET 5' SETBACK

0 30 60
SCALE:
1" = 60 ft.

Bateman Civil Survey Company
Engineers • Surveyors • Planners
209 N. Main Street, Holly Springs, NC 27540 Ph: 919.577.1080 Fax: 919.577.1081
www.batemancivilsurvey.com info@batemancivilsurvey.com
NCBELS Firm No. C-0278

MeritageHomes

LOT 64
BELLS CROSSING SUBDIVISION
MOORESVILLE, NC
IREDELL COUNTY

DATE: 07/09/13 DRAWN BY: TMB CHECKED BY: TMB