LINE SCHEDULE

LINE NUMBER	COLOR	FIELD ELEVATION	LENGTH (FT)
1	RED	0.6	20
2	BLUE	1.2	30
3	YELLOW	4.3	60
4	ORANGE	5.0	105
5	PINK	6.8	102
6	YELLOW	8.4	100
7	WHITE	9.7	100
8	ORANGE	10.8	87
9	PINK	12.2	77
10	BLUE	13.4	65
11	RED	14.6	55
12	YELLOW	16.2	56
13	ORANGE	17.9	85
14	PINK	19.6	85
15	BLUE	21.9	65
16	WHITE	24.4	80

50' + 554' + 604'

I

R


LOT 62 BELLS CROSSING SUBDIVISION

5-BEDROOM INNOVATIVE GRAVITY SYSTEM
SERIAL DISTRIBUTION WITH DROP BOXES
LINES 1-8 TOTAL ~~660~~ LINEAR FEET
EZFLOW OR CHAMBER 604'
LTAR 0.25
25% REDUCTION

5-BEDROOM LPP FED PANEL BLOCK REPAIR
LINES 9-16 TOTAL 568 LINEAR FEET
LTAR 0.25
50% REDUCTION

FOR GENERAL USE NOT A SURVEY
PRELIMINARY NOT FOR CONSTRUCTION

SOIL ANALYSIS AND APPLICATION RATES PROVIDED BY
CENTRAL CAROLINA SOIL CONSULTING

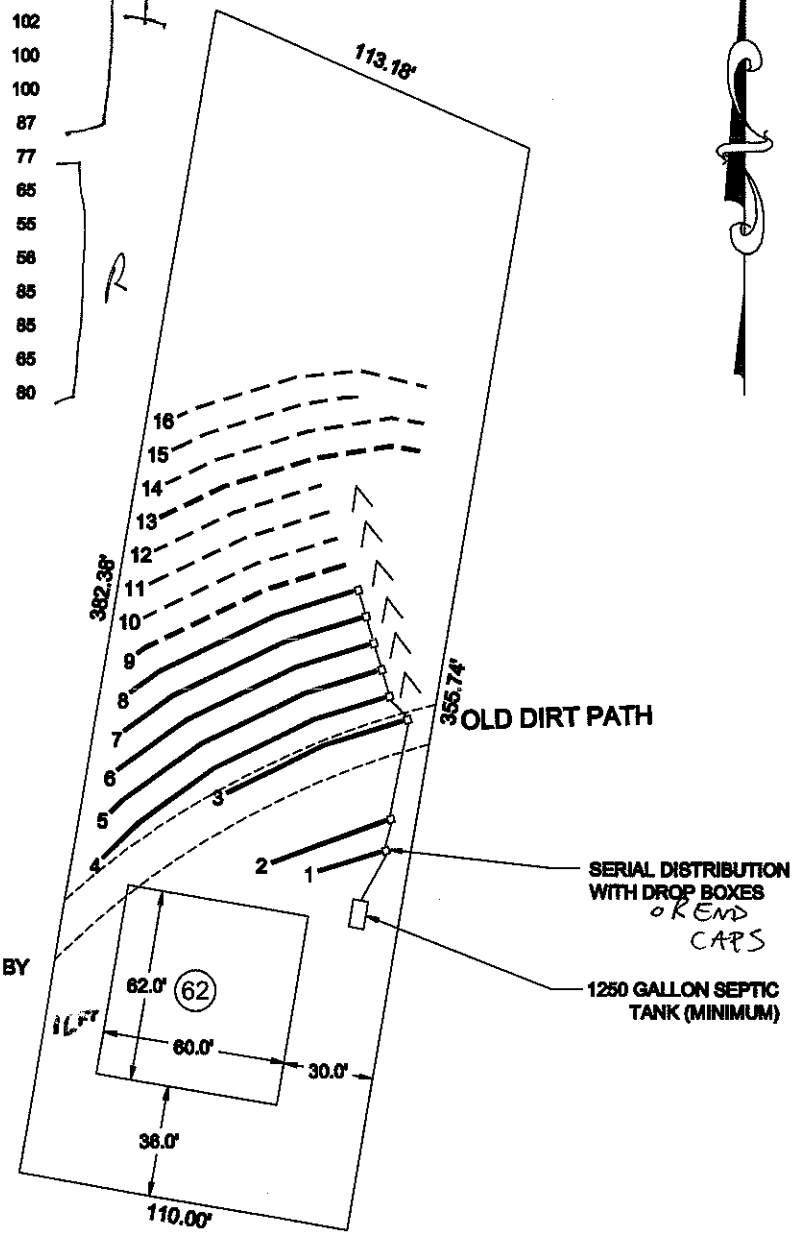

0 30 60

SCALE:
1" = 60 ft.

Bateman Civil Survey Company
Engineers • Surveyors • Planners
200 N. Main Street, Holly Springs, NC 27540 Ph: 919.577.1080 Fax: 919.577.1081
www.batemancivilsurvey.com info@batemancivilsurvey.com
NCBELS Firm No. C-0278

Meritage Homes

LOT 62
BELLS CROSSING SUBDIVISION
MOORESVILLE, NC
IREDELL COUNTY

DATE: 10/30/12 DRAWN BY: TMB CHECKED BY: TMB