
Acknowledgement Of Plans Submittal ONLY! Date 2-16-16

DATE RECEIVED FEB 17 2016

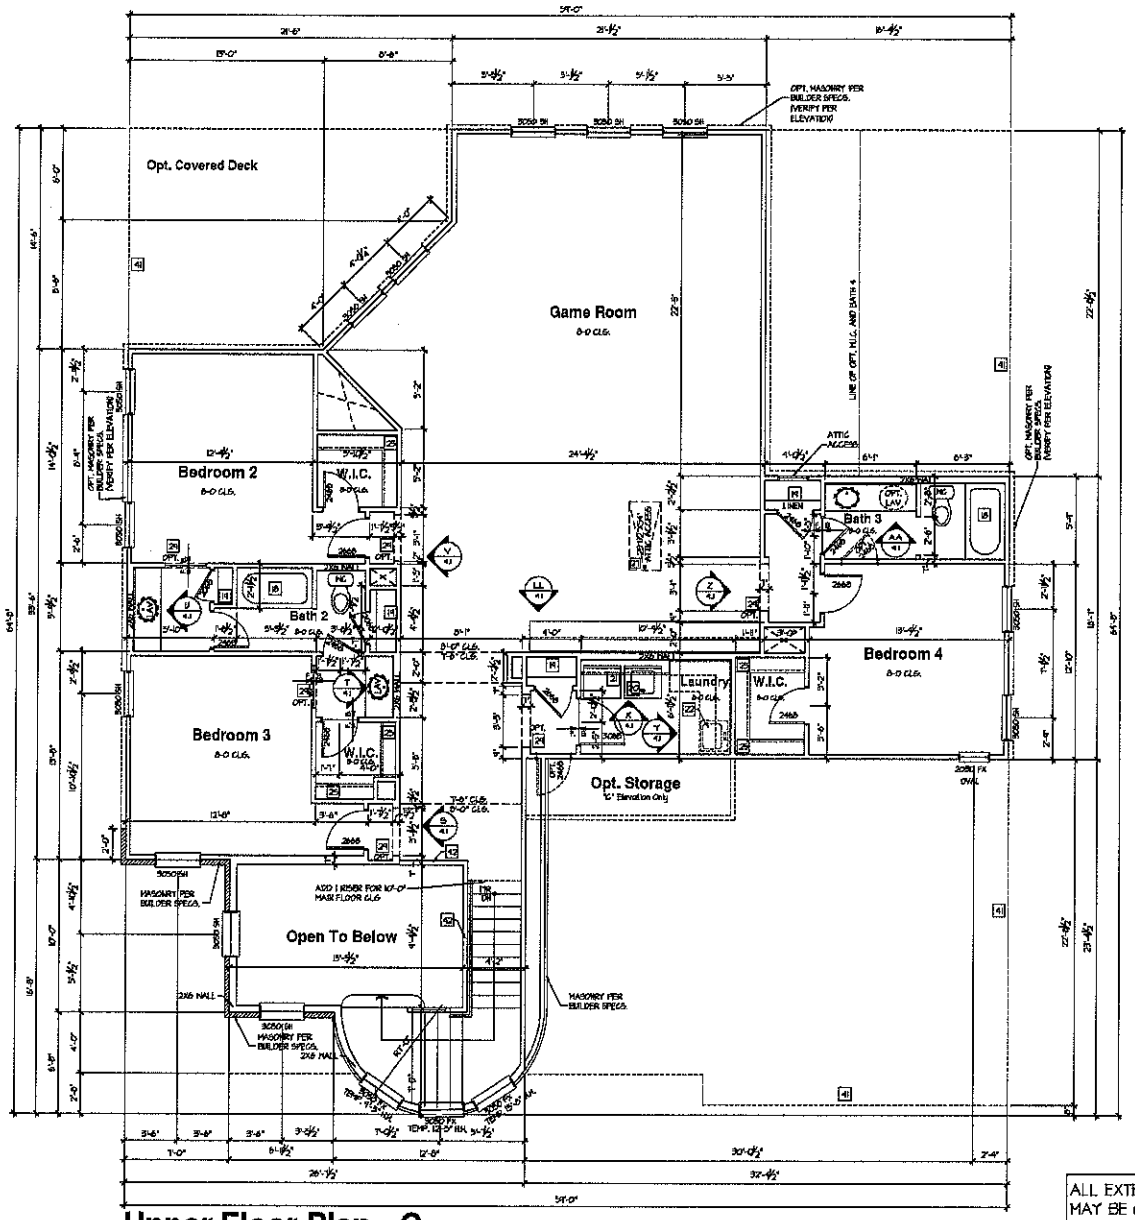

Upper Floor Plan - C

0 2' 4' 8'

ALL EXTERIOR HOUSE WALLS MAY BE OPTIONAL 2X6 STUD WALLS - SEE STRUCTURAL PLANS FOR DETAILS.

FLOOR PLAN NOTES:

[NOTE_FLOOR]

9 THE FOLLOWING KEYNOTES REFERENCE THE SYMBOLS AS SHOWN ON PLANS:

1. IF RAILING / GUARDRAIL IS PROVIDED, ALL RAILING / GUARDRAIL BALUSTERS TO BE SPACED SUCH THAT A 4" SPHERE CANNOT PASS BETWEEN BALUSTERS. RAILS&HANDRAILS ARE TO BE AT A 34" MINIMUM TO 38" MAXIMUM HEIGHT A.F.F. FOR STAIRS AND 36" MINIMUM ON HORIZONTAL SURFACE BOARDS.
2. LINE OF OVERHEAD GARAGE DOOR IN OPEN POSITION.
3. SLOPE GARAGE FLOOR 1/8" PER FOOT TOWARD OVERHEAD GARAGE DOOR OPENING.
4. FIREPLACE, AS SPECIFIED BY BUILDER. INSTALL PER MANUFACTURERS SPECIFICATIONS. ALL FACTORY BUILT FIREPLACES SHALL COMPLY WITH LOCAL CODES.
5. SINK W/ GARBAGE DISPOSAL
6. DISHWASHER
7. RANGE
8. COOK TOP
9. OVEN
10. REFRIGERATOR SPACE.
11. PANTRY
12. PEDESTAL SINK
13. 42" X 42" SHOWER
14. ~~42" X 60" SHOWER~~
15. 42" X 60" TUB 2'-0" TO TOP OF DECKING
16. ~~60" X 60" SHOWER~~
17. 30" X 60" SHOWER
18. 32" X 60" SHOWER
19. LINEN SHELVING PER BUILDER SPECS.)
20. WASHER SPACE
21. DRYER, VENT
22. OPTIONAL LAUNDRY SINK.
23. PROVIDE NON-COMBUSTIBLE PLATFORM ELEVATED 8" ABOVE GARAGE FLOOR FOR WATER HEATER
24. 5 SHELVES PER BUILDER SPECS.
25. ~~RPR AND SHELVES PER BUILDER SPECS.~~
26. ATTIC ACCESS (22 1/2"x32" (U.O.)
27. ATTIC ACCESS W/ STAIRS (25 1/2"x54 1/2").
28. ~~GYPSUM BOARD SOFFIT @ 8'-0" AT MAIN FLOOR & 7'-0" AT UPPER FLOOR (U.O.)~~
29. GYPSUM BOARD ARCH @ 11'-2" TO 8'-0".
30. GYPSUM BOARD LOW WALL @ 36" A.F.F. (U.O.) W/ MDF CAP.
31. SOFFIT, REFER TO EXTERIOR ELEVATIONS FOR HEIGHTS / ARCHITECTURAL DETAILS FOR FINISH.
32. PLANT SHELF, SEE EXTERIOR ELEVATIONS.
33. HALF WALL W/ WOOD CAP OR OPTIONAL LOW WALL WITH RAILING ABOVE.
34. PORCH RAIL, SEE ELEVATION.
35. 36"x36" CONCRETE STOOP.
36. 6x8 BEAM.
37. OPTIONAL UPPER CABINETS.
38. OPTIONAL CABINETS.
39. OPTIONAL COFFERED CEILING @ 9'-0" PER BUILDER SPEC.
40. LINE OF FRAMING ABOVE.
41. LINE OF FRAMING WALL BELOW.
42. 2X8 LOW WALL 42" A.F.F.
43. 2X8 LOW WALL 42" A.F.F.
44. ART NICHE
45. HORIZONTAL LAUNDRY CHUTE
46. LOW WALL 24" A.F.F.
47. GYPSUM BOARD ARCH @ 8'-0" TO 8'-8"
48. LOW WALL 92" A.F.F.
49. NO HARD LATCH OR LOCKING KNOB

TYPICAL CONSTRUCTION ASSEMBLIES:

A. TYPICAL ROOF CONSTRUCTION: ASPHALT ROOF SHINGLES

B. TYPICAL FRAME FLOOR CONSTRUCTION: T-FINISH FLOORING ON 3/4" TONGUE & GROOVE FLOOR SHEATHING ON FLOOR TRUSSES OR FLOOR JOISTS AS NOTED ON STRUCTURAL DRAWINGS.

C. SLAB ON GRADE FLOOR CONSTRUCTION: 4" CONCRETE SLAB, EXCEPT AS SPECIFIED BY SOIL REPORT AND STRUCTURAL ENGINEER. INCLUDE VAPOR BARRIER PER SECTION N, G, 3, a.

D. WINDOWS:
- A. ALL WINDOWS SHALL COMPLY WITH NAWSH STANDARDS OUTLINED IN APPLICABLE IRC CHOICE.
- B. WINDOW SUPPLIER TO VERIFY AT LEAST ONE WINDOW IN ALL BEDROOMS TO HAVE A CLEAR EGRESS OPENING OF 5.7 SQ. FT. WITH MIN. DIMENSION OF 24" IN HEIGHT AND 20" IN WIDTH. SILL HEIGHT NOT GREATER THAN 44" ABOVE FLOOR.
- C. TYPICAL WINDOW HEAD HEIGHT: 7'-0" A.F.F. @ 8'-1 1/8" PLATE HEIGHT (U.O.) 8'-0" A.F.F. @ 9'-1 1/8" PLATE HEIGHT (U.O.)

E. ELECTRICAL: ALL ELECTRICAL AND MECHANICAL EQUIPMENT & METERS ARE SUBJECT TO RELOCATION DUE TO FIELD CONDITIONS; CONTRACTOR TO VERIFY.

F. HVAC: PROVIDE BACK DRAFT DAMPERS @ DRYER VENT, HOOD VENT, & EXHAUST FANS.

G. STONE SOLDIER: INSTALL PER LOCAL CODE.

H. DIMENSIONS ARE TO THE FACE OF STUD, U.N.O.

I. ALL EXTERIOR DIMENSIONS ARE TO FACE OF STUDS UNLESS OTHERWISE NOTED.

M. ALL ANGLED PARTITIONS ARE 45 DEGREES UNLESS OTHERWISE NOTED.

N. BRICK SOLDIER: INSTALL PER LOCAL CODE.

ISSUE DATE: 01/17/2014
REVISIONS

5400 Trinity Road
Suite 107
Raleigh,
North Carolina 27607
919-322-2295 Phone

Meritage Homes

Meritage Homes


BSB DESIGN
www.bsbdesign.com
1001 Wilshire Parkway, Suite 240
West Des Moines, Iowa 50266
515.973.3399

JOB NO. 15-1510 SPEC HOME: N
DRAWN: JF CHECKED: JF

UPPER FLOOR PLAN - C

Plan 4551
A2.2C

Acknowledgement Of
Plans Submittal ONLY!
Date 2-16-15
APPROVED FEB 17 2015
Date

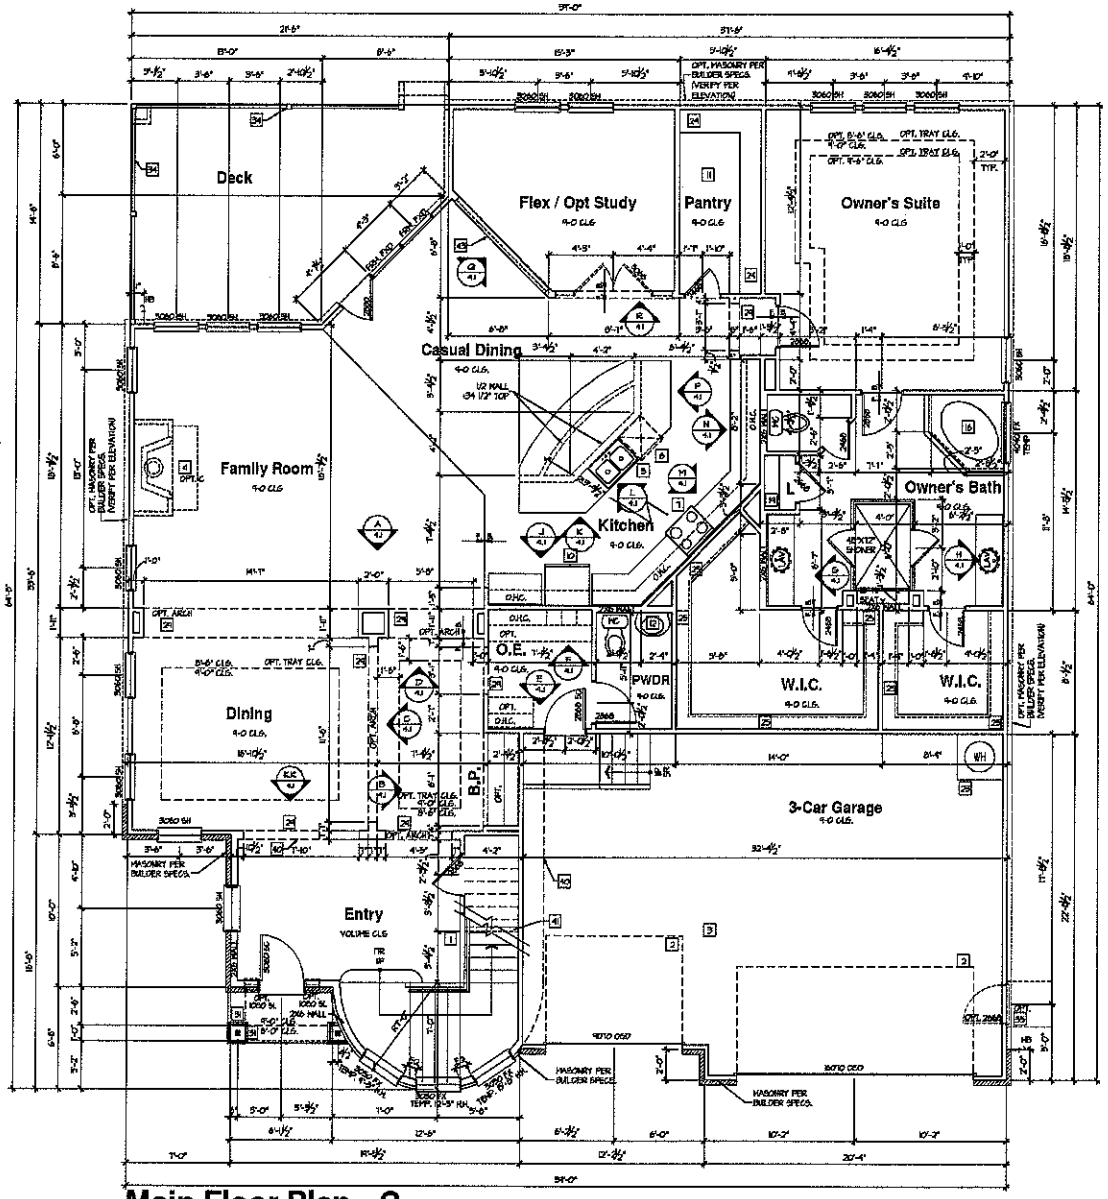

Main Floor Plan - C

0 3' 4' 8'

FLOOR PLAN NOTES:

[NOTE_FLOOR]

1 THE FOLLOWING KEYNOTES REFERENCE THE SYMBOLS AS SHOWN ON PLANS:

1. IF RAILING / GUARDRAIL IS PROVIDED, ALL RAILING / BALUSTRADE BALUSTERS TO BE SPACED SUCH THAT A 4" SPHERE CANNOT PASS BETWEEN BALUSTERS. RAILING/HANDRAILS ARE TO BE AT A 34" MINIMUM TO 38" MAXIMUM HEIGHT A.F.F. FOR STAIRS AND 36" MINIMUM OR HORIZONTAL SURFACE GUARDS.
2. LINE OF OVERHEAD GARAGE DOOR IN OPEN POSITION.
3. SLOPE GARAGE FLOOR 1/8" PER FOOT TOWARD OVERHEAD GARAGE DOOR OPENING.
4. FIREPLACE, AS SPECIFIED BY BUILDER. INSTALL PER MANUFACTURERS SPECIFICATIONS. ALL FACTORY BUILT FIREPLACES SHALL COMPLY WITH LOCAL CODES.
5. SINK W/ GARBAGE DISPOSAL
6. DISHWASHER
7. RANGE
8. COOK TOP
9. OVEN
10. REFRIGERATOR SPACE.
11. PANTRY
12. PEDESTAL SINK
13. 42" X 42" SHOWER
14. 60" X 42" SHOWER
15. 42" X 60" TUB 2" TO TOP OF DECKING
16. 60"X 30"X 60"SHOWER W/BENCH
17. 30" X 60" VANISHER
18. 32" X 60" VANISHER
19. LINEN SHELVING PER BUILDER SPECS.)
20. WASHER SPACE
21. DRYER VENT
22. OPTIONAL LAUNDRY SINK.
23. PROVIDE NON-COMBUSTIBLE PLATFORM ELEVATED 8" ABOVE GARAGE FLOOR FOR WATER HEATER.
24. 5 SHELVES PER BUILDER SPECS.
25. 60" LINEN CLOSET W/ 5 SHELVES
26. ATTIC ACCESS (22 1/2"x30" U.N.O.)
27. ATTIC ACCESS W/ STAIRS (25 1/2"x54 1/2")
28. GYPSUM BOARD SOFFITS @ 8'-0" AT MAIN FLOOR & 7'-0" AT UPPER FLOOR U.N.O.
29. GYPSUM BOARD ARCH @ 7'-3" TO 8'-0".
30. GYPSUM BOARD LOW WALL, 36" A.F.F. (U.N.O.) W/ CAP.
31. SOFFIT, REFER TO EXTERIOR ELEVATIONS FOR HEIGHTS & ARCHITECTURAL DETAILS FOR FINISH.
32. PLANT SHELF, SEE EXTERIOR ELEVATIONS.
33. HALF WALL W/ WOOD CAP OR OPTIONAL LOW WALL WITH RAILING ABOVE.
34. PORCH RAIL, SEE ELEVATION.
35. 36"x36" CONCRETE STOOP.
36. 6x6 BEAM.
37. OPTIONAL UPPER CABINETS.
38. OPTIONAL CABINETS.
39. OPTIONAL COFFERED CEILING @ 8'-6" PER BUILDER SPEC.
40. LINE OF FRAMING ABOVE.
41. LINE OF FRAMING WALL BELOW.
42. 2x6 LOW WALL 42" A.F.F.
43. 2x8 LOW WALL 42" A.F.F.
44. ART NICHE
45. HORIZONTAL LAUNDRY CHUTE
46. LOW WALL 42" A.F.F.
47. GYPSUM BOARD ARCH @ 8'-0" TO 8'-6"
48. LOW WALL 32" A.F.F.
49. NO HARD LATCH OR LOCKING KNOB

TYPICAL CONSTRUCTION ASSEMBLIES:

A. TYPICAL ROOF CONSTRUCTION:
ASPHALT ROOF SHINGLES

B. TYPICAL FRAME FLOOR CONSTRUCTION:
FINISH FLOORING ON 3/4" TONGUE & GROOVE FLOOR SHEATHING ON FLOOR TRUSSES OR FLOOR JOISTS AS NOTED ON STRUCTURAL DRAWINGS.

C. SLAB OR GRADE FLOOR CONSTRUCTION:
4" CONCRETE SLAB, EXCEPT AS SPECIFIED BY SOIL REPORT, AND STRUCTURAL ENGINEER. INCLUDE VAPOR BARRIER PER SECTION IV, C, 5, a.

D. WINDOWS:
A. ALL WINDOWS SHALL COMPLY WITH MINIMUM STANDARDS OUTLINED IN APPLICABLE RES. CODES.
B. WINDOW SUPPLIER TO VERIFY AT LEAST ONE WINDOW IN ALL BEDROOMS TO HAVE A CLEAR EGRESS OPENING OF 5.7 SQ. FT. WITH MIN. DIMENSION OF 24" IN HEIGHT AND 20" IN WIDTH SILL HEIGHT NOT GREATER THAN 44" ABOVE FLOOR.
C. TYPICAL WINDOW HEAD HEIGHT:
7'-0" A.F.F. @ 8'-1 1/8" PLATE HEIGHT (U.N.O.)
8'-0" A.F.F. @ 9'-1 1/8" PLATE HEIGHT (U.N.O.)

E. ELECTRICAL:
ALL ELECTRICAL AND MECHANICAL EQUIPMENT & HEIGHTS ARE SUBJECT TO RELOCATION DUE TO FIELD CONDITIONS. CONTRACTOR TO VERIFY.

F. HVAC:
PROVIDE BACK DRAFT DAMPERS @ DRYER VENT, HOOD VENT, & EXHAUST FANS.

G. STONE SOLDIER:
INSTALL PER LOCAL CODE.

H. DIMENSIONS ARE TO THE FACE OF STUD, U.N.O.

I. ALL EXTERIOR DIMENSIONS ARE TO FACE OF STUDS UNLESS OTHERWISE NOTED.

M. ALL ANGLED PARTITIONS ARE 45 DEGREES UNLESS OTHERWISE NOTED.

N. BRICK LEDGE:
INSTALL PER LOCAL CODE.

SQUARE FOOTAGES	
	0
MAIN FLOOR	2804
UPPER FLOOR	1761
SUBTOTAL	4565
GARAGE	720
PORCH	30
PATIO	216
OPT BALCONY	216
TOTAL	5663

ALL EXTERIOR HOUSE WALLS MAY BE OPTIONAL 2X6 STUD WALLS - SEE STRUCTURAL PLANS FOR DETAILS.

ISSUE DATE: 01/17/2014
REVISIONS

5400 Tinsley Road
Suite 107
Raleigh,
North Carolina 27607
919-322-2205 Phone

Meritage Homes

Meritage Homes


BSB DESIGN
www.bsbdesign.com
6031 Westown Parkway, Suite 240
West Des Moines, Iowa 50266
515 273 0929

DRAWN BY: BMW PROJECT #:
CHECKED BY: CHECKED #:
MAIN FLOOR PLAN - C

Plan 4551
A2.1C

Acknowledgement Of Plans Submittal ONLY!
Date 2-16-15

APPROVED FEB 17 2015
Date

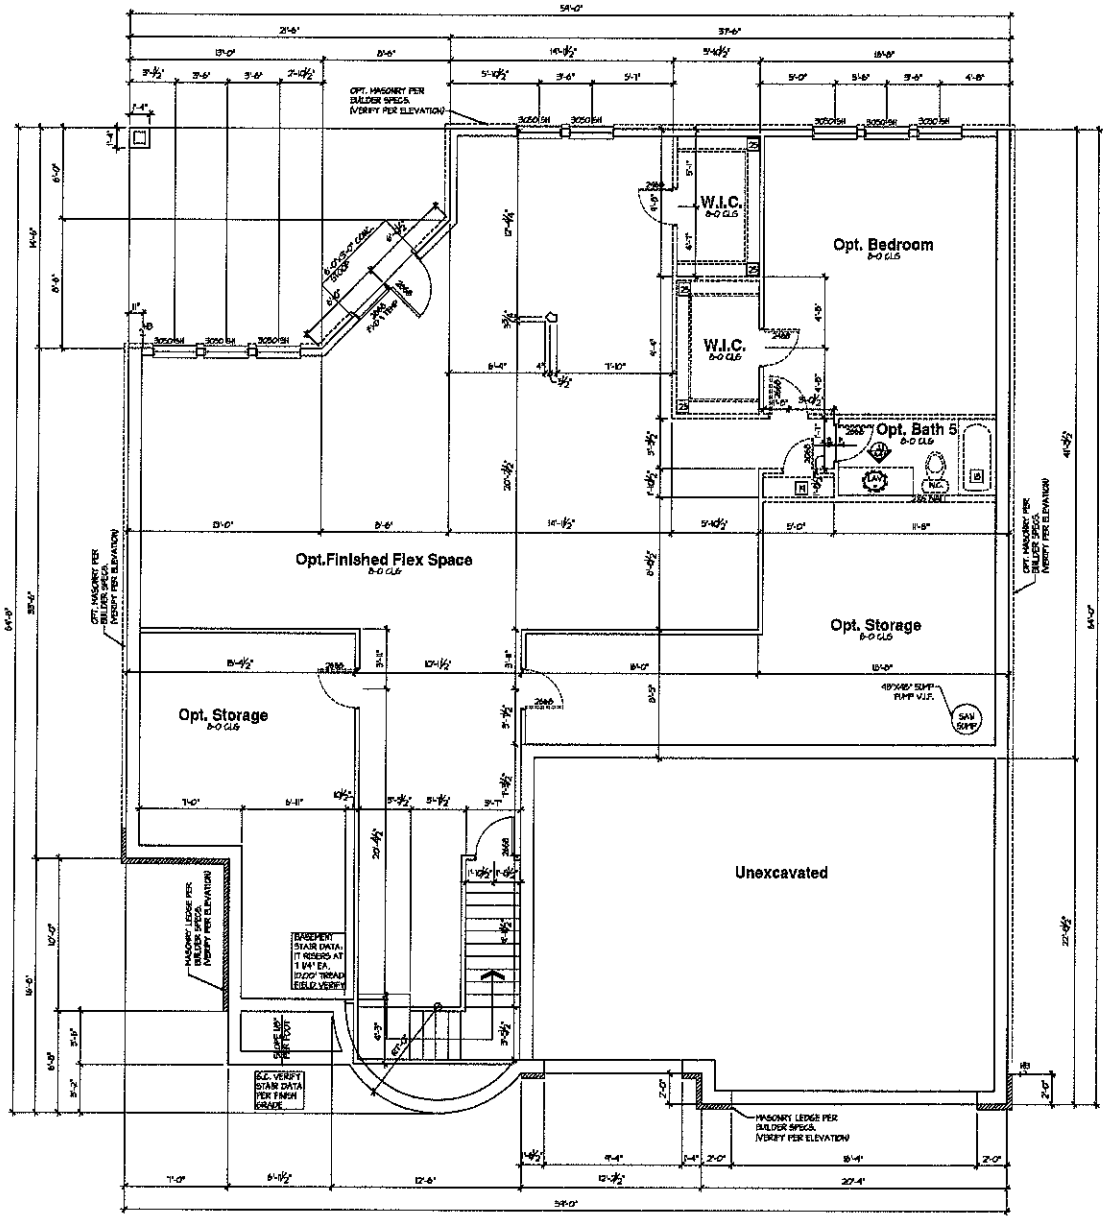

Opt. Walkout Floor Plan - C

0 2' 4' 8'

FOUNDATION NOTES

NOTE: FOUNDATION

1. STRUCTURAL FOUNDATION PLANS SHALL BE BY OTHERS. SEE STRUCTURAL FOUNDATION AND FRAMING PLANS FOR STEEL, COLUMN, STEEL BEAM, WOOD POST SIZES, AND DIMENSIONS.
2. DROP TOP OF FOUNDATION AT GARAGE DOOR.
3. EMERGENCY EGRESS: WINDOWS SHALL COMPLY WITH GOVERNING FIRE & BUILDING CODES. MAXIMUM SILL HEIGHT OF EGRESS WINDOW SHALL NOT BE MORE THAN 44" A.F.F.
4. WINDOW WELL AS SPECIFIED BY BUILDER. CLEAR DIMENSIONS OF WELL SHALL BE 36"x36" MINIMUM W/ LADDER AT EGRESS WINDOWS.
5. DROP TOP OF FOUNDATION AT PORCH STOOP.
6. LINE OF FRAMING ABOVE.
7. LINE OF STOOP ABOVE.
8. HANDRAIL
9. SUMP PIT LOCATION AS REQUIRED BY SOILS ENGINEER.
10. 30"x30" CRAWL SPACE ACCESS PANEL, AS REQUIRED BY CODE.
11. APPLY 10 MIL POLYVINYL GROUND COVER OVER FINISH GRADE OF CRAWL SPACE, OR PER BUILDERS SPECIFICATIONS. INSULATE PER RES. CHECK REQUIREMENTS.
12. MECHANICAL CRAWL SPACE VENTILATION PER LOCAL CODE.
13. OPTIONAL 5 WIRE SHELF LINEN
14. OPTIONAL WIRE SHELVING PER BUILDER SPEC.
15. OPTIONAL VANITY
16. FLOOR DRAIN
17. BEAM POCKET
18. LINE OF SLAB ABOVE.
19. PROVIDE MIN. 1/2" GYPSUM BOARD ON WALLS UNDER STAIR SURFACE, AND ON SOFFITS OF ENCLOSED ACCESSIBLE SPACE UNDER STAIRS.
20. STANDARD BEARING WALL

TYPICAL CONSTRUCTION ASSEMBLIES:

A. TYPICAL ROOF CONSTRUCTION:
ASPHALT ROOF SHINGLES

B. TYPICAL FRAME FLOOR CONSTRUCTION:
FINISH FLOORING ON 3/4" TONGUE & GROOVE FLOOR SHEATHING ON FLOOR TRUSSES OR FLOOR JOISTS AS NOTED ON STRUCTURAL DRAWINGS.

C. SLAB ON GRADE FLOOR CONSTRUCTION:
4" CONCRETE SLAB, EXCEPT AS SPECIFIED BY SOIL REPORT, AND STRUCTURAL DRAWINGS. INCLUDE VAPOR BARRIER PER SECTION IV, C, 3, a.

D. WINDOWS:
A. ALL WINDOWS SHALL COMPLY WITH MINIMUM STANDARDS OUTLINED IN APPLICABLE RES. CHECKS.
B. WINDOW SUPPLIER TO VERIFY AT LEAST ONE WINDOW IN ALL BEDROOMS TO HAVE A CLEAR EGRESS OPENING OF 5.7 SQ. FT. WITH MIN. DIMENSION OF 24" IN HEIGHT AND 20" IN WIDTH. SILL HEIGHT NOT GREATER THAN 44" ABOVE FLOOR.
C. TYPICAL WINDOW HEAD HEIGHT:
7'-0" A.F.F @ 9'-1 1/8" PLATE HEIGHT (SOLD)
8'-0" A.F.F @ 10'-1 1/8" PLATE HEIGHT (SOLD)

E. ELECTRICAL:
ALL ELECTRICAL AND MECHANICAL EQUIPMENT & METERS ARE SUBJECT TO RELOCATION DUE TO FIELD CONDITIONS; CONTRACTOR TO VERIFY.

F. HVAC:
PROVIDE BACK DRAFT DAMPERS @ DRYER VENT, HOOD VENT, & EXHAUST FANS.

G. SMOKE DETECTORS:
INSTALL PER LOCAL CODE.

H. DIMENSIONS ARE TO THE FACE OF STUD, U.N.O.

I. ALL EXTERIOR DIMENSIONS ARE TO FACE OF STUDS UNLESS OTHERWISE NOTED.

J. ALL ANGLED PARTITIONS ARE 45 DEGREES UNLESS OTHERWISE NOTED.

K. SMOKE SIGNAL:
INSTALL PER LOCAL CODE.

ISSUE DATE: 01/17/2014
REVISIONS

5400 Tinsley Road
Suite 107
Raleigh,
North Carolina 27607
919.322.2285 Phone

Meritage Homes

Meritage Homes

BSB DESIGN
www.bsbdesign.com
2001 Western Parkway, Suite 240
West Des Moines, Iowa 50266
515.273.3929

DRAWN BY: BWN | REVIEWED BY:
CHECKED BY:
BASEMENT PLAN - C

Plan 4551
A0.1C