LINE SCHEDULE

LINE NUMBER	COLOR	FIELD ELEVATION	LENGTH (FT)	
1	ORANGE	2.6	28	
2	RED	3.2	41	50
3	BLUE	3.6	62	
4	PINK	4.7	77	
5	YELLOW	5.7	100	100
6	ORANGE	6.8	59	
7	BLUE	9.1	148	149'
8	RED	11.4	153	
9	PINK	13.0	136	137'
10	YELLOW	14.8	116	
11	ORANGE	16.1	68	68'
12	BLUE	17.5	85	
13	RED	19.0	50	
14	PINK	20.3	38	38'


LOT 27 BELLS CROSSING SUBDIVISION

5-BEDROOM ACCEPTED STATUS GRAVITY SYSTEM
LINES 7-10 TOTAL 553 LINEAR FEET
EZFLOW OR CHAMBER
LTAR 0.3
25% REDUCTION
36" TRENCH DEPTH MAX

5-BEDROOM ACCEPTED STATUS GRAVITY REPAIR
LINES 1-6, 11-14 618 TOTAL LINEAR FEET
LTAR 0.3
25% REDUCTION
36" TRENCH DEPTH MAX

FOR GENERAL USE NOT A SURVEY
PRELIMINARY NOT FOR CONSTRUCTION

SOIL PROFILES AND ANALYSIS PROVIDED BY
CENTRAL CAROLINA SOIL CONSULTING PLLC

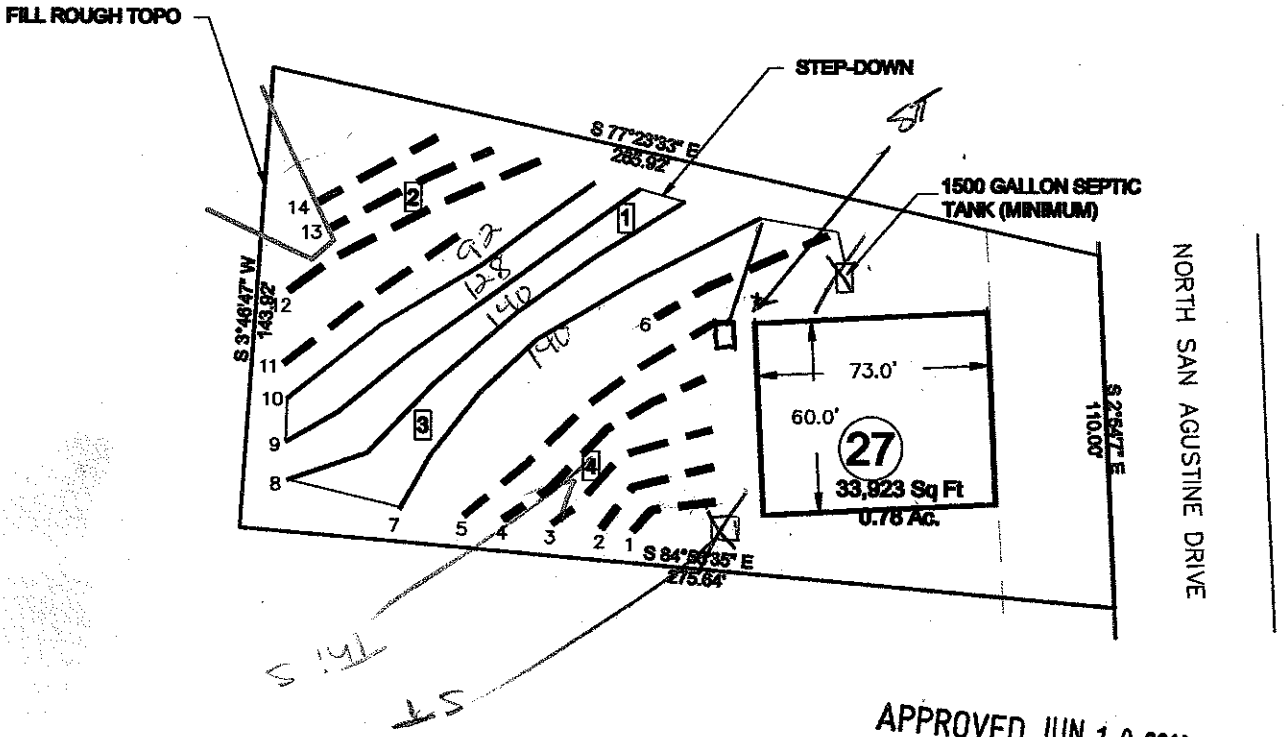

APPROVED JUN 10 2014
MP

PRIMARY SYSTEM

REPAIR SYSTEM

REPAIR LINES (NOT USED)

PIT OR AUGER BORING [1]

SCALE:
1" = 60 ft.

Bateman Civil Survey Company
Engineers • Surveyors • Planners
200 N. Main Street, Holly Springs, NC 27540 Ph: 919.577.1080 Fax: 919.577.1081
www.batemancivilsurvey.com info@batemancivilsurvey.com
NCBELS Firm No. C-3378

Meritage Homes

LOT 27
BELLS CROSSING SUBDIVISION
MOORESVILLE, NC
IREDELL COUNTY

DATE: 5/21/14 DRAWN BY MB CHECKED BY: TMB