

Acknowledgement Of
Plans Submittal ONLY!

APPROVED JUN 05 2015

Date 6-5-15



Opt
42x60 Shower

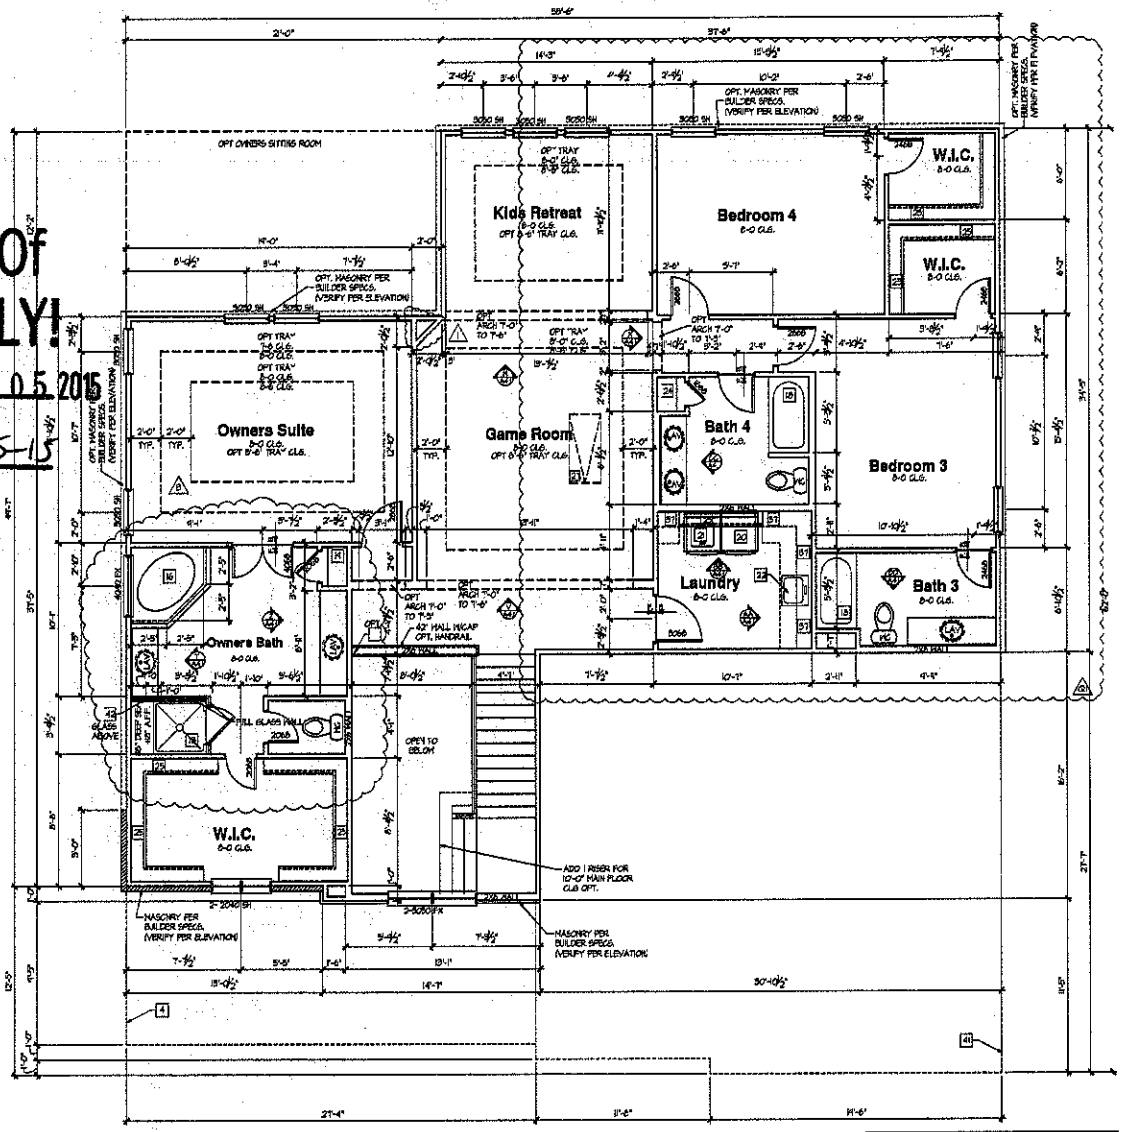

Upper Floor Plan - C

ALL EXTERIOR HOUSE WALLS MAY BE OPTIONAL 2X6 STUD WALLS - SEE STRUCTURAL PLANS FOR DETAILS.

FLOOR PLAN NOTES:

(NOTE P_2001)

9 THE FOLLOWING KEYNOTES REFERENCE THE SYMBOLS AS SHOWN ON PLANS

1. 9" RAILING / GUARDRAIL IS PROVIDED. ALL RAILING / GUARDRAIL BALUSTERS TO BE SPACED SUCH THAT A 4" SPHERE CANNOT PASS BETWEEN BALUSTERS. RAILING/GUARDRAILS ARE TO BE AT A 34" MINIMUM TO 38" MAXIMUM HEIGHT A.F.F. FOR STAIRS AND 36" MINIMUM ON HORIZONTAL SURFACE GUARDS.
2. LINE OF OVERHEAD GARAGE DOOR IN OPEN POSITION.
3. SLOPE GARAGE FLOOR 1/8" PER FOOT TOWARD OVERHEAD GARAGE DOOR OPENING.
4. FIREPLACE, AS SPECIFIED BY BUILDER. INSTALL PER MANUFACTURERS SPECIFICATIONS. ALL FACTORY BUILT FIREPLACES SHALL COMPLY WITH LOCAL CODES.
5. SINK W/ GARBAGE DISPOSAL
6. DISHWASHER
7. RANGE
8. COOK TOP
9. OVEN
10. REFRIGERATOR SPACE
11. PANTRY
12. RECESSAL SINK
13. 42" X 42" SHOWER
14. 60"X34"RECESSED TUB
15. 42" X 60" TUB 21" TO TOP OF DECKING
16. 60"X34" ROLLOVER TUB
17. 30" X 60" TUB/SHOWER
18. 60" X 60" TUB/SHOWER
19. LINEN (SHELVING PER BUILDER SPECS.)
20. WASHER SPACE
21. DRYER VENT
22. OPTIONAL LAUNDRY SINK
23. PROVIDE NON-COMBUSTIBLE PLATFORM ELEVATED 8" ABOVE GARAGE FLOOR FOR WATER HEATER.
24. 5 SHELVES PER BUILDER SPECS.
25. SOD AND SHRUB PER BUILDER SPECS.
26. ATTIC ACCESS (22 1/2"x30" (U.O.)
27. ATTIC ACCESS W/ STAIRS (25 1/2"x54 1/2")
28. GYPSUM BOARD OPENING @ 9'-0" IN MAIN FLOOR + 7'-0" AT UPPER FLOOR U.N.O.
29. GYPSUM BOARD ARCH @ T-2" TO 9'-0".
30. GYPSUM BOARD LOW WALL 36" A.F.F. (U.N.O.) W/ WOOD CAP.
31. SOFT T, REFER TO EXTERIOR ELEVATIONS FOR MASONITE & ARCHITECTURAL DETAILS FOR TRIM.
32. PLANT SHELF, SEE EXTERIOR ELEVATIONS.
33. HALF WALL W/ WOOD CAP OR OPTIONAL LOW WALL WITH RAILING ABOVE.
34. PORCH RAIL, SEE ELEVATION.
35. 36"x36" CONCRETE STOOP.
36. 6x6 BEAM
37. OPTIONAL UPPER CABINETS.
38. OPTIONAL CABINETS.
39. OPTIONAL COFFERED CEILING @ 9'-6" PER BUILDER SPEC.
40. LINE OF FRAMING ABOVE.
41. LINE OF FRAMING WALL BELOW.
42. 2X4 LOW WALL 42" A.F.F.
43. 2X6 LOW WALL 42" A.F.F.
44. ART NICHE
45. HORIZONTAL LAUNDRY CHUTE
46. LOW WALL 24" A.F.F.
47. GYPSUM BOARD ARCH @ 8'-0" TO 8'-6"
48. LOW WALL 22" A.F.F.
49. NO HAND LATCH OR LOCKING KNOB

TYPICAL CONSTRUCTION ASSEMBLIES:

A. TYPICAL ROOF CONSTRUCTION.
ASPHALT ROOF SHINGLES

B. TYPICAL FRAME FLOOR CONSTRUCTION.
FINISH FLOORING ON 3/4" TONGUE & GROOVE FLOOR SHEATHING ON FLOOR TRUSSES OR FLOOR JOISTS AS NOTED ON STRUCTURAL DRAWINGS.

C. SLAB ON GRADE FLOOR CONSTRUCTION.
4" CONCRETE SLAB, EXCEPT AS SPECIFIED BY SOIL REPORT, AND STRUCTURAL ENGINEER. INCLUDE VAPOR BARRIER PER SECTION IV, 5, 9.a

D. WINDOWS.
A. ALL WINDOWS SHALL COMPLY WITH MINIMUM STANDARDS OUTLINED IN APPLICABLE RES. CHECKS.
B. WINDOW SUPPLIER TO VERIFY AT LEAST ONE WINDOW IN ALL BEDROOMS TO HAVE A CLEAR EGRESS OPENING OF 5.7 SQ. F., WITH MIN. DIMENSION OF 24" X HEIGHT AND 20" IN WIDTH. SILL HEIGHT NOT GREATER THAN 44" ABOVE FLOOR.
C. TYPICAL WINDOW HEAD HEIGHT:
7'-0" A.F.F. @ 9'-1 1/8" PLATE HEIGHT (U.N.O.)
6'-0" A.F.F. @ 8'-1 1/8" PLATE HEIGHT (U.N.O.)

E. ELECTRICAL.
ALL ELECTRICAL AND MECHANICAL EQUIPMENT & METERS ARE SUBJECT TO RELOCATION DUE TO FIELD CONDITIONS. CONTRACTOR TO VERIFY.

F. HVAC.
PROVIDE BACK DRAFT DAMPERS @ DRYER VENT, HOOD VENT, & BATHROOM FANS.

G. STORE STONE.
INSTALL PER LOCAL CODE.

H. DIMENSIONS ARE TO THE FACE OF STUD, U.N.O.

I. ALL EXTERIOR 2" MEMBERS ARE TO FACE OF STUDS UNLESS OTHERWISE NOTED.

M. ALL ANGLED PARTITIONS ARE 45 DEGREES UNLESS OTHERWISE NOTED.

K. BRICK SIDING.
INSTALL PER LOCAL CODE.

ISSUE DATE: 01/17/2014
REVISIONS

5400 Tilghy Road
Suite 107
Raleigh,
North Carolina 27607
919-322-2255 Phone


Meritage Homes

Meritage Homes


BSB DESIGN
www.bsbdesign.com
6801 Westown Parkway, Suite 340
West Des Moines, Iowa 50266
515.273.2661

UPPER FLOOR PLAN - ELEVATION C


Plan 4268
A2.2C




Opt Inglenook Pocket Office



Main Floor
Opt Kitchen Island

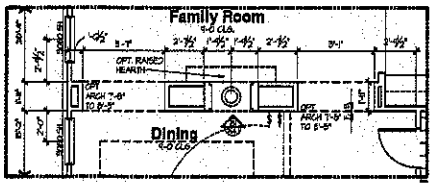

Main Floor - Opt Fireplace

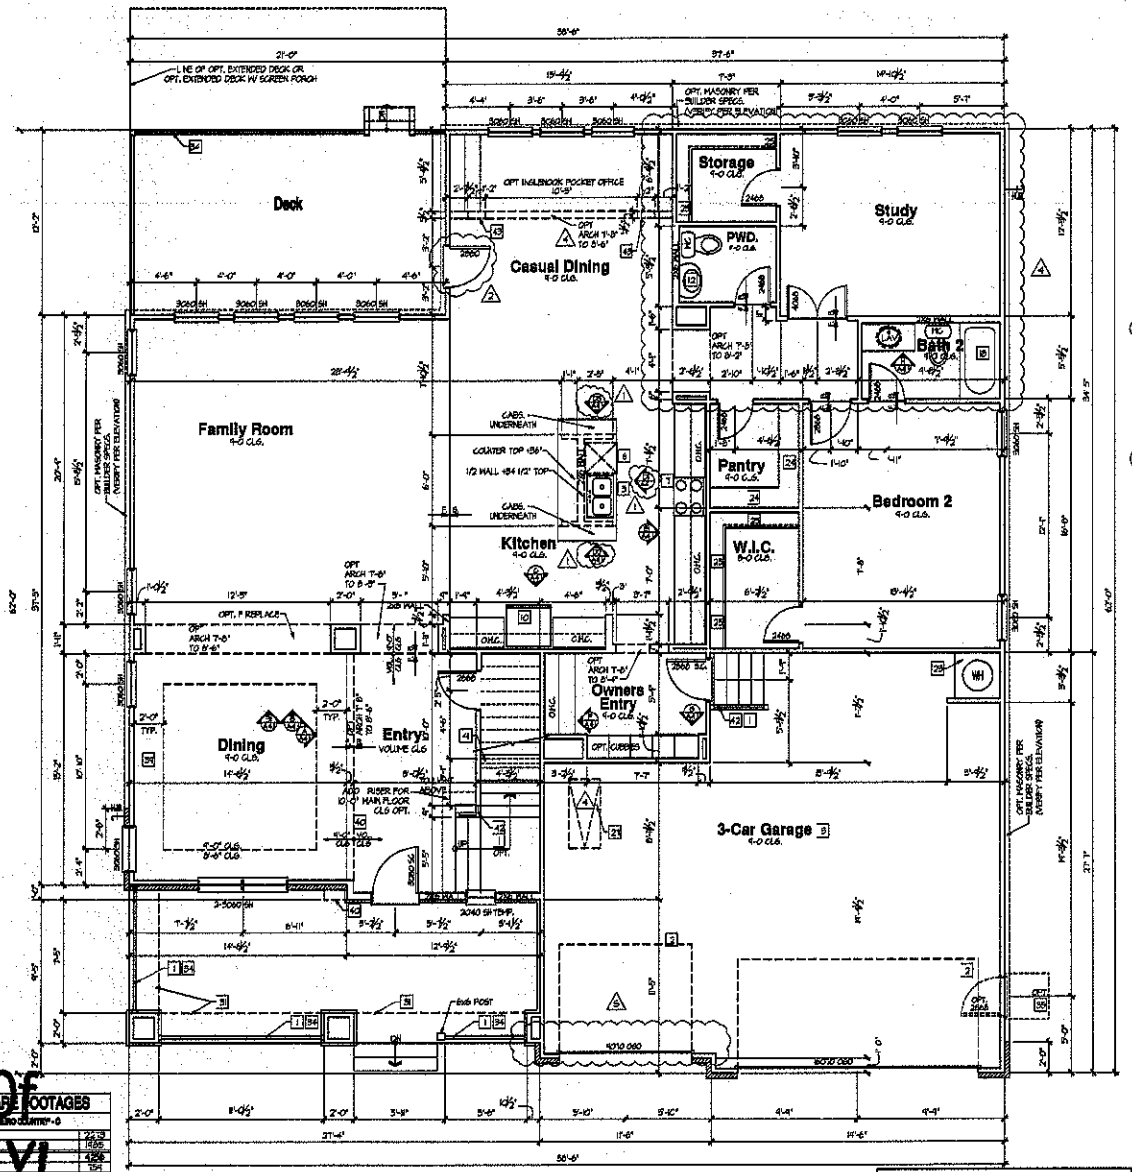

Main Floor Plan - C

ALL EXTERIOR HOUSE WALLS MAY BE OPTIONAL 2X6 STUD WALLS - SEE STRUCTURAL PLANS FOR DETAILS.

FLOOR PLAN NOTES:

(NOTE_F.2001)

▪ THE FOLLOWING KEYNOTES REFERENCE THE SYMBOLS AS SHOWN ON PLANS.

1. IF RAILING / GUARDRAIL IS PROVIDED, ALL RAILING / GUARDRAIL BALUSTERS TO BE SPACED SUCH THAT A 4" SPHERE CANNOT PASS BETWEEN BALUSTERS. RAILING/GUARDRAILS ARE TO BE AT A 34" MINIMUM TO 36" MAXIMUM HEIGHT A.F.F. FOR STAIRS, AND 36" MINIMUM OR HORIZONTAL SURFACE GUARDS.
2. LINE OF OVERHEAD GARAGE DOOR IN OPEN POSITION.
3. SLOPE GARAGE FLOOR 1/8" PER FOOT TOWARD OVERHEAD GARAGE DOOR OPENING.
4. FIREPLACE, AS SPECIFIED BY BUILDER. INSTALL PER MANUFACTURERS SPECIFICATIONS. ALL FACTORY BUILT FIREPLACES SHALL COMPLY WITH LOCAL CODES.
5. SINK, W/ GARBAGE DISPOSAL
6. DISHWASHER
7. RANGE
8. COOK TOP
9. OVEN
10. REFRIGERATOR SPACE.
11. PANTRY
12. PEDESTAL SINK
13. 42" X 42" SHOWER
14. 48" X 48" SHOWER
15. 42" X 60" TUB 2" TO TOP OF DECKING
16. 60" X 60" CORNER TUB
17. 30" X 60" TUB/SHOWER
18. 60" X 60" TUB/SHOWER
19. LINEN SHELVING PER BUILDER SPECS.)
20. WASHER SPACE
21. DRYER VENT
22. OPTIONAL LAUNDRY SINK.
23. PROVIDE NON-COMBUSTIBLE PLATFORM ELEVATED 8" ABOVE GARAGE FLOOR FOR WATER HEATER.
24. 5 SHELVES PER BUILDER SPECS.
25. LINEN SHELF PER WALL SECTIONS.
26. ATTIC ACCESS (23 1/2"x54 1/2" OVC)
27. ATTIC ACCESS W/ STAIRS (25 1/2"x54 1/2" OVC)
28. GYPSUM SOFFIT DROPPED 8"-0" AT MAIN FLOOR & 7'-0" AT UPPER FLOOR U.N.O.
29. GYPSUM BOARD ARCH @ 7'-2" TO 8'-0".
30. GYPSUM BOARD LOW WALL 36" A.F.F. (U.N.O.) W/ 4" CAP.
31. SOFFIT, REFER TO EXTERIOR ELEVATIONS FOR HDSR-TS & ARCHITECTURAL DETAILS FOR THICKNESS.
32. PLANT SHELF, SEE EXTERIOR ELEVATIONS.
33. HALF WALL W/ HOOD CAP OR OPTIONAL LOW WALL WITH RAILING ABOVE.
34. PORCH RAIL, SEE ELEVATION.
35. 28"x84" CONCRETE STOOP.
36. 6x6 BEAM.
37. OPTIONAL UPPER CABINETS.
38. OPTIONAL CABINETS.
39. OPTIONAL COFFERED CEILING @ 8'-6" PER BUILDER SPEC.
40. LINE OF FRAMING ABOVE.
41. LINE OF FRAMING WALL BELOW.
42. 2x4 LOW WALL 42" A.F.F.
43. 2X6 LOW WALL 42" A.F.F.
44. ART NICHE
45. HORIZONTAL LAUNDRY CHUTE
46. LOW WALL -34" A.F.F.
47. GYPSUM BOARD ARCH @ 8'-0" TO 8'-8"
48. LOW WALL 32" A.F.F.
49. NO HARD LATCH OR LOCKING KNOB

TYPICAL CONSTRUCTION ASSEMBLIES:

A. TYPICAL ROOF CONSTRUCTION: ASPHALT ROOF SHINGLES
B. TYPICAL FRAME FLOOR CONSTRUCTION: FINISH FLOORING ON 5/8" TONGUE & GROOVE FLOOR SHEATHING ON FLOOR TRUSSES OR FLOOR JOISTS AS NOTED ON STRUCTURAL DRAWINGS.
C. SLAB ON GRADE FLOOR CONSTRUCTION: 4" CONCRETE SLAB, EXCEPT AS SPECIFIED BY SOIL REPORT, AND STRUCTURAL ENGINEER. INCLUDE VAPOR BARRIER PER SECTION IV, C, 8, a.
D. WINDOWS:
   A. ALL WINDOWS SHALL COMPLY WITH MINIMUM STANDARDS OUTLINED IN APPLICABLE RES. CODES.
   B. WINDOW SUPPLIER TO VERIFY AT LEAST ONE WINDOW IN ALL BEDROOMS TO HAVE A CLEAR EGRESS OPENING OF 5.7 SQ. F., WITH MIN. DIMENSION OF 24" X HEIGHT AND 20" X WIDTH. SILL HEIGHT NOT GREATER THAN 44" ABOVE FLOOR.
   C. TYPICAL WINDOW HEAD HEIGHT: 7'-0" A.F.F. @ 8'-1 1/8" PLATE HEIGHT (U.N.O.) 8'-0" A.F.F. @ 9'-1 1/8" PLATE HEIGHT (U.N.O.)
E. ELECTRICAL: ALL ELECTRICAL AND MECHANICAL EQUIPMENT & METERS ARE SUBJECT TO RELOCATION DUE TO FIELD CONDITIONS. CONTRACTOR TO VERIFY.
F. HVAC: PROVIDE BACK DRAFT DAMPERS @ DRYER VENT, HOOD VENT, & EXHAUST FANS.
G. SMOKE SENSORS: INSTALL PER LOCAL CODE.
H. DIMENSIONS ARE TO THE FACE OF STUD, U.N.O.
I. ALL EXTERIOR DIMENSIONS ARE TO FACE OF STUDS UNLESS OTHERWISE NOTED.
K. ALL ANGLED PARTITIONS ARE 45 DEGREES UNLESS OTHERWISE NOTED.
K. BRICK SIDING: INSTALL PER LOCAL CODE.

SQUARE FOOTAGES	
MAIN FLOOR	2215
[illegible]	1855
[illegible]	1356
[illegible]	1151
[illegible]	210
[illegible]	3067
[illegible]	2266
[illegible]	2266
[illegible]	2266
[illegible]	1215
[illegible]	101

Acknowledgement Of Plans Submittal ONLY!

APPROVED Date JAN 05 2015

Date 6-5-15

5400 Tinsley Road
Suite 107
Raleigh,
North Carolina 27607
919.822.2266 Phone

Meritage Homes

Meritage Homes

BSB DESIGN

www.bsbdesign.com
5201 Windsor Parkway, Suite 240
West Des Moines, Iowa 50266
515.270.0201

MAIN FLOOR PLAN - ELEVATION C

Plan 4268
A2.1C