


Revised PP 3-2016

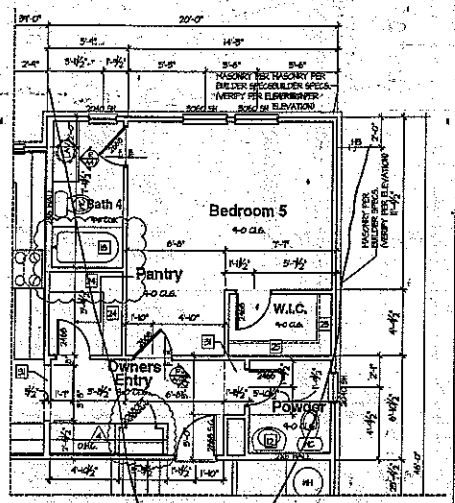

Main Floor - Opt Bedroom 5

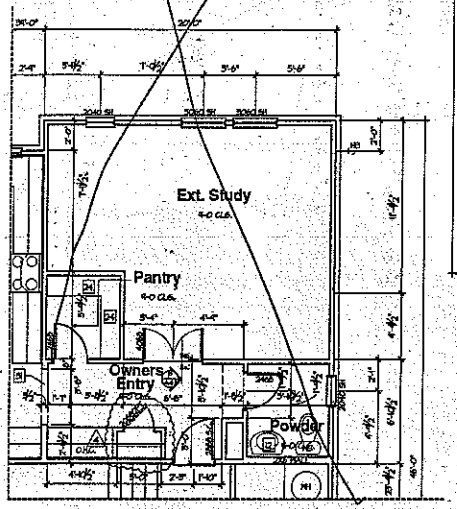

Main Floor - Opt. Ext. Study

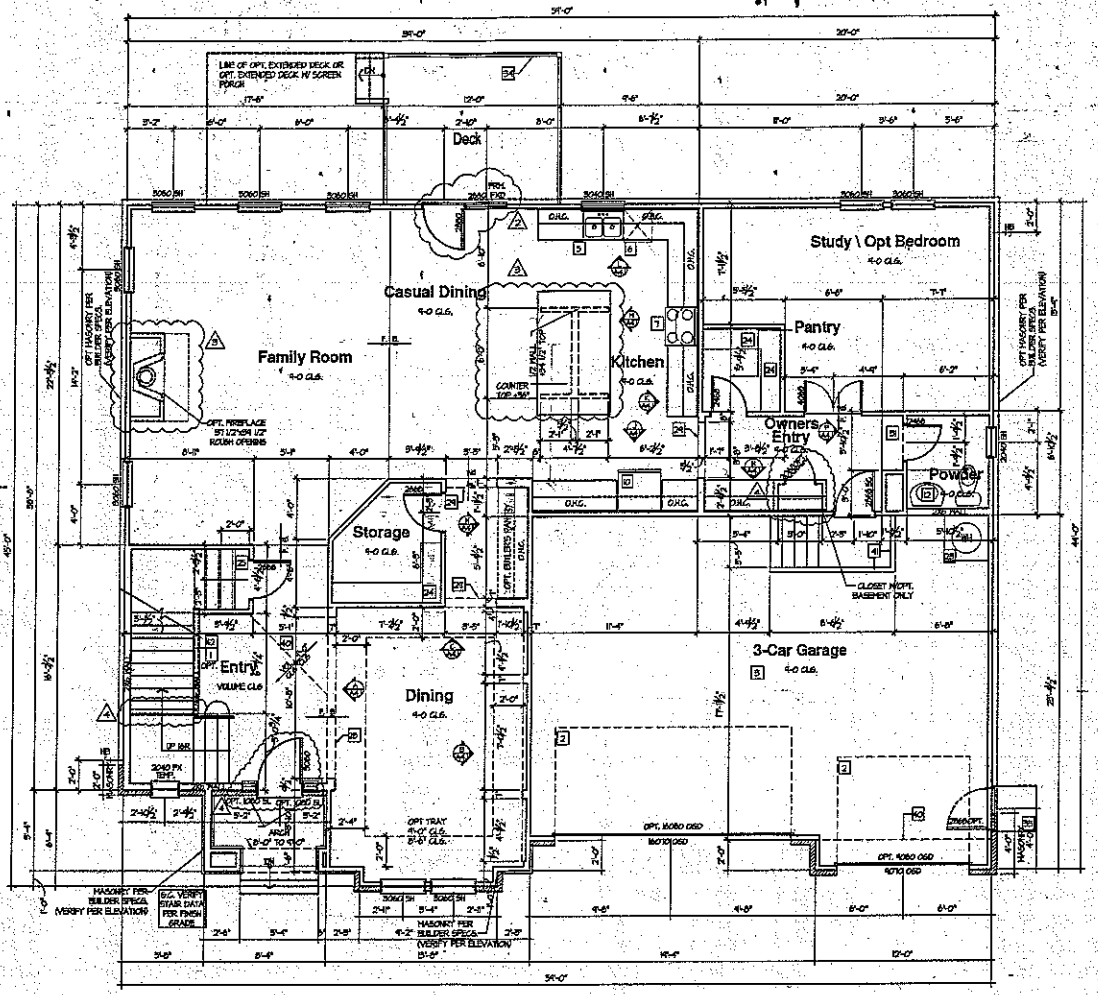

Main Floor Plan - C

ALL EXTERIOR HOUSE WALLS MAY BE OPTIONAL 2X6 STUD WALLS - SEE STRUCTURAL PLANS FOR DETAILS.

SQUARE FOOTAGES	
"C"	
MAIN FLOOR	1961
UPPER FLOOR	2279
SUBTOTAL	4070
GARAGE	644
PORCH	44
OPT. HOBBY ROOM	0
OPT SCREENED PORCH	0
TOTAL	4808

FLOOR PLAN NOTES:

[NOTE_FLOOR]

6 THE FOLLOWING KEYNOTES REFERENCE THE SYMBOLS AS SHOWN ON PLANS.

1. IF RAILING / GUARDRAIL IS PROVIDED, ALL RAILING / GUARDRAIL BALUSTERS TO BE SPACED SUCH THAT A 4" SPHERE CANNOT PASS BETWEEN BALUSTERS. RAILING/HANDRAILS ARE TO BE AT A 34" MINIMUM TO 38" MAXIMUM HEIGHT ABV. FOR STAIRS AND 36" MINIMUM ON HORIZONTAL SURFACE GUARDS.
2. LINE OF OVERHEAD GARAGE DOOR IN OPEN POSITION.
3. SLOPE GARAGE FLOOR 1/8" PER FOOT TOWARD OVERHEAD GARAGE DOOR OPENING.
4. FIREPLACE, AS SPECIFIED BY BUILDER. INSTALL PER MANUFACTURERS SPECIFICATIONS. ALL FACTORY BUILT FIREPLACES SHALL COMPLY WITH LOCAL CODES.
5. SINK W/ GARBAGE DISPOSAL
6. DISHWASHER
7. RANGE
8. COOK TOP
9. OVEN
10. REFRIGERATOR SPACE.
11. PANTRY
12. MEDICINE SINK
13. SHOWER (SIZE AS NOTED)
14. WIC
15. 42" X 60" TUB 21" TO TOP OF DECKING
16. 60"x60" CORNER TUB
17. 36" X 60" TUB/SHOWER
18. 60" X 60" TUB/SHOWER
19. LINEN (SHELVING PER BUILDER SPECS.)
20. WASHER SPACE
21. DRYER VENT
22. OPTIONAL LAUNDRY SINK.
23. PROVIDE NON-COMBUSTIBLE PLATFORM ELEVATED 18" ABOVE GARAGE FLOOR FOR WATER HEATER.
24. 5 SHELVES PER BUILDER SPECS.
25. LINEN AND LINEN/BUILDING AREAS
26. ATTIC ACCESS (22 1/2"x30" U.N.O.)
27. ATTIC ACCESS W/ STAIRS (25 1/2"x54 1/2" U.N.O.)
28. SYTEM SOFFIT OPENING @ 8'-0" AFF. MAX. FLOOR & 7'-0" AT UPPER FLOOR U.N.O.
29. GYPSUM BOARD ARCH @ 7'-2" TO 8'-0".
30. GYPSUM BOARD LOH WALL, 58" A.F.F. (U.N.O.) W/ CAP.
31. SCRIPT: REFER TO EXTERIOR ELEVATIONS FOR HEIGHTS & ARCHITECTURAL DETAILS FOR FINISH.
32. PLANT SHELF, SEE EXTERIOR ELEVATIONS.
33. HALF WALL W/ WOOD CAP OR OPTIONAL LOH WALL WITH RAILING ABOVE.
34. PORCH RAIL, SEE ELEVATION.
35. 36"x36" CONCRETE STOOP.
36. 6x8 BEAM.
37. OPTIONAL UPPER CABINETS.
38. OPTIONAL CABINETS.
39. OPTIONAL COFFERED CEILING @ 8'-0" PER BUILDER SPEC.
40. LINE OF FRAMING ABOVE.
41. LINE OF FRAMING WALL BELOW.
42. 2X4 LOH WALL 42" A.F.F.
43. 2X6 LOH WALL 42" A.F.F.
44. ART NICHE
45. HORIZONTAL LAUNDRY CHUTE
46. LOH WALL 42" A.F.F.
47. GYPSUM BOARD ARCH @ 8'-0" TO 8'-6"
48. LOH WALL 30" A.F.F.
49. NO HARD LATCH OR LOCKING KNOB

TYPICAL CONSTRUCTION ASSEMBLIES:

A. TYPICAL ROOF CONSTRUCTION: ASPHALT ROOF SHINGLES

B. TYPICAL FRAME FLOOR CONSTRUCTION: FINISH FLOORING ON 3/4" TONGUE & GROOVE FLOOR SHEATHING ON FLOOR TRUSSES OR FLOOR JOISTS AS NOTED ON STRUCTURAL DRAWINGS.

C. SLAB ON GRADE FLOOR CONSTRUCTION: 4" CONCRETE SLAB, EXCEPT AS SPECIFIED BY SOIL REPORT, AND STRUCTURAL ENGINEER. INCLUDE VAPOR BARRIER PER SECTION N, G, 5, c.

D. WINDOWS:
A. ALL WINDOWS SHALL COMPLY WITH MINIMUM STANDARDS OUTLINED IN APPLICABLE RES. CHECKS.
B. WINDOW SUPPLIER TO VERIFY AT LEAST ONE WINDOW IN ALL BEDROOMS TO HAVE A CLEAR EGRESS OPENING OF 5.7 SQ. FT. WITH A MIN. DIMENSION OF 24" IN HEIGHT AND 20" IN WIDTH. SILL HEIGHT NOT GREATER THAN 44" ABOVE FLOOR.
C. TYPICAL WINDOW HEAD HEIGHT: 7'-0" A.F.F. @ 8'-1 1/8" PLATE HEIGHT (U.N.O.) 8'-0" A.F.F. @ 9'-1 1/8" PLATE HEIGHT (U.N.O.)

E. ELECTRICAL: ALL ELECTRICAL AND MECHANICAL EQUIPMENT & METERS ARE SUBJECT TO RELOCATION DUE TO FIELD CONDITIONS, CONTRACTOR TO VERIFY.

F. HVAC: PROVIDE BACK DRAFT DAMPERS @ DRYER VENT, HOOD VENT, & EXHAUST FANS.

G. STONE DRIVE: INSTALL PER LOCAL CODE.

H. DIMENSIONS ARE TO THE FACE OF STUD, U.N.O.

I. ALL EXTERIOR DIMENSIONS ARE TO FACE OF STUDS UNLESS OTHERWISE NOTED.

J. ALL ANGLED PARTITIONS ARE 45 DEGREES UNLESS OTHERWISE NOTED.

K. BRICK DRIVE: INSTALL PER LOCAL CODE.

ISSUE DATE: 01/17/2014

REVISIONS

5400 Trinity Road
Suite 107
Raleigh, North Carolina 27607
919-322-2285 Phone

Meritage Homes

Meritage Homes

BSB DESIGN

www.bsbdesign.com
4901 Westown Parkway, Suite 206
West Des Moines, Iowa 50266
515 875 5001

JOB NO: PROJ MGR: JF
DRAWN: JF CHECKED: JF

MAIN FLOOR PLAN - C


259-4062

A2.1C

Acknowledgement of Plans Submittal ONLY!

Date 1-25-16

Date 1/26/16

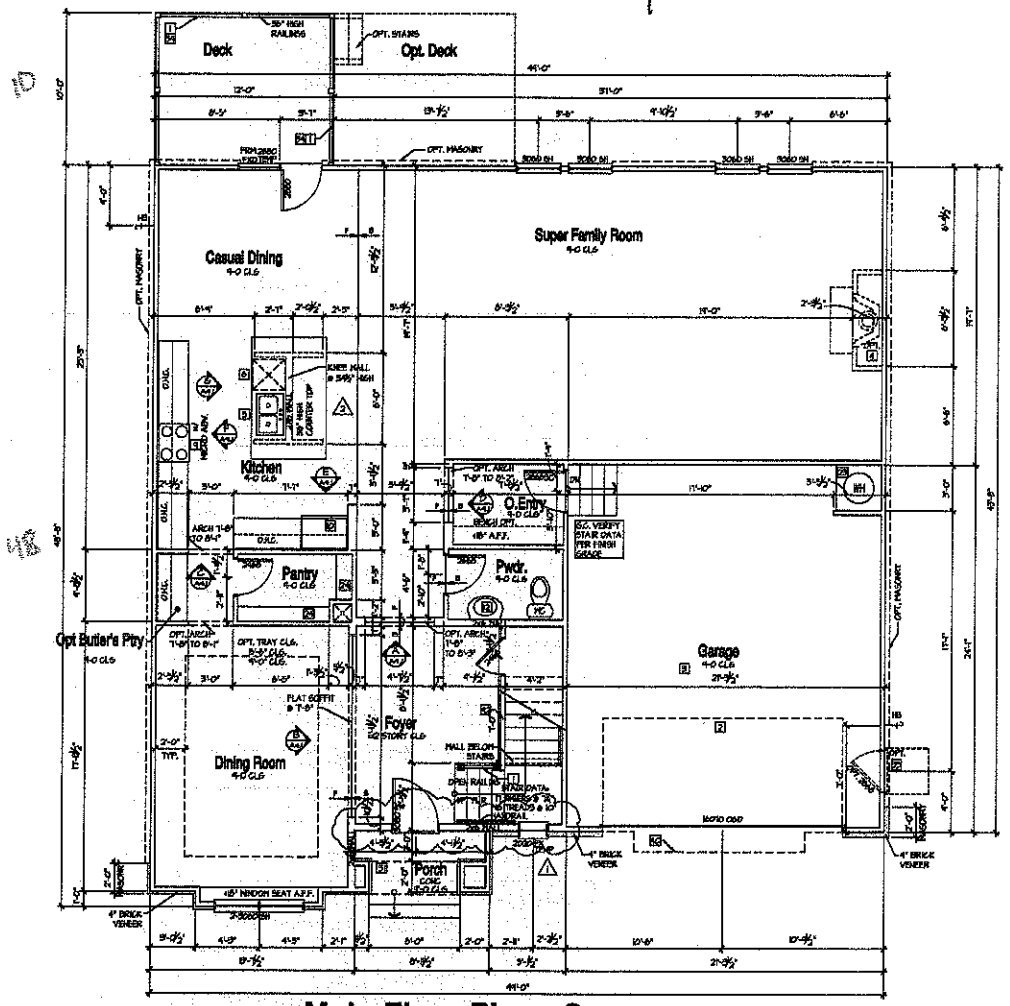

Main Floor Plan - C

TYPICAL CONSTRUCTION ASSEMBLIES:

A. TYPICAL ROOF CONSTRUCTION:
ASPHALT ROOF SHINGLES

B. TYPICAL FRAME FLOOR CONSTRUCTION:
FINISH FLOORING ON 3/4" TONGUE & GROOVE FLOOR SHEATHING ON FLOOR TRUSSES OR FLOOR JOISTS AS NOTED ON STRUCTURAL DRAWINGS.

C. SLAB ON GRADE FLOOR CONSTRUCTION:
4" CONCRETE SLAB, EXCEPT AS SPECIFIED BY SOIL REPORT AND STRUCTURAL ENGINEER. INCLUDE VAPOR BARRIER PER SECTION M, G, 3, a.

D. WINDOWS:
A. ALL WINDOWS SHALL COMPLY WITH MINIMUM STANDARDS OUTLINED IN APPLICABLE RES. CHECKS.
B. WINDOW SUPPLIER TO VERIFY AT LEAST ONE WINDOW IN ALL BEDROOMS TO HAVE A CLEAR EGRESS OPENING OF 5.7 SQ. FT. WITH MIN DIMENSION OF 24" IN HEIGHT AND 20" IN WIDTH SILL HEIGHT NOT GREATER THAN 44" ABOVE FLOOR.
C. TYPICAL WINDOW HEAD HEIGHT:
1'-0" A.F.F @ 8'-1 1/8" PLATE HEIGHT (U.N.O.)
8'-0" A.F.F @ 9'-1 1/8" PLATE HEIGHT (U.N.O.)

E. ELECTRICAL:
ALL ELECTRICAL AND MECHANICAL EQUIPMENT & METERS ARE SUBJECT TO RELOCATION DUE TO FIELD CONDITIONS) CONTRACTOR TO VERIFY.

F. VENTS:
PROVIDE BACK DRAFT DAMPERS @ DRYER VENT, HOOD VENT, & EXHAUST FANS.

G. STONE FACING:
INSTALL PER LOCAL CODE.

H. DIMENSIONS ARE TO THE FACE OF STUD, U.N.O.

I. ALL EXTERIOR DIMENSIONS ARE TO FACE OF STUDS UNLESS OTHERWISE NOTED.

J. ALL ANGLED PARTITIONS ARE 45 DEGREES UNLESS OTHERWISE NOTED

K. BRICK FACING:
INSTALL PER LOCAL CODE.

FLOOR PLAN NOTES:

(MORE FLOORS)

4 THE FOLLOWING KEYNOTES REFERENCE THE SYMBOLS AS SHOWN ON PLANS.

1. IF RAILING / GUARDRAIL IS PROVIDED, ALL RAILINGS / GUARDRAIL BALUSTERS TO BE SPACED SUCH THAT A 4" SPHERE CANNOT PASS BETWEEN BALUSTERS. RAILINGS/HANDRAILS ARE TO BE AT A 34" MINIMUM TO 38" MAXIMUM HEIGHT A.F.F. FOR STAIRS AND 36" MINIMUM ON HORIZONTAL SURFACE GUARDS.
2. LINE OF OVERHEAD GARAGE DOOR IN OPEN POSITION.
3. SLOPE GARAGE FLOOR 1/8" PER FOOT TOWARD OVERHEAD GARAGE DOOR OPENING.
4. FIREPLACE, AS SPECIFIED BY BUILDER, INSTALL PER MANUFACTURERS SPECIFICATIONS. ALL FACTORY BUILT FIREPLACES SHALL COMPLY WITH LOCAL CODES.
5. SINK W/ GARBAGE DISPOSAL
6. DISHWASHER
7. RANGE
8. COOK TOP
9. OVEN
10. REFRIGERATOR SPACE.
11. PANTRY
12. PEDESTAL SINK
13. LINEN CLOSET (SHELVES PER BUILDER SPECS.)
14. WASHER SPACE
15. 42" X 60" TUB
16. 60" X 60" CORNER TUB
17. N/A
18. 32" X 60" TUB/SHOWER
19. LINEN SHELVING PER BUILDER SPECS.)
20. WASHER SPACE
21. DRYER, VENT
22. OPTIONAL LAUNDRY SINK.
23. PROVIDE NON-COMBUSTIBLE PLATFORM ELEVATED 18" ABOVE GARAGE FLOOR FOR WATER HEATER.
24. 5 SHELVES
25. ROD AND SHELF PER BUILDER SPECS.
26. ATTIC ACCESS (22"x30" U.N.O.).
27. ATTIC ACCESS W/ STAIRS (25 1/2"x54 1/2").
28. GYPSUM BOARD OPENING @ 8'-0" AT MAIN FLOOR & 7'-0" AT UPPER FLOOR U.N.O.
29. GYPSUM BOARD ARCH @ 1'-2" TO 8'-0".
30. GYPSUM BOARD LOW WALL, 36" A.F.F. (U.N.O.) W/ MDF CAP.
31. SOFFIT, REFER TO EXTERIOR ELEVATIONS FOR HEIGHTS & ARCHITECTURAL DETAILS FOR FINISH.
32. PLANT SHELF, SEE EXTERIOR ELEVATIONS.
33. HALF WALL W/ MDF CAP OR OPTIONAL LOW WALL WITH RAILING ABOVE.
34. PORCH RAIL, SEE ELEVATION.
35. 36"x36" CONCRETE STOOP.
36. 8x8 BEAM.
37. OPTIONAL UPPER CABINETS.
38. OPTIONAL CABINETS.
39. OPTIONAL COFFERED CEILING @ 8'-0" PER BUILDER SPEC.
40. LINE OF FRAMING ABOVE.
41. LINE OF FRAMING WALL BELOW.
42. 2'-4" LOW WALL 42" A.F.F.
43. 2'-8" LOW WALL 42" A.F.F.
44. ART NICHE
45. HORIZONTAL LAUNDRY CHUTE
46. LOW WALL 42" A.F.F.
47. GYPSUM BOARD ARCH @ 8'-0" TO 8'-8"
48. LOW WALL 32 1/2" A.F.F.

SQUARE FOOTAGES

MAIN FLOOR	2041
UPPER FLOOR	2030
SUBTOTAL	4170
GARAGE	535
PORCH	91
DECK	105
TOTAL	4900
OPT 2-CAR GARAGE	(528)
OPT EXTENDED DECK	(162)
OPT SCREENED PORCH	(120)

ISSUE DATE: 01/17/2014
REVISIONS

5400 Trinity Road
Suite 107
Raleigh,
North Carolina 27607
919-322-2285 Phone

Meritage Homes

Meritage Homes


BSB DESIGN
www.bsbdesign.com
4291 Wilsonville Parkway, Suite 205
West Des Moines, Iowa 50266
515.270.8300

MAIN FLOOR PLAN - C

PLAN 249 - 3711

A2.1C

Revised FP - 3/2016

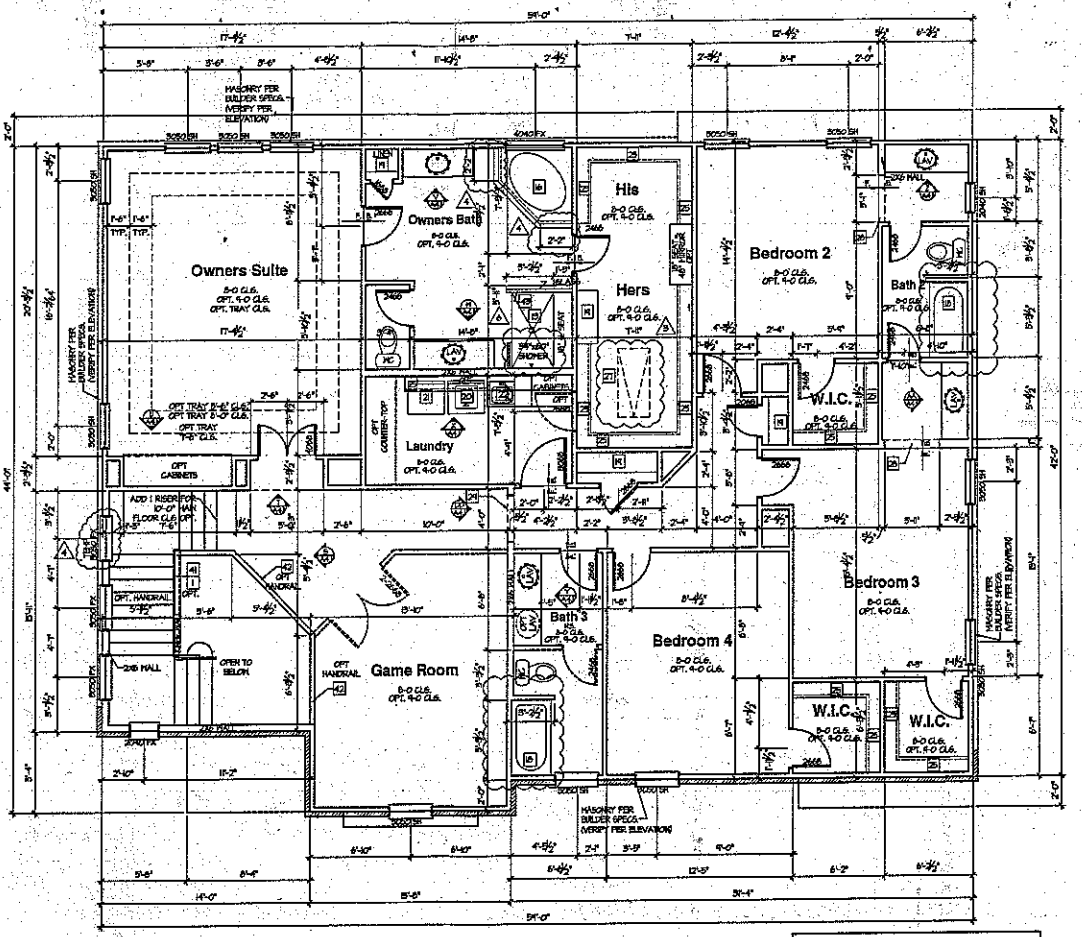

Upper Floor Plan - C

0 2' 4' 8'

ALL EXTERIOR HOUSE WALLS MAY BE OPTIONAL 2X6 STUD WALLS - SEE STRUCTURAL PLANS FOR DETAILS.

FLOOR PLAN NOTES:

NOTE KEYNOTE

THE FOLLOWING KEYNOTES REFERENCE THE SYMBOLS AS SHOWN ON PLANS:

1. IF RAILING / GUARDRAIL IS PROVIDED, ALL RAILING / GUARDRAIL BALUSTERS TO BE SPACED SUCH THAT A 4" SPHERE CANNOT PASS BETWEEN BALUSTERS. RAILING/GUARDRAILS ARE TO BE AT A 34" MINIMUM TO 38" MAXIMUM HEIGHT A.F.F. FOR STAIRS AND 36" MINIMUM ON HORIZONTAL SURFACE GUARDS.
2. LINE OF OVERHEAD GARAGE DOOR IN OPEN POSITION.
3. SLOPE GARAGE FLOOR 1/8" PER FOOT TOWARD OVERHEAD GARAGE DOOR OPENING.
4. FIREPLACE, AS SPECIFIED BY BUILDER. INSTALL PER MANUFACTURERS SPECIFICATIONS. ALL FACTORY BUILT FIREPLACES SHALL COMPLY WITH LOCAL CODES.
5. SINK W/ GARBAGE DISPOSAL
6. DISHWASHER
7. RANGE
8. COOK TOP
9. OVEN
10. REFRIGERATOR SPACE.
11. PANTRY.
12. PEDESTAL SINK.
13. SHOWER (SIZE AS NOTED)
14. TUB
15. 42" X 60" TUB 20" TO TOP OF DECKING
16. 60" X 60" CORNER TUB
17. 60" X 60" TUB/SHOWER
18. 72" X 60" TUB/SHOWER
19. LINEN SHELVING PER BUILDER SPECS.)
20. WASHER SPACE
21. DRYER VENT
22. OPTIONAL LAUNDRY SINK.
23. PROVIDE NON-COMBUSTIBLE PLATFORM ELEVATED 30" ABOVE GARAGE FLOOR FOR WATER HEATER.
24. 5 SHELVES PER BUILDER SPECS.
25. SOFFIT AND CHASE PER BUILDER SPECS.
26. ATTIC ACCESS (22 1/2"x30" U.N.O.)
27. ATTIC ACCESS W/ STAIRS (25 1/2"x54 1/2")
28. SHELF AND CLOTHES ROD @ 5'-4" AT WALK IN CLOSET
29. GYPSUM BOARD CEILING @ 9'-0" AT MAIN FLOOR & 8'-0" AT UPPER FLOOR U.N.O.
30. GYPSUM BOARD ARCH @ 7'-2" TO 8'-0".
31. GYPSUM BOARD LOW WALL 36" A.F.F. (U.N.O.) W/ NOF CAP.
32. SOFFIT, REFER TO EXTERIOR ELEVATIONS FOR HEIGHTS & ARCHITECTURAL DETAILS FOR FINISH.
33. PLANT SHELF, SEE EXTERIOR ELEVATIONS.
34. HALF WALL W/ HOOD CAP OR OPTIONAL LOW WALL WITH RAIL ABOVE.
35. PORCH RAIL, SEE ELEVATION
36. 36"x36" CONCRETE STOOP.
37. 6x8 BEAM.
38. OPTIONAL UPPER CABINETS.
39. OPTIONAL CABINETS.
40. OPTIONAL COFFERED CEILING @ 8'-4" PER BUILDER SPEC.
41. LINE OF FRAMING ABOVE.
42. LINE OF FRAMING WALL BELOW.
43. 2X4 LOW WALL 42" A.F.F.
44. 2X6 LOW WALL 42" A.F.F.
45. ART NICHE
46. HORIZONTAL LAUNDRY CHUTE
47. LOW WALL 42" A.F.F.
48. GYPSUM BOARD ARCH @ 8'-0" TO 8'-8"
49. LOW WALL 32" A.F.F.
50. NO HARD LATCH OR LOCKING KNOB

TYPICAL CONSTRUCTION ASSEMBLIES:

A. TYPICAL ROOF CONSTRUCTION:
ASPHALT ROOF SHINGLES.

B. TYPICAL FRAME FLOOR CONSTRUCTION:
FINISH FLOORING ON 3/4" TONGUE & GROOVE FLOOR SHEATHING ON FLOOR TRUSSES OR FLOOR JOISTS AS NOTED ON STRUCTURAL DRAWINGS.

C. SLAB ON GRADE FLOOR CONSTRUCTION:
4" CONCRETE SLAB, EXCEPT AS SPECIFIED BY SOIL REPORT AND STRUCTURAL ENGINEER. INCLUDE VAPOR BARRIER PER SECTION IV, C, 3, a.

D. WINDOWS:
A. ALL WINDOWS SHALL COMPLY WITH MINIMUM STANDARDS OUTLINED IN APPLICABLE RES. CHECKS.
B. WINDOW SUPPLIER TO VERIFY AT LEAST ONE WINDOW IN ALL BEDROOMS TO HAVE A CLEAR EGRESS OPENING OF 5.7 SQ. FT. WITH MIN. DIMENSION OF 24" IN HEIGHT AND 20" IN WIDTH. SILL HEIGHT NOT GREATER THAN 44" ABOVE FLOOR.
C. TYPICAL WINDOW HEAD HEIGHT:
7'-0" A.F.F. @ 8'-1 1/8" PLATE HEIGHT (U.N.O.)
8'-0" A.F.F. @ 9'-1 1/8" PLATE HEIGHT (U.N.O.)

E. ELECTRICAL:
ALL ELECTRICAL AND MECHANICAL EQUIPMENT & METERS ARE SUBJECT TO RELOCATION DUE TO FIELD CONDITIONS. CONTRACTOR TO VERIFY.

F. HVAC:
PROVIDE BACK DRAFT DAMPERS @ DRYER VENT, HOOD VENT, & EXHAUST FANS.

G. SMOKE DETECTORS:
INSTALL PER LOCAL CODE.

H. DIMENSIONS ARE TO THE FACE OF STUD, U.N.O.

I. ALL EXTERIOR DIMENSIONS ARE TO FACE OF STUDS UNLESS OTHERWISE NOTED.

J. ALL ANGLED PARTITIONS ARE 45 DEGREES UNLESS OTHERWISE NOTED.

K. BRICK LEDGE:
INSTALL PER LOCAL CODE.

ISSUE DATE: 01/17/2014

REVISIONS

5400 Trinity Road
Suite 107
Raleigh,
North Carolina 27607
919-322-2285 Phone

Meritage Homes

Meritage Homes

BSB DESIGN
www.bsbdesign.com
4901 Westown Parkway, Suite 206
West Des Moines, Iowa 50266
515 273 8020

JOB NO: 259-4062
DRAWN: JF
PROJ MGR: JF
DATE: 2/6/2016

UPPER FLOOR PLAN - C


259-4062

A2.2C

Acknowledgement of Plans Submittal ONLY!


Date 1-25-16

Date 1/26/16

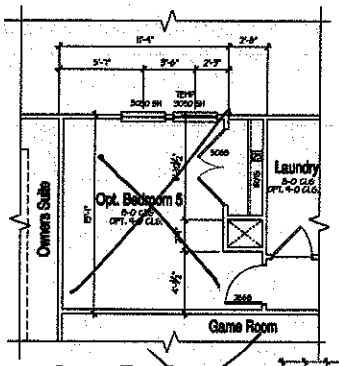

Opt. Bedroom 5

MDB
1-25-16

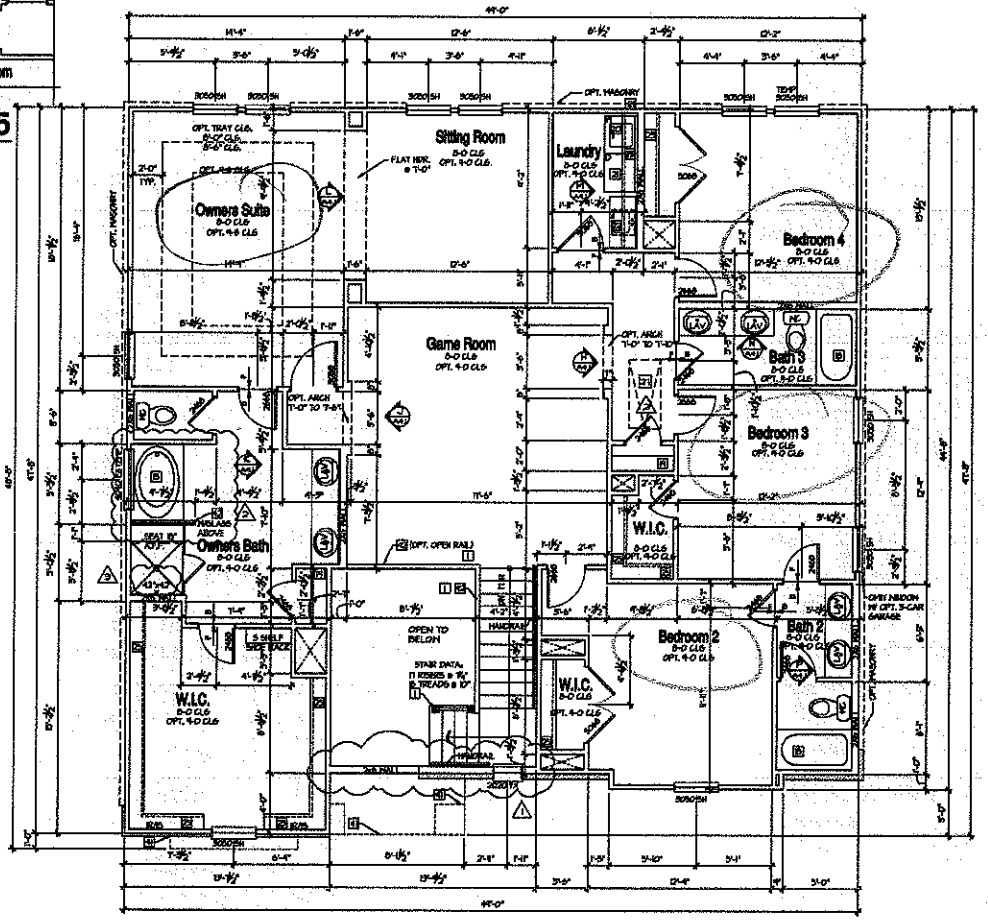

Upper Floor Plan - C

TYPICAL CONSTRUCTION ASSEMBLIES:

A. TYPICAL ROOF CONSTRUCTION:
ASPHALT ROOF SHINGLES

B. TYPICAL FRAME FLOOR CONSTRUCTION:
FRAME FLOORING ON 3/4" TONGUE & GROOVE FLOOR SHEATHING ON FLOOR TRUSSES OR FLOOR JOISTS AS NOTED ON STRUCTURAL DRAWINGS.

C. SLAB ON GRADE FLOOR CONSTRUCTION:
4" CONCRETE SLAB, EXCEPT AS SPECIFIED BY SOIL REPORT, AND STRUCTURAL ENGINEER. INCLUDE VAPOR BARRIER PER SECTION N1103.2.2.

D. WINDOWS:
A. ALL WINDOWS SHALL COMPLY WITH MINIMUM STANDARDS OUTLINED IN APPLICABLE RES. CHECKS.
B. WINDOW SUPPLIER TO VERIFY AT LEAST ONE WINDOW IN ALL BEDROOMS TO HAVE A CLEAR EGRESS OPENING OF 5.7 SQ. FT. WITH MIN. DIMENSION OF 24" IN HEIGHT AND 20" IN WIDTH. SILL HEIGHT NOT GREATER THAN 44" ABOVE FLOOR.
C. TYPICAL WINDOW HEAD HEIGHT:
7'-0" A.F.F @ 8'-1 1/8" PLATE HEIGHT (MAIN)
9'-0" A.F.F @ 9'-1 1/8" PLATE HEIGHT (MAIN)

E. ELECTRICAL:
ALL ELECTRICAL AND MECHANICAL EQUIPMENT & METERS ARE SUBJECT TO RELOCATION DUE TO FIELD CONDITIONS. CONTRACTOR TO VERIFY.

F. HVAC:
PROVIDE BACK DRAFT DAMPERS @ DRYER VENT, HOOD VENT, & EXHAUST FANS.

G. STONE SILLS:
INSTALL PER LOCAL CODE.

H. DIMENSIONS ARE TO THE FACE OF STUD, U.N.O.

I. ALL EXTERIOR DIMENSIONS ARE TO FACE OF STUDS UNLESS OTHERWISE NOTED.

M. ALL ANGLED PARTITIONS ARE 45 DEGREES UNLESS OTHERWISE NOTED.

N. BRICK SILLS:
INSTALL PER LOCAL CODE.

FLOOR PLAN NOTES:

6 THE FOLLOWING KEYNOTES REFERENCE THE SYMBOLS AS SHOWN ON PLANS.

1. 9" RAILING / BANDRAIL IS PROVIDED, ALL RAILING / BANDRAIL BALUSTERS TO BE SPACED SUCH THAT A 4" SPHERE CANNOT PASS BETWEEN BALUSTERS.
RAILS/HANDRAILS ARE TO BE AT A 34" MINIMUM TO 38" MAXIMUM HEIGHT A.F.F. FOR STAIRS AND 36" MINIMUM ON HORIZONTAL SURFACE GUARDS.
2. LINE OF OVERHEAD GARAGE DOOR IN OPEN POSITION.
3. SLOPE GARAGE FLOOR 1/8" PER FOOT TOWARD OVERHEAD GARAGE DOOR OPENING.
4. FIREPLACE, AS SPECIFIED BY BUILDER. INSTALL PER MANUFACTURERS SPECIFICATIONS. ALL FACTORY BUILT FIREPLACES SHALL COMPLY WITH LOCAL CODES.
5. SINK W/ GARBAGE DISPOSAL
6. DISHWASHER
7. RANGE
8. COOK TOP
9. OVEN
10. REFRIGERATOR SPACE.
11. PANTRY
12. PEDESTAL SINK
13. SHOWER (SIZE AS NOTED)
14. N/A
15. 42" X 60" TUB
16. 60" X 60" CORNER TUB
17. N/A
18. 32" X 60" TEMSHOWER
19. LINEN SHELVING PER BUILDER SPECS.)
20. WASHER SPACE
21. DRYER VENT
22. OPTIONAL LAUNDRY SINK.
23. PROVIDE NON-COMBUSTIBLE PLATFORM ELEVATED 30" ABOVE GARAGE FLOOR FOR WATER HEATER.
24. 5 SHELVES
25. 1600 AND SHELF PER BUILDER SPECS.
26. ATTIC ACCESS (22"x30" U.N.O.).
27. ATTIC ACCESS W/ STAIRS (25 1/2"x54 1/2").
28. GYPSUM BOARD OPENING @ 8'-0" AT MAIN FLOOR & 7'-0" AT UPPER FLOOR U.N.O.
29. GYPSUM BOARD ARCH @ 7'-2" TO 8'-0".
30. GYPSUM BOARD LOW WALL, 36" A.F.F. (U.N.O.) W/ 16" CAP.
31. SOFFIT, REFER TO EXTERIOR ELEVATIONS FOR HEIGHTS & ARCHITECTURAL DETAILS FOR FINISH.
32. PLANT SHELF, SEE EXTERIOR ELEVATIONS.
33. HALF WALL W/ WOOD CAP OR OPTIONAL LOW WALL IRON RAILING ABOVE.
34. PORCH RAIL SEE ELEVATION.
35. 36"x36" CONCRETE STOOP.
36. 6x6 BEAM.
37. OPTIONAL UPPER CABINETS.
38. OPTIONAL CABINETS.
39. OPTIONAL COFFERED CEILING @ 8'-6" PER BUILDER SPEC.
40. LINE OF FRAMING ABOVE.
41. LINE OF FRAMING WALL BELOW.
42. 2x4 LOW WALL 42" A.F.F.
43. 2x6 LOW WALL 42" A.F.F.
44. ART NICHE
45. HORIZONTAL LAUNDRY CHUTE
46. LOW WALL 42" A.F.F.
47. GYPSUM BOARD ARCH @ 8'-0" TO 8'-6"
48. LOW WALL 32" A.F.F.

SQUARE FOOTAGES

MAIN FLOOR	1694
UPPER FLOOR	2021
SUBTOTAL	3715
GARAGE	569
PORCH	91
DECK	170
TOTAL	4395
OPT 3-CAR GARAGE	428
OPT EXTENDED DECK	420
OPT COVERED PORCH	450

ISSUE DATE: 01/17/2014
REVISIONS

5400 Trinity Road
Suite 107
Raleigh,
North Carolina 27607
919-322-2365 Phone

Meritage Homes

Meritage Homes

BSB DESIGN

www.bsbdesign.com
4521 Westown Parkway, Suite 202
West Des Moines, Iowa 50266
515.975.3929

UPPER FLOOR PLAN - C

PLAN 249 - 3711

A2.2C