LP PPBPS SYSTEM
FOR WASTEWATER TREATMENT

Owner/Applicant: THE ORCHARDS LLC

Address: 227 Hideaway Lane
Mooresville, NC 28117
Phone: 704-201-6465
County: Iredell
Location: THE ORCHARDS Subdivision Lot #7

Source of Wastewater Flow: 4 Bedroom Single Family Residence
Estimated Daily Wastewater Production: 480 gpd
System Flow: 26.96538462

Design Specifications

Drainfield Size: 285
Loading Rate: 0.3 gpd/ft.^{2}
Depth of Gravel in Trench: NA (PPBPS)
Gravel Size: NA (PPBPS)
Trench Depth: 36 in.
Trench Width: 36 in.
Septic Tank Size: 1000
Pump Tank Size: 1000

Estimated Supply Line Length: 49
Supply Line Diameter: 2 in. SCH 40 PVC
Supply Line Volume: 8.53
Dosing Volume: 158.64
Supply Manifold: N/A
Supply Manifold Length: N/A
Supply Manifold Volume: N/A

Recommended Float Controls: SJE Sensor Float Control Switches as Required for Control Panel or County Approved Equivalents
Recommended Control Panel: SJE-Rhombus Model 112 (NEMA 4x) Control Panel or County Approved Control Panel.

Pressure Head: 2 ft.
Friction Head: 0.87
Elevation Head: 11.90
Total Dynamic Head: 16.99

Threaded Union: In Tank
Gate Valves: 1 in Tank
1 per lateral (4)
Check Valves: In Tank
Anti-Siphon Hole: NA
Additional Comments: Soil suitability was performed by Rollans Soil & Environmental Services

THE ORCHARDS Subdivision Lot #7
LP PPBPS

DESIGN FLOW:	480
SOIL APPLICATION RATE:	0.3 gpd/ft.2
TOTAL AREA TRENCH BOTTOM:	855
TOTAL LATERAL LENGTH:	285
NUMBER OF FIELDS:	1
LATERAL LENGTH REQUIRED PER FIELD:	266.6666667
SUPPLY LINE LENGTH:	49
TOTAL DYNAMIC HEAD:	16.99
MANIFOLD SIZE:	N/A
DOSING VOLUME:	158.64
PUMP TANK DRAW DOWN*:	7.6
SEPTIC TANK SIZE:	1000
PUMP TANK SIZE:	1000

**Pump tank draw down based on a volume basis of 21 gallons per inch. Draw down may vary among pump tank manufacturers.*

THE ORCHARDS LOT 7

Project #: 01-1195

LAYOUT FOR 4 BEDROOM HOME

August 7, 2006

LINE #	FLAG COLOR	BS	HI	FS	ELEVATION	FLAGGED LINE LENGTH	DESIGN LINE LENGTH
TBM		10.4			100.00		
INSTR. 1			110.40				
HOUSE CNR				1.50	108.90		
P. TANK				5.70	104.70		
1	PINK			3.90	106.50	61	61
2	RED			5.00	105.40	60	60
3	ORANGE			6.00	104.40	75	75
4	BLUE			7.40	103.00	87	87
5	PINK			9.00	101.40	97	97
6	***RED***			***10.50***	***99.90***	***105***	***100***
7	***ORANGE***			***11.30***	***99.10***	***85***	***85***
8	***BLUE***			***13.00***	***97.40***	***60***	***60***
9	***PINK***			***14.10***	***96.30***	***43***	***40***
					Total	673	665

	LINE LENGTH	LTAR GPD/FT2	SYSTEM TYPE	SOIL LTAR GPD/FT2	TRENCH SYSTEM	DISTRIBUTION
****System***	***285***	***0.3***	***MOD.***	***0.30***	***PPBPS***	***LOW PRESSURE***
Repair	380	0.25	MOD.	0.25	PPBPS	LOW PRESSURE

Notes:

** TBM located top of ground at EIP at corner of lot (see site plan)

**TBM is assumed to be 100'

**All measures in feet

**Nitrification lines are demonstrated on contour via colored pin flags

**BS, HI, and FS indicate rod readings


LP PPBPS TAPSHEET -THE ORCHARDS LOT 7

SYSTEM

Line #	Color	Elevation	Length	Hole Size	Flow/hole	Trench Area	Number of Panels
6	***RED***	99.9	***100***	0.156	**0.41**	300	23
7	***ORANGE***	99.1	***85***	0.156	**0.41**	255	20
8	***BLUE***	97.4	***60***	0.156	**0.41**	180	14
9	***PINK***	96.3	***40***	0.156	**0.41**	120	9

total	**feet =**	**285**	**gal/min =**	**26.965385**
		Des. Flow	**480**
		Pump Run=	**5.88**
		soil LTAR	**0.3**
		LTAR +5%	**0.315**
		LTAR with mod.	**0.27**
		LTAR with mod.. + 5%	**0.2835**

.156 equals 5/32 inch hole

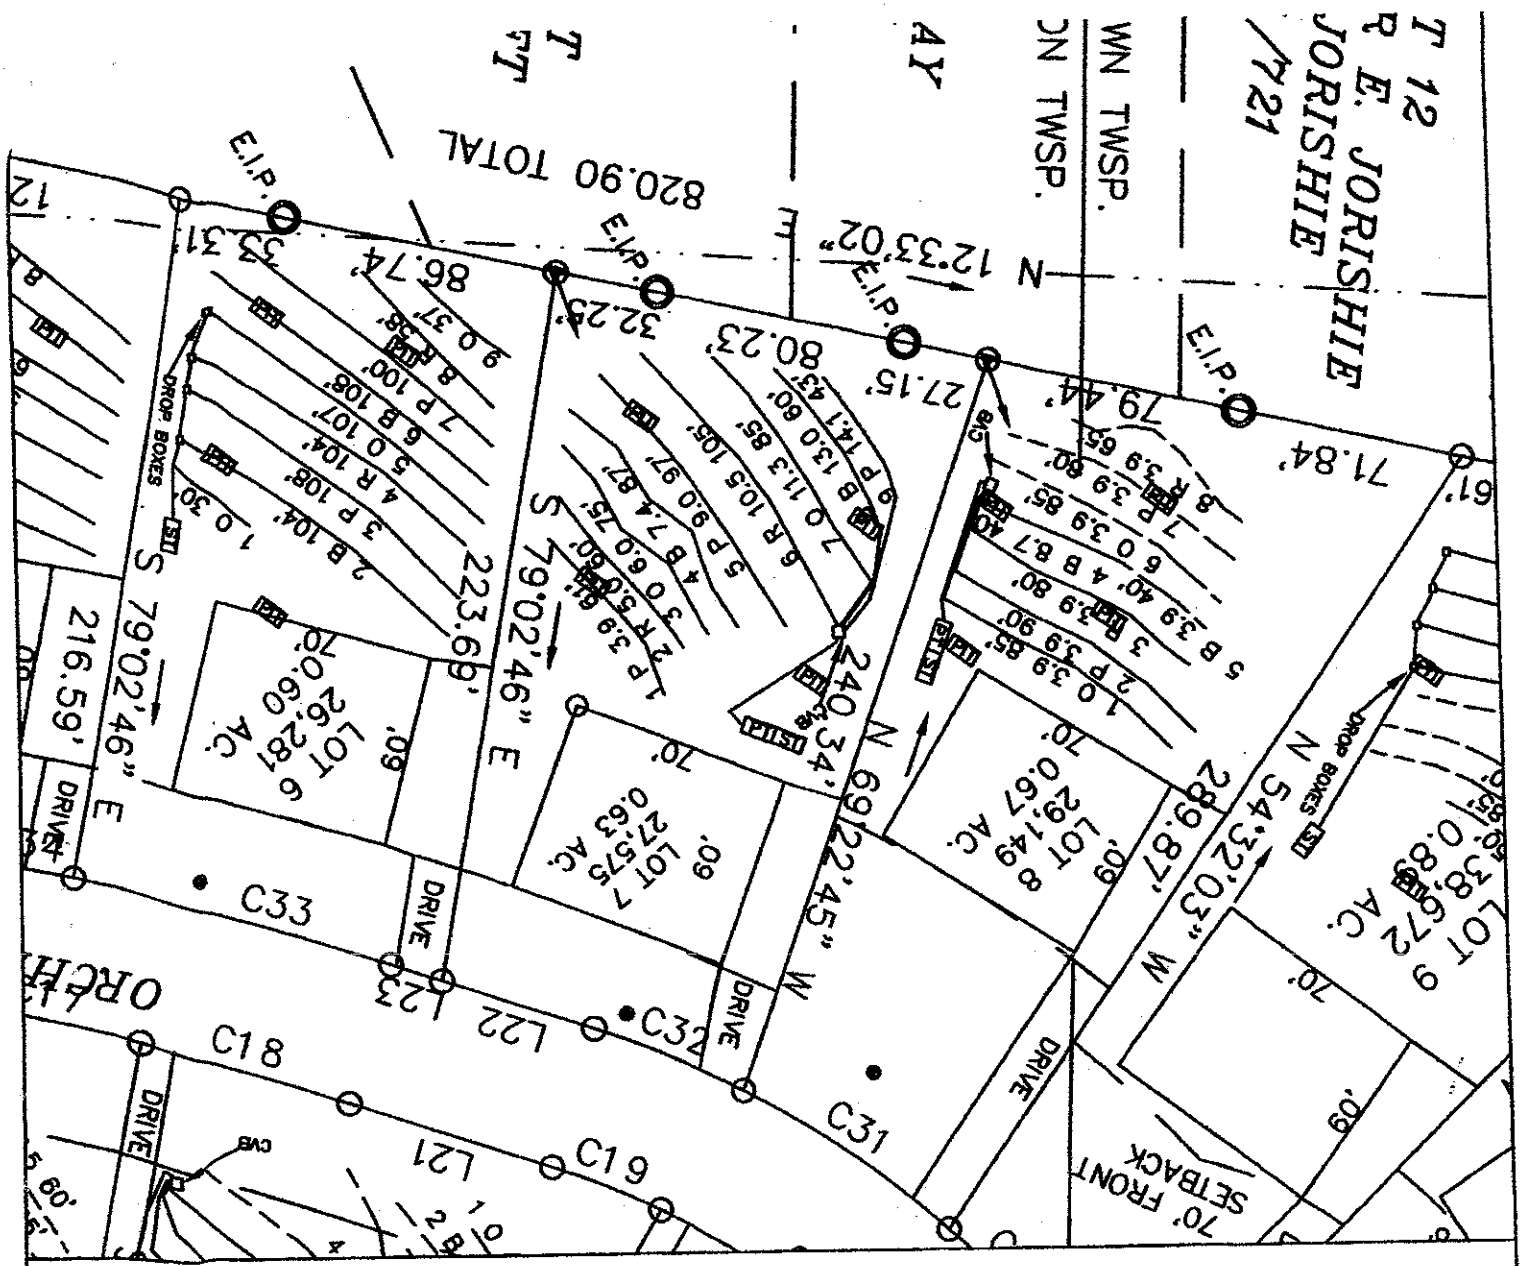

Lee
EASTER
704
201-
6465

ROLLANS SOIL & ENVIRONMENTAL SERVICES
2120 GRAHAM ROAD
MOUNT ULLA, NC 2815
PHONE/FAX: (704) 291-0989
ASHLEY ROLLANS, NC LICENSED SOIL SCIENTIST
MOBILE: (704) 736-5016
EMAIL: ROLLANSSOILS@AOL.COM

MAP TITLE: SITE PLAN & DRAINFIELD AREAS
PROJECT NAME: THE ORCHARD LLC / THE ORCHARD
LOCATION/DATE: PENN ROAD, MYRTLE GROVE, NORTH CAROLINA, JANUARY 2005

JOB #: 01-1165
FILE: C:\JOBS\01-1165
PROJECT MGR.: CSF
FIELD WORK: CSF
DRAWN BY: CSF

CALCULATIONS

Location THE ORCHARDS

Project Number 01-1195

Lot No: Lot 7

No. of Bedrooms	4	
Design Flow	480	$^{gal}/_{day}$
LTAR	0.3	gpd/ft2
PPBPS? (YES OR NO)	YES	
Supply Line Length	49	ft.
Supply Line Volume	8.526	gal.
Required Feet of Line	266.6667	ft.
Amount of Line from Layout	285	ft.
Gallons per Minute	26.96538	$^{gal}/_{min}$
Required Septic Tank Capacity	1000	gal.
Minimum Standard Tank Size	1000	
Panel Volume	3.6	gal.
# of Panels	66	
Dosing Volume	158.64	gal.

Note: Dosing Volume based on 33% of # of panels times 3.6 gal/panel

Tank Draw Down	7.6	*Generic Draw Down of 21 gal.per in.*
Pump Run Time	5.88	minutes
Elevation Head	11.9	ft.
Pressure Head	2	ft.
Friction Factor	1.78	ft./100 ft. *(From the interpolater.)*
Friction Head	0.87	ft.
Total Dynamic Head (+15%)	16.99	ft.

FRICTION FACTOR INTERPOLATER
2" SCH 40 PVC

GPM	*f*
20	0.84
	-0.88
25	1.27
	-1.28
30	1.78
	-1.76
35	2.37
	-2.25
40	3.03
43.07	3.48
45	3.77
48.14	4.28
50	4.58
57.11	5.89
60	6.42