
4 Bdrm

Acknowledgement Of
Plans Submittal ONLY
Date 4/11/07
Date 4-11-07

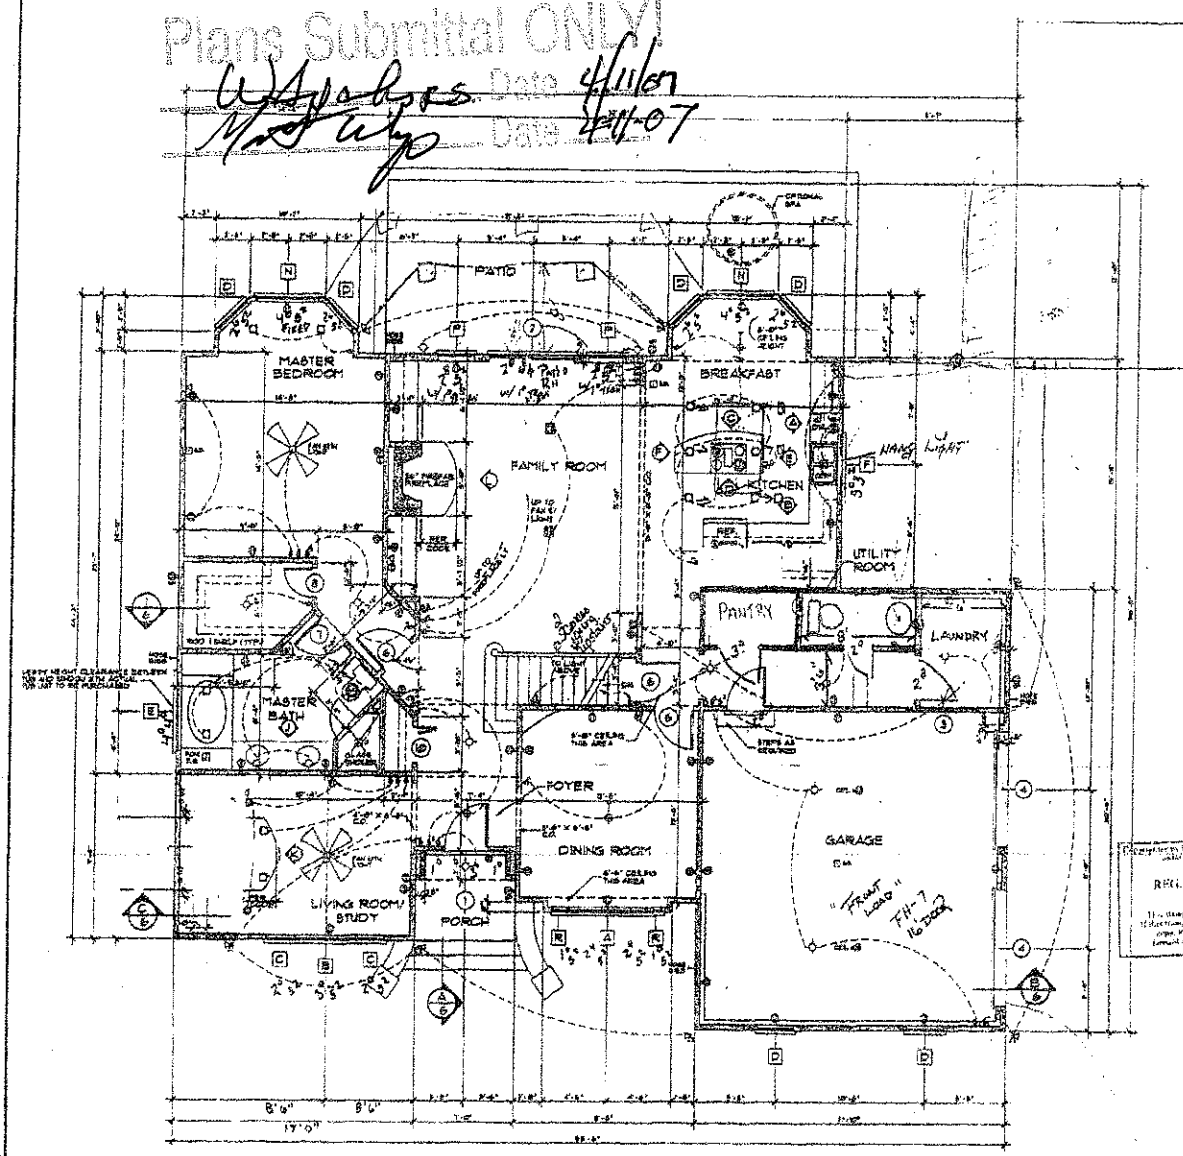

FIRST FLOOR PLAN

DOOR SCHEDULE

MARK	SIZE	DESCRIPTION	QUAN
1	3'-0" X 6'-8" X 1 3/4"	EXT. MAHOGANY W/ 1/2" GLASS, 1 PANEL	
2	2'-8" X 6'-8" X 1 3/4"	EXT. MAHOGANY FRENCH, 6 PANES EA. 12" FRAME	
3	2'-0" X 6'-8" X 1 3/4"	EXT. MAHOGANY	
4	16'-0" X 6'-8"	GARAGE DOOR	
5	2'-8" X 6'-8" X 1 3/4"	EXT. MAHOGANY, FIRE RATED	
6	2'-8" X 6'-8" X 1 3/8"	INTERIOR MAHOGANY	
7	2'-6" X 6'-8" X 1 3/8"	INTERIOR MAHOGANY	
8	2'-4" X 6'-8" X 1 3/8"	INTERIOR MAHOGANY	
9	2'-0" X 6'-8" X 1 3/8"	INTERIOR BIFOLD	
10	2'-6" X 6'-8" X 1 3/8"	INTERIOR BIFOLD	

* SEE FRONT ELEVATION FOR TRANSOM

WINDOW SCHEDULE

MARK	SIZE	QUAN.	DESCRIPTION
A	10'-0" X 5'-0"	1	DH WITH 5" TRANSOM *
B	4'-0" X 6'-0"	1	FIXED WITH ARCH TRANSOM *
C	7'-0" X 5'-0"	1	DH WITH PARTIAL ARCH TRANSOM *
D	5'-0" X 5'-0"	2	CSM
E	3'-0" X 5'-0"	1	FIXED
F	10'-0" X 5'-0"	1	CASEMENT
G	5'-0" X 5'-0"	1	DH
H	3'-0" X 5'-0"	1	FIXED WITH SINGLE HEAD *
I	4'-0" X 5'-0"	1	CASEMENT
J	3'-0" X 5'-0"	1	FIXED WITH PARTIAL SINGLE HEAD *
K	10'-0" X 5'-0"	1	CASEMENT
L	6'-0" (MINIMUM)	1	FIXED SINGLE HEAD *
M	3'-0" X 5'-0"	1	FIXED
N	3'-0" X 5'-0"	1	DH WITH 5" TRANSOM *
O	7'-0" X 5'-0"	1	FIXED WITH PARTIAL ARCH TRANSOM *
P	2'-0" X 5'-0"	1	FIXED WITH 5" TRANSOM *

ALL WINDOWS ARE INSULATED AND TEMPERED/SAFETY.
VERIFY LOCAL CODES REGARDING WINDOW REQUIREMENTS PRIOR TO CONSTRUCTION.
VERIFY WINDOW MODEL NUMBERS AND SIZES WITH MANUFACTURER BEFORE ORDERING CONSTRUCTION.
* SEE BUILDERS ELEVATIONS.
** VERIFY SKYLIGHT INSTALLATION REQUIREMENTS BEFORE CONSTRUCTION. IF CURB INSTALLATION IS RECOMMENDED DUE TO CLIMATIC CONDITIONS, PROVIDE 12" HIGH INTERIOR READY OPENING SIZE 1'-4" WIDE.

ELECTRICAL LEGEND

SYMBOL	DESCRIPTION
	DUPLEX OUTLET (GROUNDED TYPE)
	WEATHER PROOF DUPLEX OUTLET
	WALL SWITCH CONTROLLED DUPLEX OUTLET
	ABOVE COUNTER LOCATION
	FLUSH FLOOR WALL SWITCH CONTROLLED DUPLEX OUTLET, DUAL VOLT LOCATION
	208 VOLT OUTLET OR CONNECTION
	TELEVISION ANTENNA / CABLE OUTLET
	TELEPHONE OUTLET LOCATION
	DOOR CHIME LOCATION
	20 VOLT ARMITRON BOX
	SINGLE POLE WALL SWITCH
	SINGLE POLE WALL SWITCH WITH DIMMER
	3-WAY WALL SWITCH
	4-WAY WALL SWITCH WITH DIMMER
	CEILING MOUNTED LIGHT FIXTURE
	WALL BRACKET MOUNTED LIGHT FIXTURE
	RECESSED CEILING MOUNTED LIGHT FIXTURE
	RECESSED DIRECTIONAL CEILING LIGHT FIXTURE
	RECESSED CEILING LIGHT FIXTURE
	RECESSED LIGHT FOR WET AREA
	6'-0" LONG UNDER COUNTER FLUORESCENT LIGHT
	EXTERIOR CAST ALUMINUM FLOOD LIGHTS
	CEILING MOUNTED FAN - PADDLE
	CEILING MOUNTED FAN - BASKET
	CEILING MOUNTED FAN AND HEATER
	PORCELAIN LAMPHOLDER
	DOOR BELL BUTTON
	SMOKE DETECTOR
	CEILING MOUNTED FAN, LIGHT, AND HEATER


NOTE:
VERIFY ALL LOCAL CODES, ENERGY TYPES, AND SITE CONDITIONS PRIOR TO CONSTRUCTION. REVIEW SELECTED MECHANICAL SYSTEMS WITH OWNER PRIOR TO CONSTRUCTION. RECOMMENDED LOCATIONS ARE AS FOLLOWS:
THE WATER HEATER MAY TYPICALLY BE PLACED IN THE GARAGE OR IN THE CRAWL.
A/C UNIT MAY TYPICALLY BE PLACED IN THE BASEMENT FOR FIRST FLOOR AND IN THE ATTIC FOR THE SECOND FLOOR.
A/C UNIT MAY TYPICALLY BE PLACED IN THE GARAGE OR IN THE ATTIC SPACE.
DUCTWORK SHALL BE ACCOMPLISHED AS SHALL BE THE LARGEST PIECE OF EQUIPMENT AND IS NO CASE LESS THAN 12"x36".
SEE STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
INSULATE AROUND ALL BATHS AND UTILITY ROOM.
TYPICAL WALL STUDS 4'-0" O.C. UNLESS OTHERWISE DIMENSIONED.

DO NOT SCALE DRAWINGS.
COPYRIGHT © 6/25/96 ALL RIGHTS RESERVED BY DONALD A. GARDNER, ARCHITECTS, INC.
NOT TO BE COPIED OR REPRODUCED WITHOUT WRITTEN PERMISSION.


DONALD A. GARDNER
ARCHITECTS, INC.
P.O. BOX 2518 • GREENVILLE, S.C. • 29610
864 • 288 • 7540
www.dongardner.com

HEARTWOOD DESIGN

SCALE: 1/8"
SHEET 3 OF 5
FIRST FLOOR PLAN

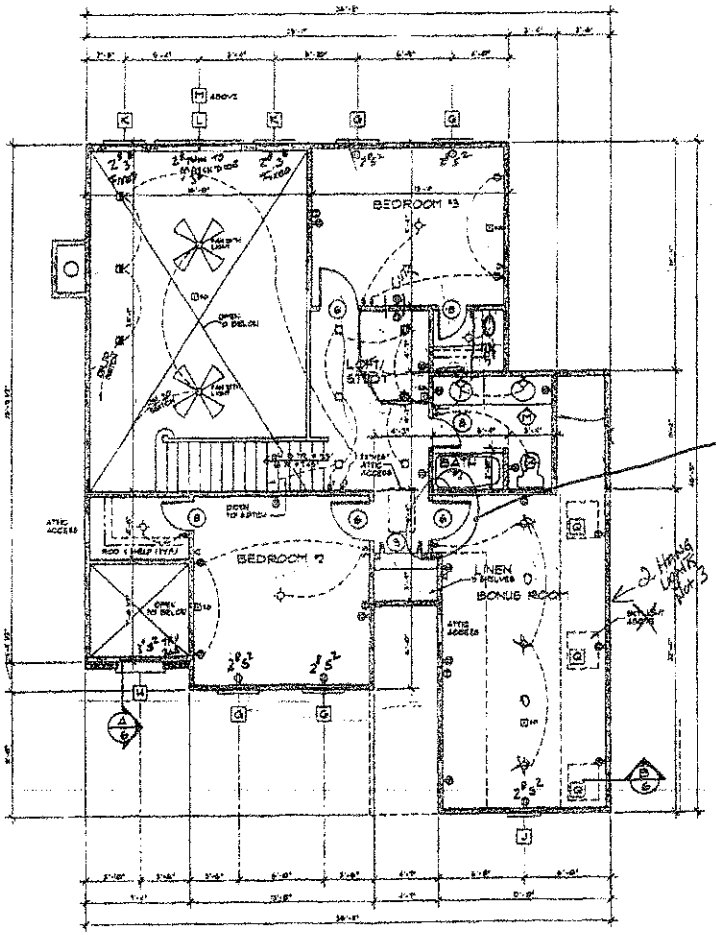


SECOND FLOOR PLAN

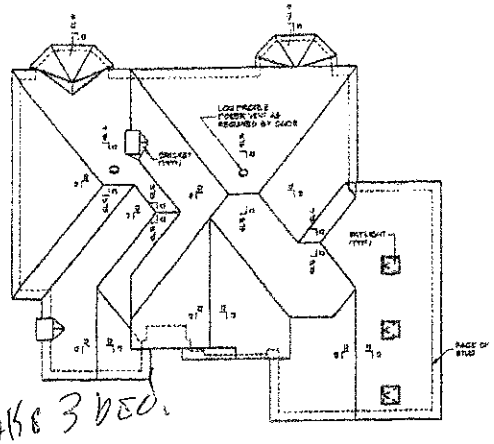

Arch to make 3 BED.
per wesley
Mark


ROOF PLAN

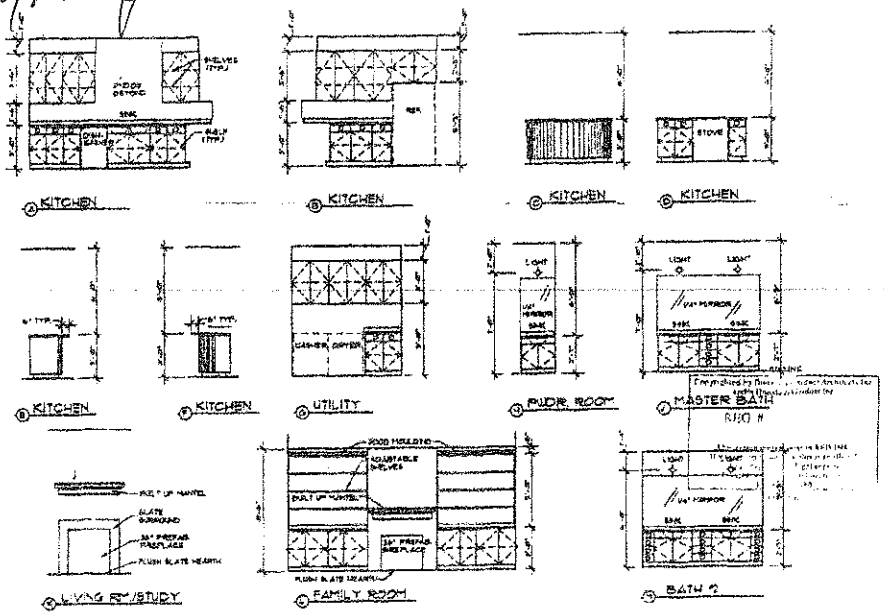


INTERIOR ELEVATIONS

DONALD A. GARDNER
ARCHITECTS, INC.
BOX 2617 • GREENVILLE N.C. • 27810
504 • 758 • 7560
www.donaldagardner.com


DONALD A. GARDNER
ARCHITECTS

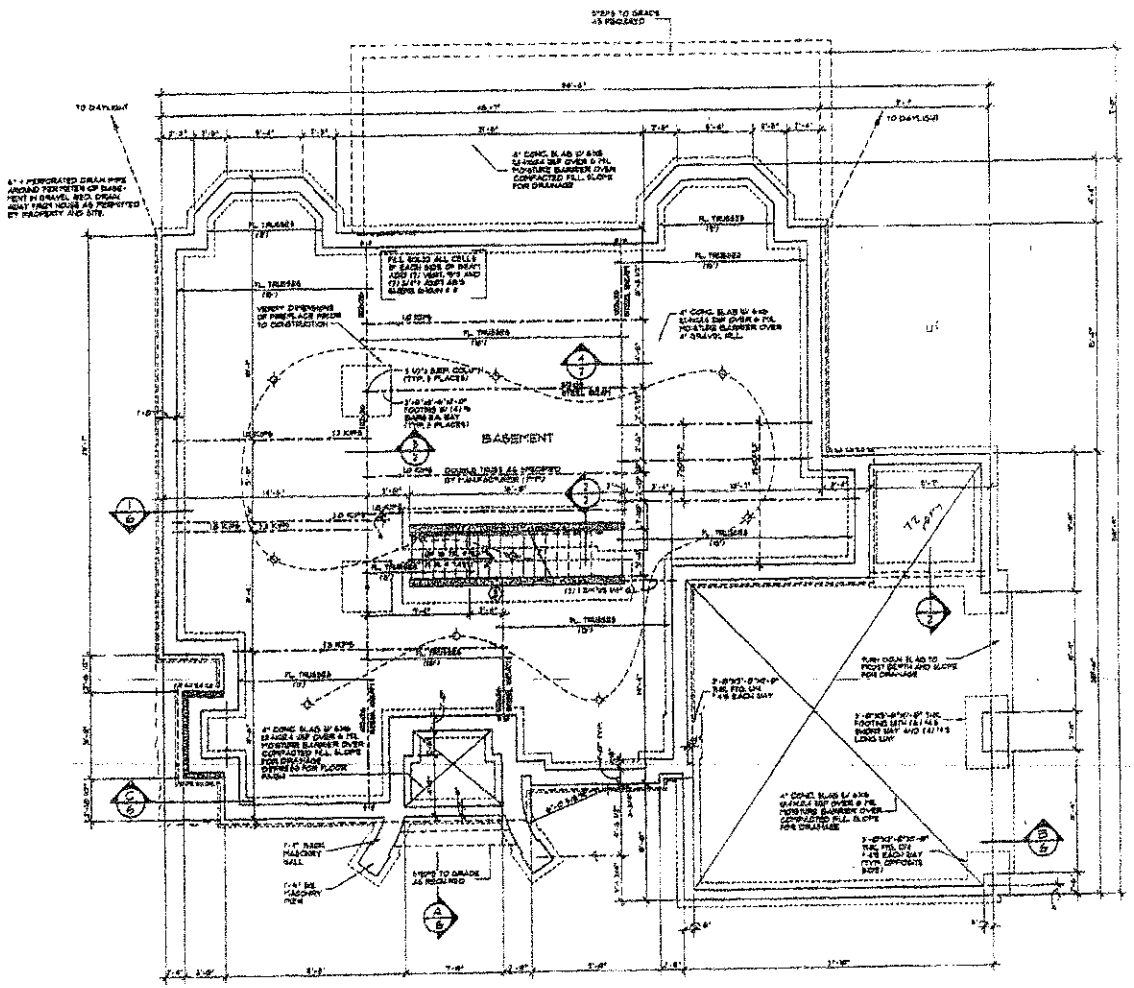


BASEMENT AND FIRST FLOOR FRAMING PLAN



DETAIL AT THICKENED SLAB




DETAIL AT THICKENED SLAB




SECTION


FOUNDATION LEGEND



SECTION



TYPICAL PIPE THRU FLOOR



COLUMN BASE PLATE DETAIL

GENERAL NOTES

1. ALL STRUCTURAL TIMBER, AND ALL LOCAL, DESIGNATED, REQUIRED (INCLUDING ALL DIMENSIONS AND SMALL TABLE REFERENCE TO ANY DESCRIPTION SHOWN ON THIS SHEET) SHALL BE SHOWN ON THIS SHEET.

BASEMENT

1. BASEMENT WALL CONSTRUCTION SHALL BE REINFORCED MASONRY OR REINFORCED CONCRETE, AS REQUIRED BY LOCAL CODES
2. FOR ELECTRICAL LAYOUT, SEE SHEET 4

CONSTRUCTION REQUIREMENTS

1. 1/2" (5/8") STRUCTURAL GRADE 'X' PLYWOOD SHEATHING
2. STAGGER ONLY ONE CORNER END AT ANY 90° JOINT
3. USE 8d NAILS 6" o/c ON EDGES AND 12" o/c ON FIELD
4. USE 8d NAILS 4" o/c EDGES, 8" o/c FIELD, ALL PLYWOOD EDGES AND BLOCKING, AT ALL INTERSECTIONS & SUPPORTS
5. PROVIDE BLOCKING BETWEEN FLOOR JOISTS AT 4'-0" INTERVALS.

FOUNDATION LEGEND

- DOUBLE TRUSS AS SPECIFIED BY MANUFACTURER (TYP.)
- 150 PLF — POUNDS PER LINEAR FOOT
- 18 KIPS — POINT LOAD, 1 kip = 1000 Lbs
- FL TRUSSES — 24" O.C. GREEN SQ. FLOOR TRUSSES UNLESS NOTED OTHERWISE SEE GENERAL NOTES
- 19'-0" — LENGTH OF TRUSS

STANDARD DESIGN SERIES
DONALD A. GARDNER ARCHITECTS, INC.
P.O. BOX 20178 - GREENVILLE SC - 29616
864 - 288 - 7550
www.dongardner.com

DESIGN NO. 262-A
SHEET 2 OF 4
FOUNDATION PLAN

© 1992 DONALD A. GARDNER ARCHITECTS, INC.
COPYRIGHT © 1992 DONALD A. GARDNER ARCHITECTS, INC.
NOT TO BE COPIED OR REPRODUCED WITHOUT WRITTEN PERMISSION