Acknowledgement Of
Plans Submittal ONLY!
Date 7/22/09
Date 7-22-09


FLOOR PLAN NOTES:

1) G.C. SHALL VERIFY ALL DIMENSIONS, SITE CONDITIONS AND HOUSE PLACEMENT PRIOR TO CONSTRUCTION.
2) G.C. ASSUMES ALL LIABILITY FOR ANY CHANGES TO THE PLAN NOT APPROVED BY THE ARCHITECT.
3) DIMENSIONS ON FLOOR PLANS ARE FROM FACE OF STUD ON EXTERIOR WALLS AND TO CENTER OF STUD ON INTERIOR WALLS, EXCEPT WHERE NOTED.
4) FIRST FLOOR CEILING HEIGHT IS 8'-0".
5) CABINET CONTRACTOR TO SUBMIT FOR REVIEW AND APPROVAL ALL CABINET DESIGNS.
6) FRAMING CONTRACTOR TO COORDINATE ALL FLOOR FINISHES WITH OWNER (IE: TILE/ HARDWARE/ CARPET ETC.)


WINDOW SCHEDULE		
	SIZE	DESCRIPTION
A	2'-6" X 4'-6"	DOUBLE HUNG W/ INSUL. GLASS PANELS
B	2'-8" X 4'-0"	DOUBLE HUNG W/ INSUL. GLASS PANELS -REPLACE EXISTING WINDOWS
C	(2) 2'-8" X 4'-6"	DOUBLE HUNG W/ INSUL. GLASS PANELS
D	2'-8" X 2'-6"	DOUBLE HUNG W/ INSUL. GLASS PANELS ABOVE SINK

DOOR SCHEDULE		
	SIZE	DESCRIPTION
1	3'-0" X 6'-8" X 1 1/2"	EXTERIOR THERMO TRU
2	2'-6" X 6'-8" X 1 1/2"	TWO PANEL HOLLOW CORE DOOR
3	2'-0" X 6'-8" X 1 1/2"	TWO PANEL HOLLOW CORE DOOR
4	3'-0" X 6'-8" X 1 1/2"	EXTERIOR THERMO TRU GLASS PANEL DOOR
5	9'-0" X 7'-0" X 1"	INSULATED OVERHEAD DOOR
6	3'-0" X 6'-8" X 1 1/2"	TWO PANEL HOLLOW CORE DOOR
7	3'-0" X 6'-8"	SCREEN DOOR

G.C. TO VERIFY WINDOWS AND DOORS W/ OWNER AND MAKE ANY COORDINATE ROUGH OPNG. SIZES NECESSARY. SPECS.

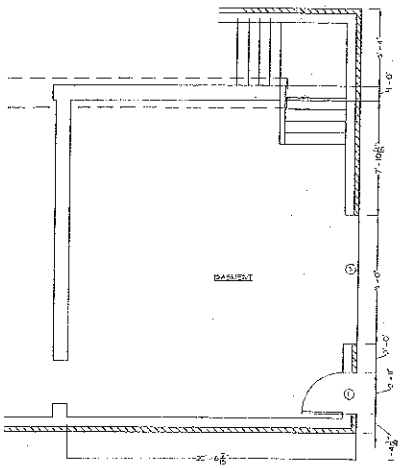

2 A1.2 BASEMENT PLAN 1/4"=1'-0"

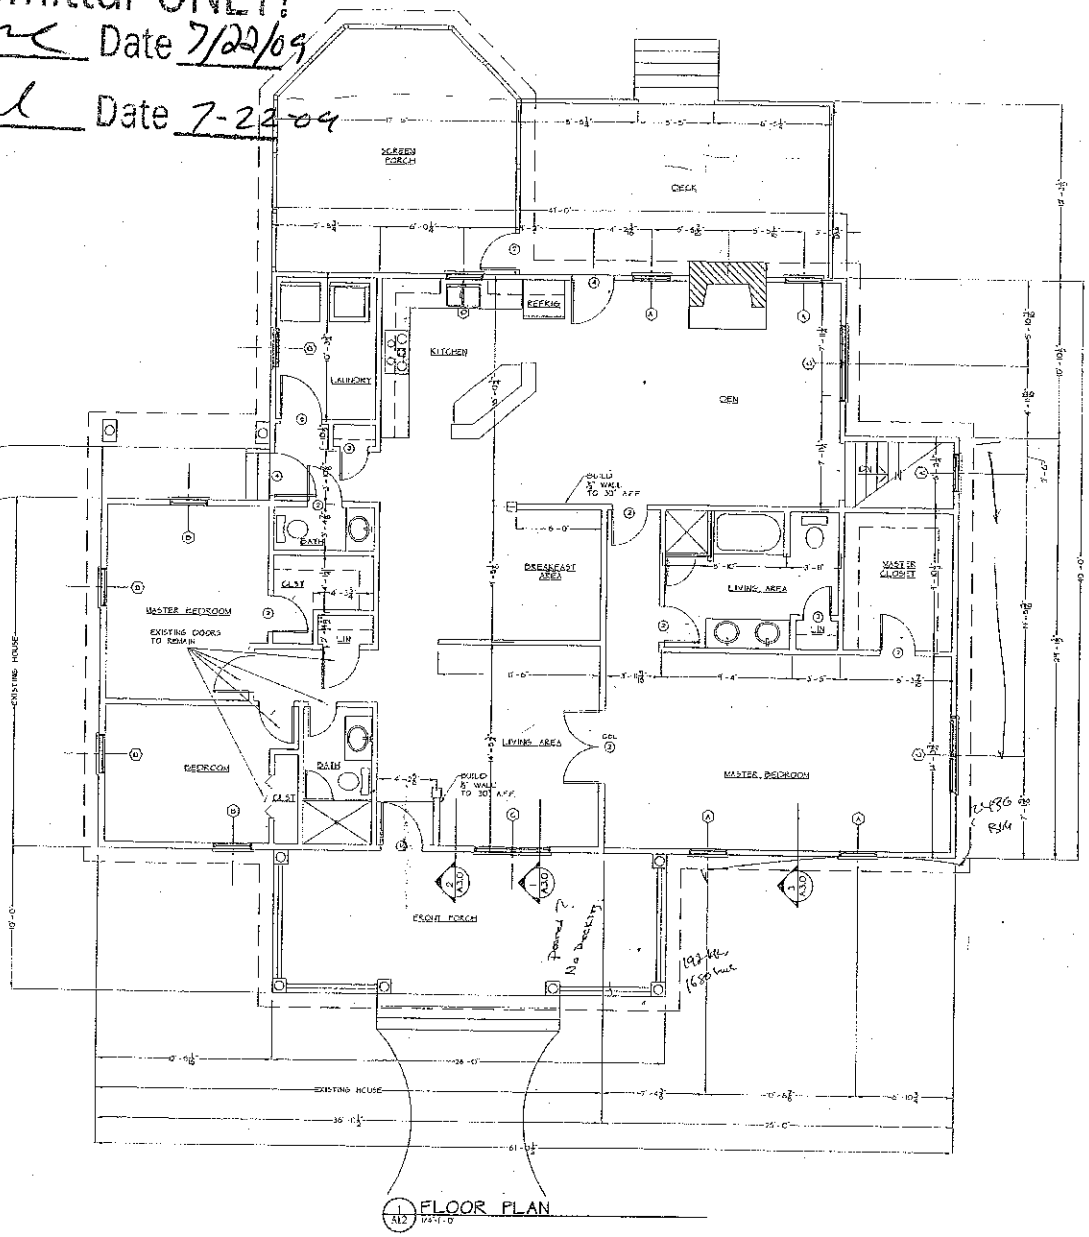

1 A1.2 FLOOR PLAN 1/4"=1'-0"

Design Studio 22
6412 Poplar Tent Road
Concord, NC 28027
(704) 795-2226

TOMMY & RENE MCLELLAND
MCLELLAND RESIDENCE
MOORESVILLE, NORTH CAROLINA

FLOOR PLAN

PROJECT NUMBER: 07-1207
RELEASED FOR: PERMIT / APPROVAL / PRICING / CONSTRUCTION
DATE: 5/14/09

A1.2
NO.