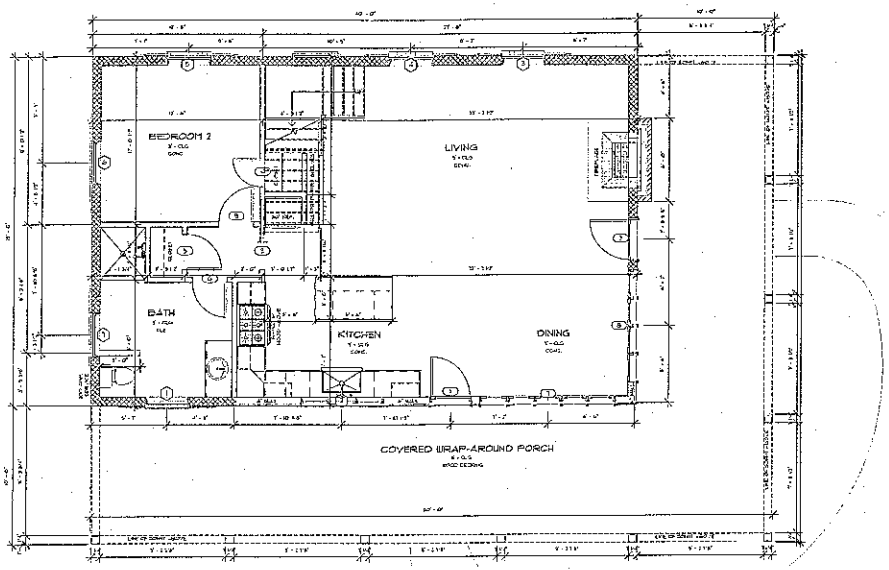


1 / A3 1ST FLOOR
1/4" = 1'-0"

DOOR & WINDOW NOTE

ALL WINDOW & DOOR SIZES ARE NOMINAL VERIFY ALL CONDITIONS W/ MANUFACTURER & CODE RESTRICTIONS

GENERAL FLOOR PLAN NOTES


1. SEE SHEET GN-1 FOR ADDITIONAL FRAMING NOTES.
2. ALL HEADERS ARE (2) 2X8 N.N.O.I
3. PROVIDE 1/2" DRYWALL SEPARATION BETWEEN WALLS OF GARAGE & HOUSE. PROVIDE 5/8" TYPE "X" DRYWALL SEPERATION ON CEILING OF GARAGE (TABLE R-302.6)
4. BUILD UP FLOOR AREAS AS REQUIRED TO HAVE FLUSH FLOOR FINISHES AT DIFFERENT MATERIALS - PER PLAN.
5. ALL ANGLES ARE 45 DEGREES (U.N.O.)
6. ALL INTERIOR DOORS ARE 6" FROM WALL UNLESS DIMENSIONED OTHERWISE)
7. INSTALL DBL. JOIST UNDER ALL PARALLEL PARTITION WALLS (U.N.O.)
8. INSTALL 4 MIN. OF (3) 2x4 STUDS UNDER ALL BEAMS, LVL's, ON BUILT-UP, AT THE FIRST FLOOR LEVEL. (U.N.O.)
9. ALL EXTERIOR WALLS TO HAVE 7/16" OSB SHEATHING FASTENED w/ 8d NAILS @ 6" o.c. AROUND EDGES & 12" o.c. IN FIELD
10. ALL EXTERIOR STUD WALLS TO BE 2x6's @ 16" o.c. (U.N.O.)
11. SEE STRUCTURAL SHEETS FOR ALL POINT LOADS, BEAMS, HEADERS, & JOIST LAYOUTS, (PER STRUCTURAL ENGINEER DRAWINGS)
12. U.N.O. = UNLESS NOTED OTHERWISE
13. FURR-DOWN CEILING IN SHOWER/TUB AREAS TO 80"

FIRST FLOOR DOOR SCHEDULE

	Width	Height	Comments
1	3' - 0"	7' - 0"	SINGLE - GLASS ENTRY
2	3' - 0"	7' - 0"	SINGLE - GLASS ENTRY
3	2' - 8"	7' - 0"	SINGLE - POCKET SLIDER
4	2' - 0"	5' - 0"	SINGLE - PANELED
5	2' - 6"	7' - 0"	SINGLE - PANELED
6	2' - 0"	7' - 0"	SINGLE - PANELED
7	2' - 0"	7' - 0"	DUAL - FIXED UNIT
8	2' - 0"	7' - 0"	QUAD. FIXED UNIT
9	2' - 0"	7' - 0"	SINGLE - PANELED

FIRST FLOOR WINDOW SCHEDULE

	Width	Height	Notes
1	3' - 0"	5' - 0"	EXISTING - CASEMENT
2	2' - 0"	3' - 5"	TRIPLE CASEMENT
3	3' - 0"	4' - 4"	EXISTING - CASEMENT
4	3' - 0"	4' - 4"	EXISTING - CASEMENT
5	3' - 0"	4' - 4"	EXISTING - CASEMENT
6	3' - 0"	4' - 4"	EXISTING - CASEMENT
7	3' - 0"	3' - 3"	EXISTING - CASEMENT

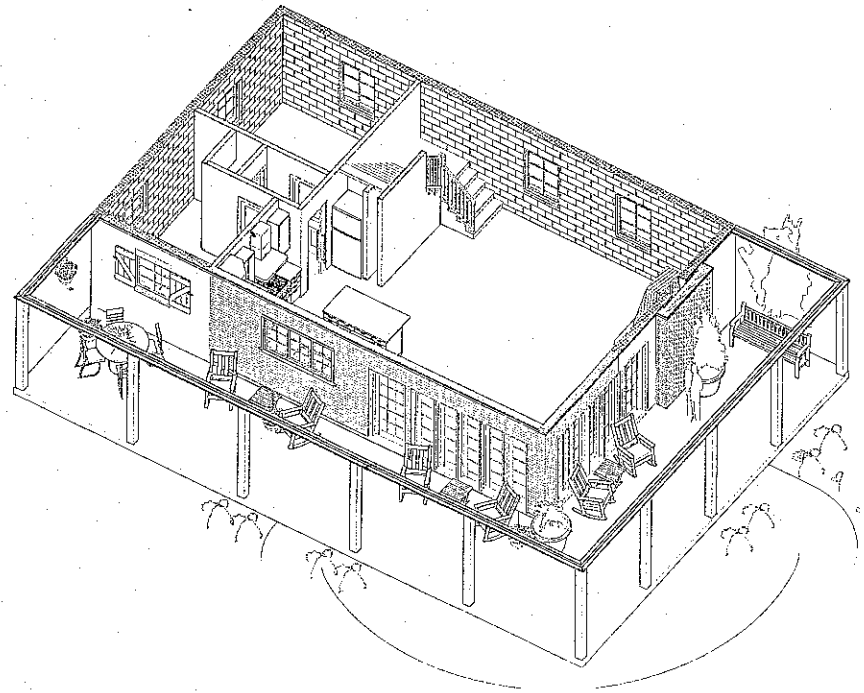

Acknowledgement Of Plans Submittal ONLY!

_____ Date_____


_____ Date 07/01/15

STAIR SPECS.

- 16 RISERS @ 7 1/2" EACH
- 15 TREADS @ 9" EACH w/ 1" NOSING

NOTE:
VERIFY ACTUAL CONDITIONS & FLOOR FINISH MATERIALS PRIOR TO STAIR FABRICATION

NOTE:
GUARD RAILS & HANDRAILS SHALL BE IN COMPLIANCE W/ 2012 INTER. BLDG. CODE



FIRST FLOOR TO SECOND FLOOR STAIR DETAIL

STAIR SPECS.


BUILDER


PROJECT:
CABIN
IN
STATESVILLE, NORTH CAROLINA
NOTE: GENERAL CONTRACTOR TO VERIFY ALL DIMENSIONS AND ANGLES IN FIELD.

SMITH SLOVIK DESIGN GROUP
2130 HAWKINS STREET
SUITE C
CHARLOTTE, N.C. 28203
TROY S. SMITH
704.641.2544
DAVE SLOVIK
704.560.9919

DATE: FEBRUARY 18, 2015
JOB NUMBER: III - 2014 - YCC
REVISIONS: CABIN

SHEET A3

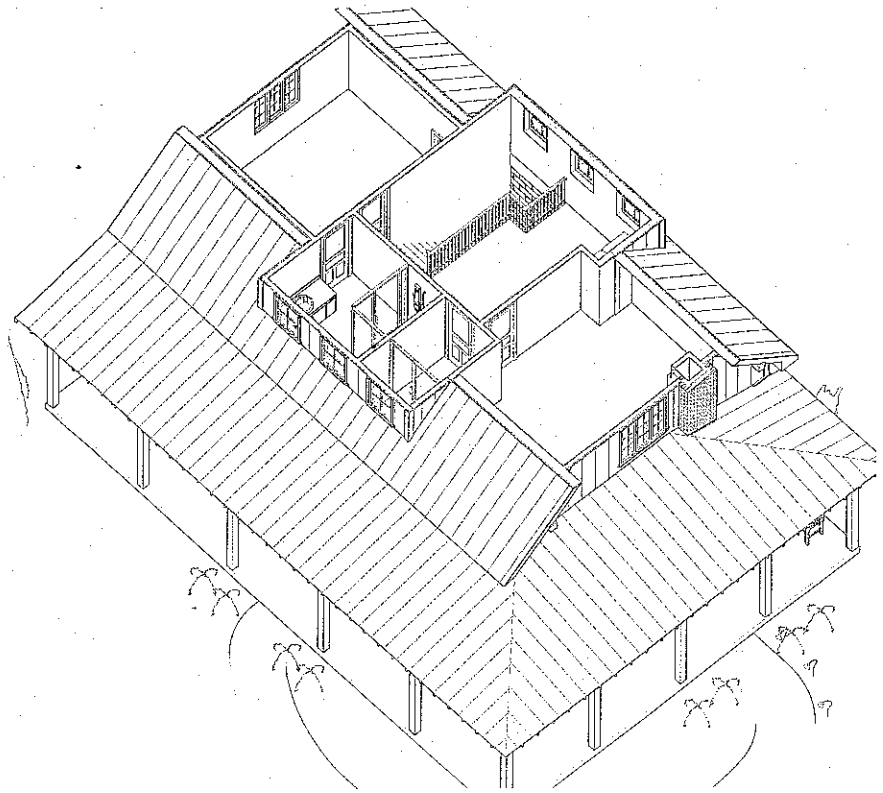

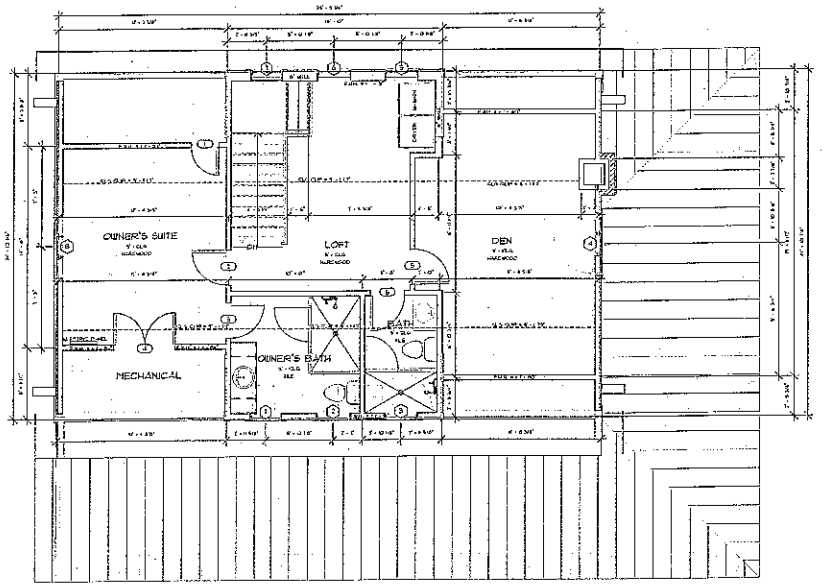

1 / A4 2ND FLOOR
1/4" = 1'-0"

DOOR + WINDOW NOTE

ALL WINDOW + DOOR SIZES ARE NOMINAL VERIFY ALL CONDITIONS W/ MANUFACTURER + CODE RESTRICTIONS

1. SEE SHEET A01 FOR ADDITIONAL FRAMING NOTES.

2. TYPE "X" DRYWALL SEPARATION OR CEILING OF GARAGE (TABLE R-302.6)

3. BUILD UP FLOOR AREAS AS REQUIRED TO ACHIEVE FLUSH FLOOR FINISHES AT DIFFERENT MATERIALS

4. ALL ANGLES ARE 90 DEGREES (U.N.O.)

5. ALL INTERIOR DOORS ARE 6" FROM WALL UNLESS DIMENSIONED OTHERWISE

6. INSTALL 1/2" GYP. BD. ON ALL PARTY WALLS

7. INSTALL 2 ea. 2x CRIPPLE STUDS UNDER ALL BEAMS, LVL'S, OR BUILT-UP, AT THE FIRST FLOOR LEVEL (U.N.O.)

8. INSTALL 2 ea. 2x CRIPPLE STUDS UNDER ALL BEAMS, LVL'S, OR BUILT-UP, AT THE FIRST FLOOR LEVEL (U.N.O.)

9. ALL EXTERIOR WALLS TO HAVE 7/16" OSB SHEATHING FASTENED W/ 8d NAILS 4 @" o.c. AROUND EDGES + 12" o.c. IN FIELD

10. ALL EXTERIOR 2X6 WALLS TO BE 2x6's @ 16" o.c. (U.N.O.)

11. SEE STRUCTURAL SHEETS FOR ALL POINT LOADS, BEAMS, HEADERS, + JOIST LAYOUT, WHEN STRUCTURAL ENGINEER DRAWINGS ARE

12. U.N.O. = UNLESS NOTED OTHERWISE

13. FURR-DOWN CEILING IN SHOWER/TUB AREAS TO 72"

Acknowledgement Of Plans Submittal ONLY!

Date

Date 6-10-15

SECOND FLOOR DOOR SCHEDULE

	Width	Height	Comments
1	7' - 0"	7' - 0"	DOUBLE FRENCH DOOR W/ SIDELITES AND TRANSOM ABOVE
2	3' - 0"	7' - 0"	SINGLE - PANELED
3	2' - 8"	7' - 0"	SINGLE - PANELED
4	2' - 8"	7' - 0"	TWIN - PANELED
5	2' - 8"	7' - 0"	SINGLE - PANELED
6	2' - 6"	7' - 0"	SINGLE - PANELED

SECOND FLOOR WINDOW SCHEDULE

	Width	Height	Notes
1	2' - 6"	3' - 0"	SINGLE + TRANSOM
2	3' - 6"	3' - 0"	SINGLE + TRANSOM
3	2' - 6"	3' - 0"	SINGLE + TRANSOM
4	1' - 6"	2' - 0"	TRIPLE - CASEMENT
5	2' - 6"	3' - 0"	SINGLE + TRANSOM
6	2' - 6"	3' - 0"	SINGLE + TRANSOM
7	2' - 6"	3' - 0"	SINGLE + TRANSOM
8	1' - 6"	2' - 0"	TRIPLE - CASEMENT

BUILDER:

PROJECT:
CABIN
IN
STATESVILLE, NORTH CAROLINA

NOTE: CONTRACTOR TO VERIFY ALL DIMENSIONS AND ANGLES IN FIELD.

SMITH SLOVIK DESIGN GROUP
2170 HAWKINS STREET
SUITE C
CHARLOTTE, NC. 28203
TROY S. SMITH
704.641.2344
DAVE SLOVIK
704.360.9919

DATE: FEBRUARY 18, 2015
JOB NUMBER: III - 2014 - VCC CABIN
REVISIONS:

SHEET
A4
OF