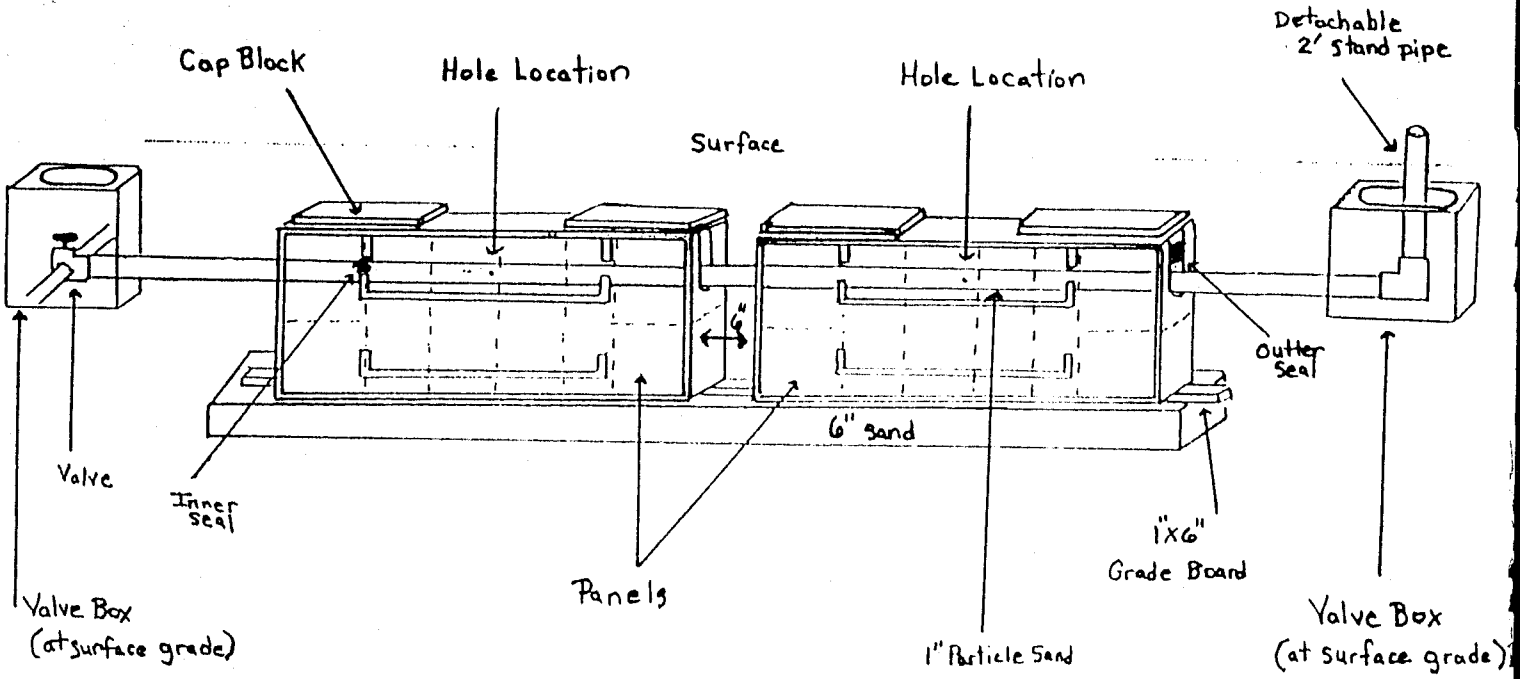


WILDLIFE BAY II LOT 99, 99A
PIN # 4639-73-4550
PD # 077025

Pressure Dosed PPBPS

# of panels 62.
Size holes 5/32". 1 hole per panel.
Approximate amount of sand needed 45 TONS.
100 lbs. of partical sand per 8 panels.
Sidewalls rated and limed.
GPM 26.
TDH 73.

Comments

Note: Each line shall have a globe valve at the start of the line for pressure adjustment. Valves shall be grouped and placed in a valve box with a lid at ground level. Turn ups shall also be capped with threaded fittings and brought to ground level and covered with a plastic cup with cover. Valves and turn ups shall be marked as to the ones that go together.