
5/8"	D/H	5	WOOD SINGLE	SOUTHLAND			
			WOOD SINGLE	SOUTHLAND			

						REMARKS	PROVIDED BY
1	3'-0" x 6'-8"	3'-2" x 6'-10 1/2"	EXT	1	FIBERGLASS 2-PANEL/9 LITE-LI	SOUTHLAND
2	3'-0" X 6'-8"	3'-2" x 6'-10 1/2"	EXT	2	FIBERGLASS FULL VIEW(FIXED)	SOUTHLAND
3	6'-0" x 6'-8"	6'-0 1/2" x 6'-10 3/8"	EXT	3	6068 WOOD ROLLING FRENCH	SOUTHLAND

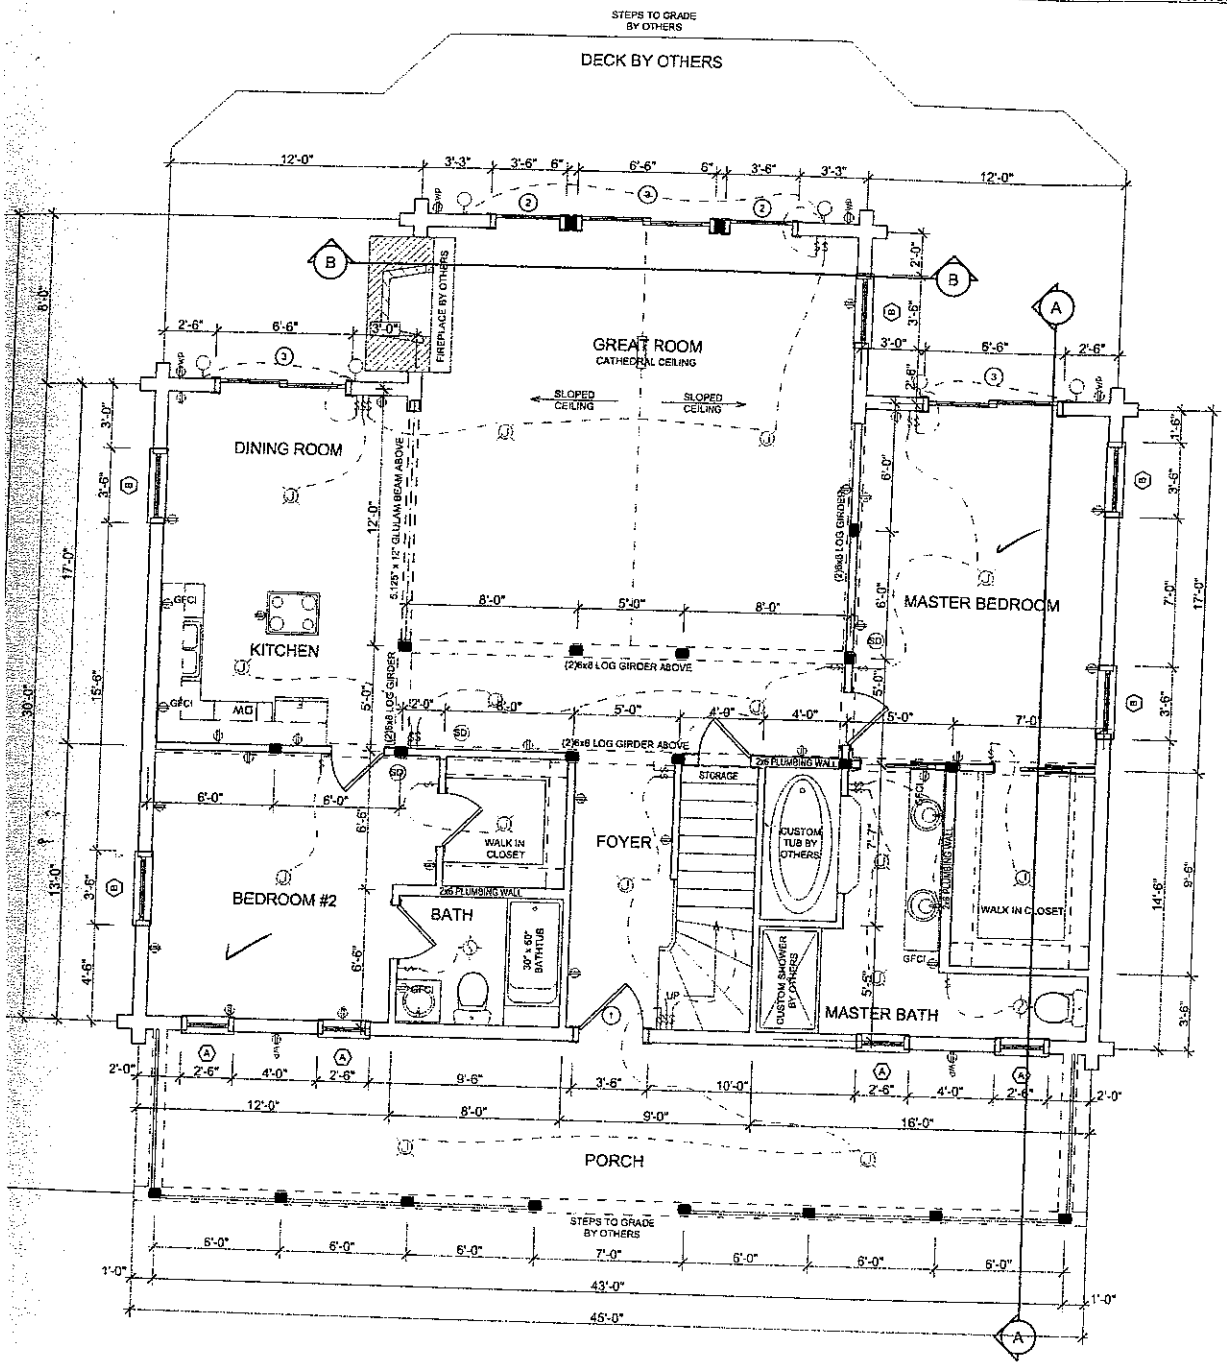

FIRST FLOOR PLAN

1/4" = 1'

SQUARE FOOTAGE (ANSI Z765-1996)	
HEATED AREA:	
FIRST FLOOR	1570 SQ. FT.
SECOND FLOOR	1150 SQ. FT.
TOTAL HEATED	2720 SQ. FT.
UNHEATED AREA:	
PORCH	350 SQ. FT.
TOTAL UNHEATED	350 SQ. FT.
TOTAL UNDER ROOF	3070 SQ. FT.

STAIR TO 2nd FLOOR:

FLOOR/FLOOR = 8'-6 3/4"
14 RISERS @ +/- 7 5/16"
13 TREADS @ 10" MIN.

NOTE: SUNDRY ITEMS ARE INCLUDED IN THIS PACKAGE

NOTE:

1) SMOKE DETECTORS SHALL RECEIVE PRIMARY POWER FROM BUILDING ELECTRICAL SYSTEM AND SHALL BE EQUIPPED WITH BATTERY BACKUP. DETECTORS SHALL EMIT LOW BATTERY SIGNAL.

2) UNLESS NOTED OTHERWISE, ALL INTERIOR STUD WALLS ARE NON-LOAD BEARING. FLOOR SYSTEM DESIGN BASED ON SELF-SUPPORTING ROOF. ROOF LOADS TO BE CARRIED ON LOG WALLS OR INTERIOR SUPPORT BEAMS.

3) FLOOR LOADS ARE BASED ON A LIVE LOAD OF:
30 PSF, L/A = 360 IN SLEEPING AREAS
40 PSF, L/A = 360 IN LIVING AREAS
PER 2000 IRC/ CABO ONE & TWO FAMILY CODE.

4) UNLESS OTHERWISE NOTED, ROOF LOADS ARE DESIGNED FOR 30 PSF LIVE LOAD AND 15 PSF DEAD LOAD.

KEY:

- INTERIOR WALL
- LOG WALL
- HANDRAILS & PICKETS (BY OTHERS)
- 6X8 LOG POSTS (REFER TO CONTRACT)
- 6X8 LOG LINTEL (REFER TO CONTRACT)
- TOILET (BY OTHERS)
- BIDET (BY OTHERS)
- CEILING FAN W/ LIGHT (BY OTHERS)
- JUNCTION BOX (BY OTHERS)
- LIGHT (BY OTHERS)
- VENT FAN W/ LIGHT (BY OTHERS)
- SD — SMOKE DETECTOR (BY OTHERS)
- SWITCH (BY OTHERS)
- 220v OUTLET (BY OTHERS)
- 110v OUTLET (BY OTHERS)
- WP — WATERPROOF OUTLET (BY OTHERS)
- GFCI — GROUND FAULT OUTLET (BY OTHERS)

NOTE:


CONTRACTOR TO VERIFY ALL DIMENSIONS BEFORE BEGINNING CONSTRUCTION.

REFER TO SOUTHLAND LOG HOMES' CONSTRUCTION MANUAL FOR FURTHER INSTRUCTIONS.

REV
COU
DELIVE
MODEL
LOG ST
LOG PR
SCALE:
DESIGNI
CHECKE

Acknowledgement Of
Plans Submittal ONLY!
Christopher M. Shenk Date 3-5-04
Matthew E. Date

WINDOW SCHEDULE						Created at 1:08 PM 03/06/02
MARK	SIZE	ROUGH OPENING	TYPE	QTY	REMARKS	PROVIDED BY
B	3'-0" x 4'-6"	3'-2" X 4'-9 5/8"	D/H	2	WOOD SINGLE	SOUTHLAND
C	3'-0" x 3'-10"	3'-2" x 4'-1 5/8"	D/H	2	WOOD SINGLE	SOUTHLAND
D	VARIES	OWNER TO VERIFY	FIXED	4	CUSTOM(CUT ON SITE)	OWNER

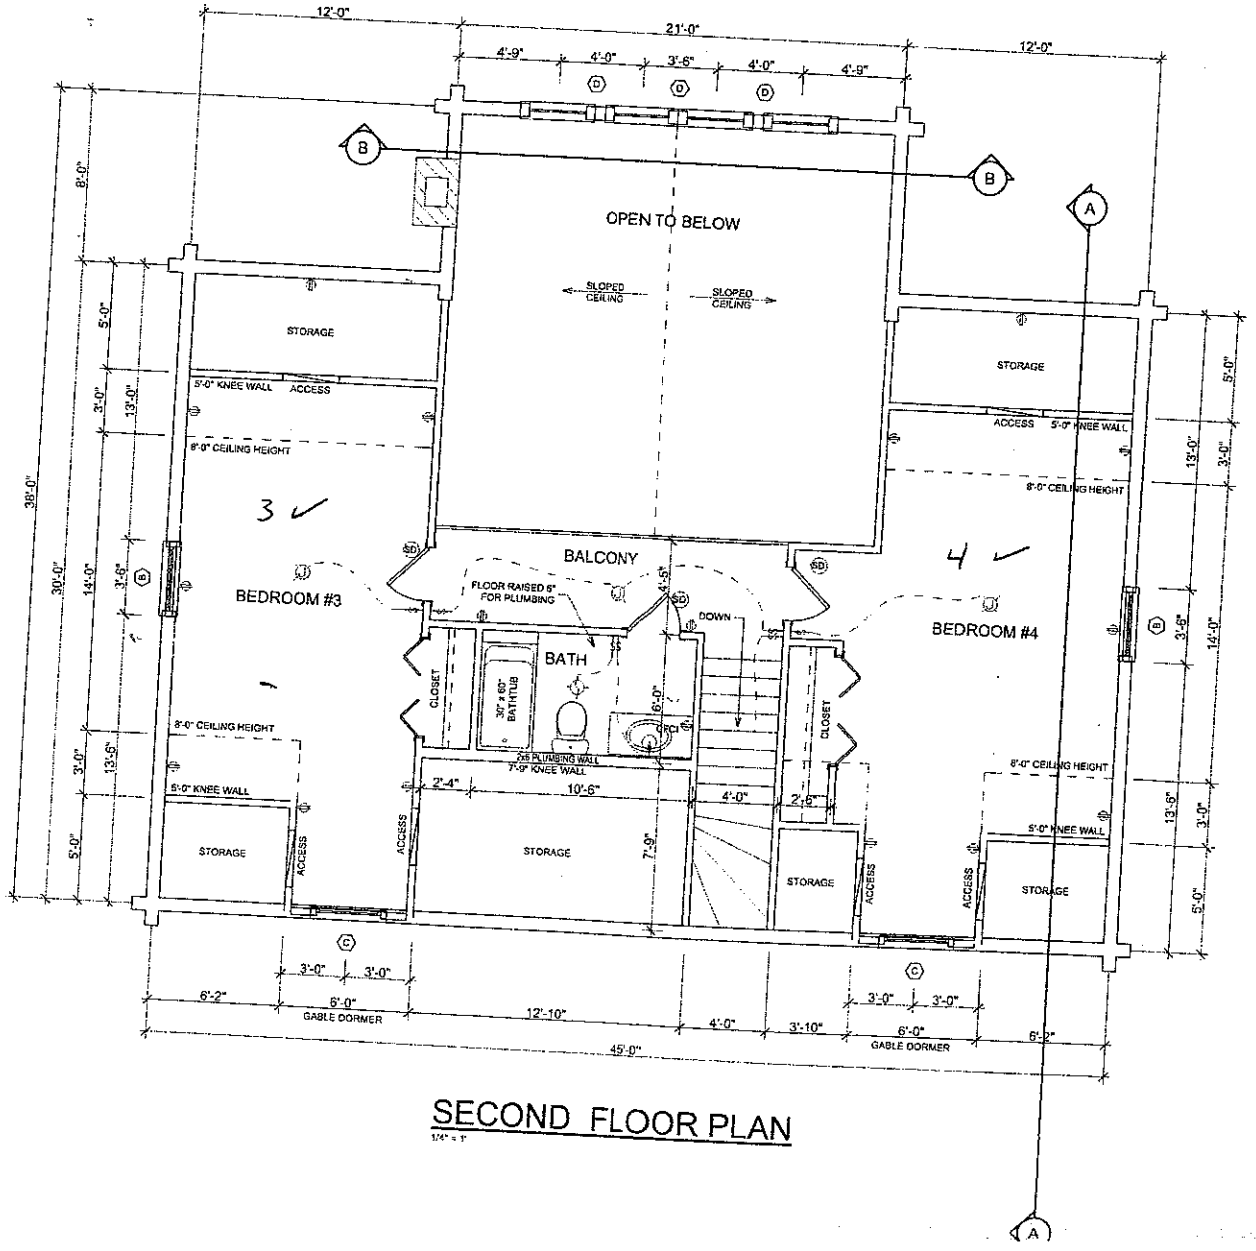

SECOND FLOOR PLAN
1/4" = 1'