
Hope methodist

PUMP TANK DESIGN

ATTACHMENT TO PROPERTY DESCRIPTION # 20490

TAX MAP # 9A-A-47+Pt.48

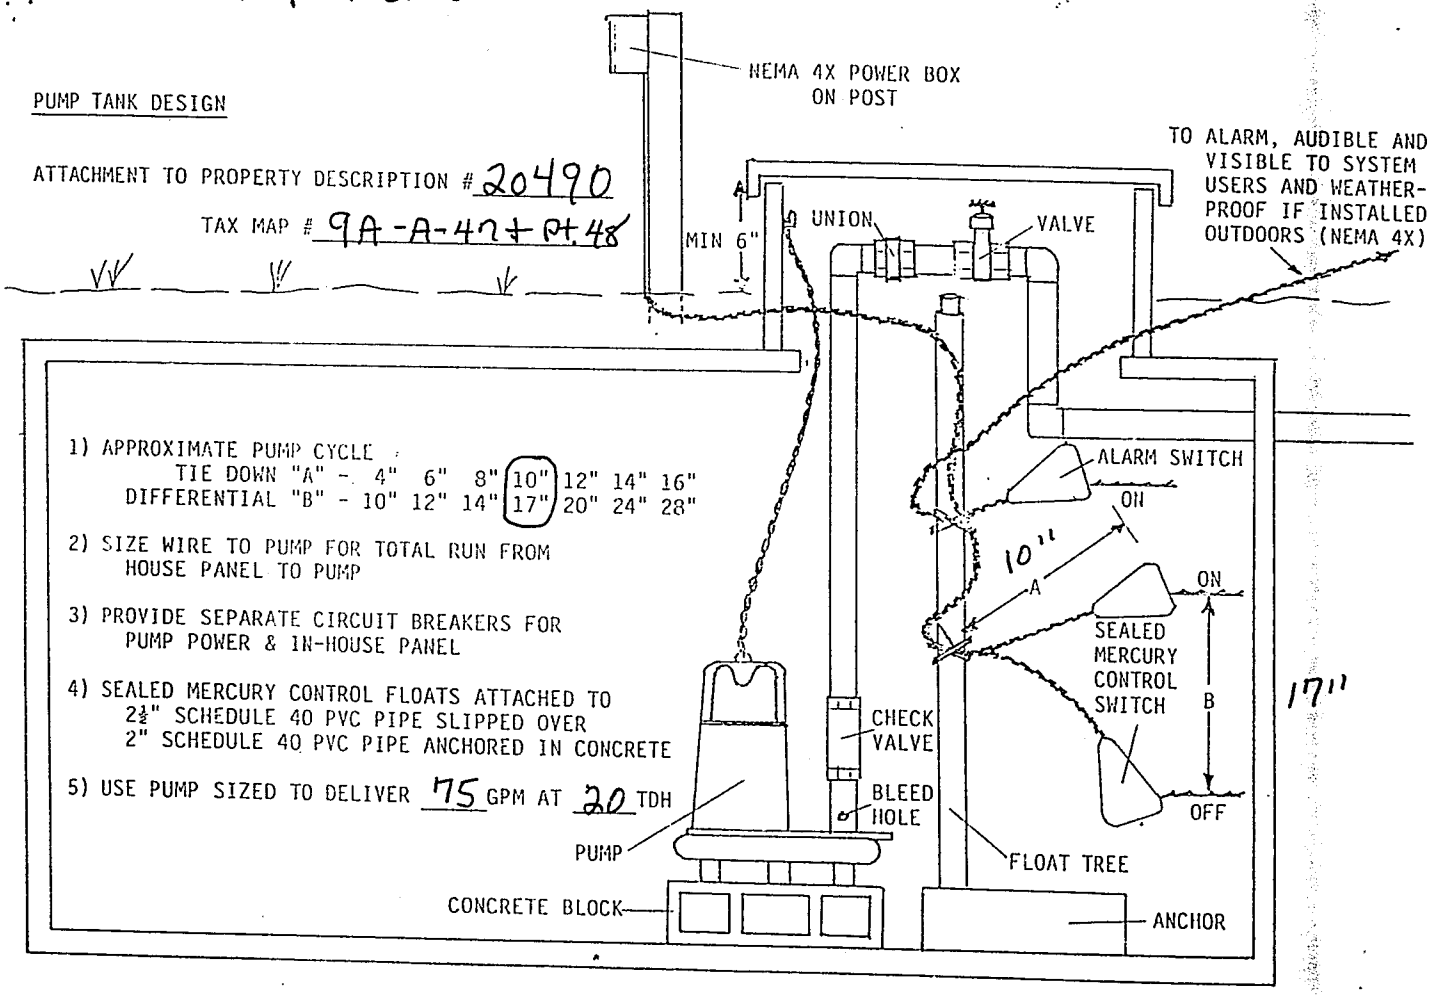

1) APPROXIMATE PUMP CYCLE :
   TIE DOWN "A" - 4" 6" 8" [10"] 12" 14" 16"
   DIFFERENTIAL "B" - 10" 12" 14" [17"] 20" 24" 28"

2) SIZE WIRE TO PUMP FOR TOTAL RUN FROM HOUSE PANEL TO PUMP

3) PROVIDE SEPARATE CIRCUIT BREAKERS FOR PUMP POWER & IN-HOUSE PANEL

4) SEALED MERCURY CONTROL FLOATS ATTACHED TO 2½" SCHEDULE 40 PVC PIPE SLIPPED OVER 2" SCHEDULE 40 PVC PIPE ANCHORED IN CONCRETE

5) USE PUMP SIZED TO DELIVER 75 GPM AT 20 TDH

00123