5'12 8' Flrs

Architect: Charcoal plan

#110 (Stock)

OSB only

22-B-30


Approved 3 Bedroom

SERIAL # 8719

Acknowledgement Of
Plans Submittal ONLY!

Date 12/22/08

Date

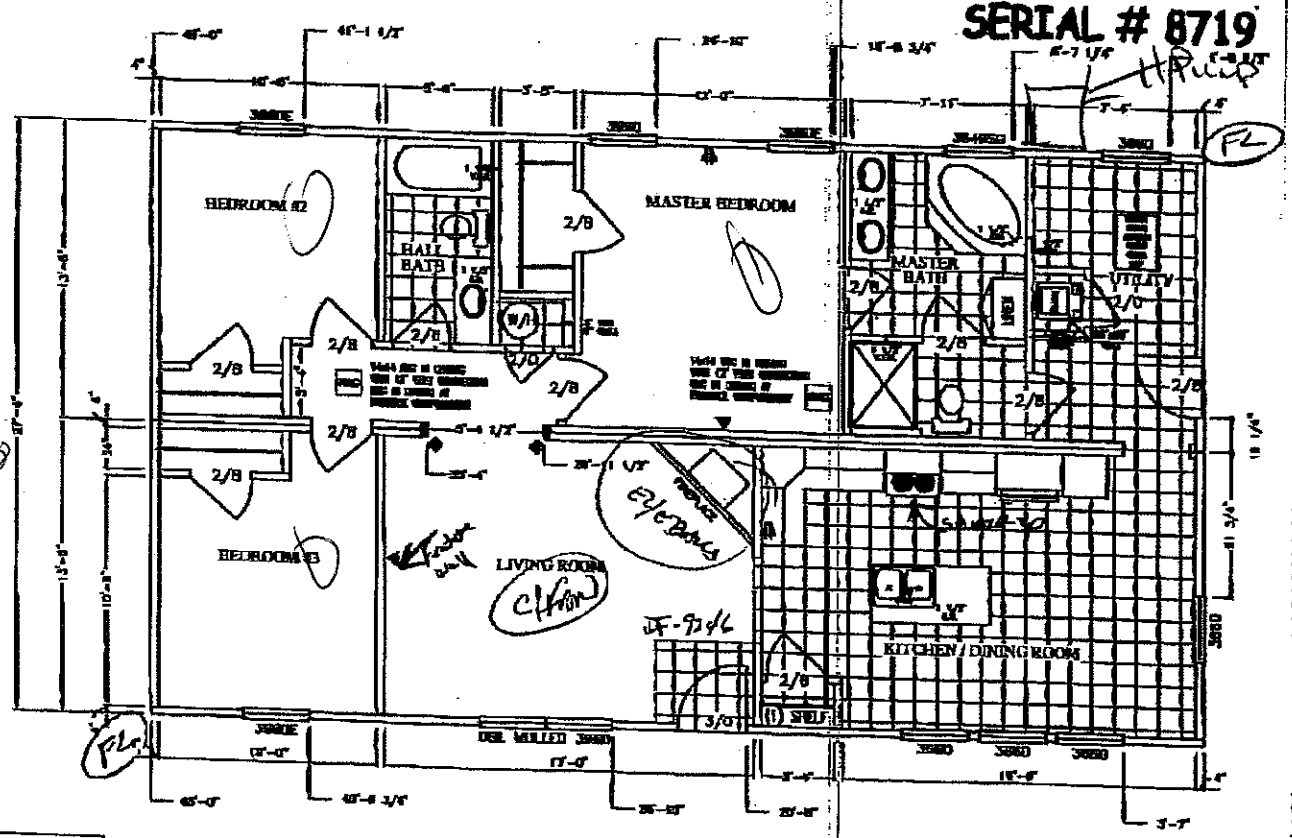

COLUMN STRAPPING SCHEDULE	
(A) (2) 2X4 SPF #2 THIS HALF.	(B) (2) 2X4 SPF #2 EACH HALF.
(C) (3) 2X4 SPF #2 THIS HALF.	(D) (3) 2X4 SPF #2 EACH HALF.
(E) (4) 2X4 SPF #2 THIS HALF.	(F) (4) 2X4 SPF #2 EACH HALF.
(G) (5) 2X4 SPF #2 THIS HALF.	(H) (5) 2X4 SPF #2 EACH HALF.
*: WITH RIDGE BEAM BEARING STIFFNER	

NOTES:
1. ALL COLUMN STUDS SHALL BE GLUED/NAILED TOGETHER. PVA GLUE WITH 100% COVERAGE SHALL BE USED.
2. INSTALL ONE STEEL STRAP PER STUD AT EACH COLUMN.
3. COLUMN STUDS SHALL NOT BE NOTCHED OR BORED.

1312 SQ. FT.

27'-4" x 48'-0" RESIDENTIAL MOD.

FLOOR PLAN

4 OF 21

DEC-17-2008 17:36 From:CLAYTON 933 7044637674 To:704 872 1166 P.21/39
From:CLAYTON HOMES 072 704 872 1166 12/22/2008 12:43 #010 P.002/002