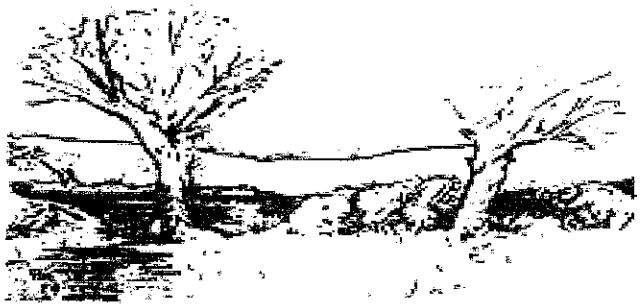


MICHAEL ATHANAS & ASSOCIATES
NORTH CAROLINA LISCENSED SOIL SCIENTEST
1999 CANDLEWICK DRIVE
FORT MILL, SOUTH CAROLINA 29715

Michael Athanas, NCLSS	***Brady Freeman, RS***
E-mail: mathanas@comporium.net	***E-mail: bfree209@yahoo.com***
Cell: 704-576-3887	***Cell: 704-746-6497***

Attached is an onsite wastewater septic design for a 3 bedroom residential home on lot 85 Wheatfield Subdivision in Iredell County, NC.

Contents: **Page**

Information for the Installer---------- 1

Design Information

Applicant and design specifications---------- 2

Line Specifications---------- 3

Site Plan/System Plan---------- 4

September 22, 2010

WHEATFIELD LOT 85

SYSTEM TYPE	**25% REDUCTION**
SYSTEM LTAR	**0.25 GPD/FTSQ**
SYSTEM LINE LENGTH	**375**
REPAIR TYPE	*LP PPBPS*
REPAIR LTAR	*0.25 GPD/FTSQ*
REPAIR LINE LENGTH	*240*

LINE #	FLAG COLOR	SHOT ELEVATION	LINE LENGTH
1	WHITE	N/A	40
2	ORANGE	N/A	70
3	BLUE	N/A	130
4	***PINK***	***N/A***	***115***
5	***WHITE***	***N/A***	***95***
6	***ORANGE***	***N/A***	***75***
7	***BLUE***	***N/A***	***55***
8	***PINK***	***N/A***	***35***
		Total	**615**
TBM		***N/A***	
HOUSE CORNER		***N/A***	
TANK		***N/A***	

WHEATFIELD LOT 85
APPLICANT AND DESIGN SPECIFICATIONS

Applicant:	Brazos Development
Phone:	704-201-6532
Address:	PO Box Troutman, NC 28166
County:	Iredell
Location:	lot 85 Wheatfield
Application for:	3 Bedroom Single Family Residence
Gallons per day:	360
Linear feet:	375
Loading Rate (gpd/ft.2):	0.25
Trench Depth:	36"
Trench Width:	36"
Septic Tank Size:	1000
Pump Tank Size:	N/A
Estimated Supply line Length/ft:	15
Supply Line Diameter:	3"
Dosing volume:	ON DEMAND
Lateral line volume:	N/A
Supply Manifold:	N/A
Manifold Length:	N/A
Manifold Volume:	N/A
Pressure Head:	N/A
Friction Head:	N/A
Elevation Head:	N/A
Friction factor:	N/A
TDH:	N/A
Pump Run:	N/A
Threaded Union:	N/A
Gate Valves:	N/A
Check Valves:	N/A
Anti-Siphon Hole:	N/A
Design flow:	**N/A**
Trench Bottom FT/SQ:	**1125**
Number of fields	**1**
Supply line length	**15'**
Draw down:	**N/A**
Comments:	Soil suitability was performed by Iredell County Health Dept.

*Pump tank draw down based on 21 gallons per inch. Draw down may vary depending on tank manufacturers.