DENR/DEH

ON-SITE WASTEWATER SECTION

Sheet 1 of 2
PROPERTY ID #: 3733
COUNTY: IREDELL

SOIL/SITE EVALUATION
for ON-SITE WASTEWATER SYSTEM

OWNER: Walter Harmon — APPLICATION DATE 6/8/15
ADDRESS: 153 Windtrack Dr. Troutman NC — DATE EVALUATED: 8/3/15
PROPOSED FACILITY: SFR — PROPOSED DESIGN FLOW (.1949): 240 GPD — PROPERTY SIZE: 1.169 Acre
LOCATION OF SITE: 143 Overlook Rd. — PROPERTY RECORDED: ____
WATER SUPPLY: ☐ Private ☐ Public ☐ Well ☐ Spring ☑ Other Community
EVALUATION METHOD: ☑ Auger Boring ☐ Pit ☐ Cut — TYPE OF WASTEWATER: ☑ Sewage ☐ Industrial Process ☐ Mixed

PROFILE #	.1940 LANDSCAPE POSITION/ SLOPE %	HORIZON DEPTH (IN.)	SOIL MORPHOLOGY (.1941) .1941 STRUCTURE/ TEXTURE	SOIL MORPHOLOGY (.1941) .1941 CONSISTENCE/ MINERALOGY	OTHER PROFILE FACTORS .1942 SOIL WETNESS/ COLOR	.1943 SOIL DEPTH	.1956 SAPRO CLASS	.1944 RESTR HORIZ	PROFILE CLASS & LTAR
A 1	LL 8%	0-22	RC, ABK	Fi, SS, SP	Drainage Mottles 8"-22" 2.5Y R 7/3	48"	N/A	/	.225
		22-48	RL, ABK/SBK	FR, SS, SP					
A 2	LL 7%	0-21	RC, ABK	Fi/Fr, SS, SP	Few V/F Drainage Mottles 8"-21"	39"	C-M SAP Incl 16"-39"	40"	.25 0"-21" .275 21"-39"
		21-39	RCL, SBK/ABK	FR, SS, SP					
		39-40	AR						
A 3	LL 7%	0-20"	RC, ABK	Fi/Fr, SS, SP	Minor V/L Drainage Mottles 8"-16"	46"	C-M SAP Incl 23-46"		.275 0-20" .3 23-46"
		20-46	RCL, SBK/ABK	FR, SS, SP					
		46-48	SAP Mass	VFR, SS, SP					
A 4	LL 9%	0-21	RC, ABK	Fi, SS, SP	Drainage Mottles 9"-21" 2.5Y R 7/3	48"	/	/	.225
		21-48	RL, SBK/ABK	FR, SS, SP					

DESCRIPTION	INITIAL SYSTEM	REPAIR SYSTEM
Available Space (.1945)	PS	PS
System Type(s)	Approved	Approved
Site LTAR	.25	.225

OTHER FACTORS (.1946): —
SITE CLASSIFICATION (.1948): PS
EVALUATED BY: Suzanne Brown
OTHER(S) PRESENT: Ben Aldridge

COMMENTS: Dry Conditions, Floating Rocks in Some Borings.

LEGEND

use the following standard abbreviations

LANDSCAPE POSITION	GROUP	SOIL TEXTURE	CONVENTIONAL .1955 LTAR*	LPP .1957 LTAR*	MINERALOGY/ CONSISTENCE	STRUCTURE
CC (Concave Slope) CV (Convex Slope) D (Drainage Way) DS (Debris Slump) FP (Flood Plain) FS (Foot Slope) H (Head Slope) L (Linear Slope) N (Nose Slope) R (Ridge) S (Shoulder Slope) T (Terrace)	I	S (Sand) LS (Loamy Sand)	1.2 - 0.8	0.6 - 0.4	NEXP (Non-expansive) SEXP (Slightly Expansive) EXP (Expansive)	G (Single Grain) M (Massive) CR (Crumb) GR (Granular) SBK (Subangular Blocky) ABK (Angular Blocky) PL (Platy) PR (Prismatic)
	II	SL (Sandy Loam) L (Loam)	0.8 - 0.6	0.4 - 0.3		
	III	Si (Silt) SiCL (Silty Clay Loam) CL (Clay Loam) SCL (Sandy Clay Loam) SiL (Silt Loam)	0.6 - 0.3	0.3 - 0.15		
	IV	SC (Sandy Clay) SiC (Silty Clay) C (Clay)	0.4 - 0.1	0.2 - 0.05		
		O (Organic)	None	None		

MOIST	WET
VFR (Very Friable)	NS (Non-sticky)
FR (Friable)	SS (Slightly Sticky)
FI (Firm)	S (Sticky)
VFI (Very Firm v. Very Sticky)	VS (Very Sticky)
EFI (Extremely Firm)	NP (Non-plastic)
	SP (Slightly Plastic)
	P (Plastic)
	VP (Very Plastic)

*Adjust LTAR due to depth, consistence, structure, soil wetness, landscape, position, wastewater flow and quality.


NOTES

HORIZON DEPTH	In inches below natural soil surface
DEPTH OF FILL	In inches from land surface
RESTRICTIVE HORIZON	Thickness and depth from land surface
SAPROLITE	S(suitable) or U(unsuitable)
SOIL WETNESS	Inches from land surface to free water or inches from land surface to soil colors with chroma 2 or less - record Munsell color chip designation
CLASSIFICATION	S (Suitable), PS (Provisionally Suitable), or U (Unsuitable)

Evaluation of saprolite shall be by pits.

Long-term Acceptance Rate (LTAR): gal/day/ft^2

Show profile locations and other site features (dimensions, reference or benchmark, and North).

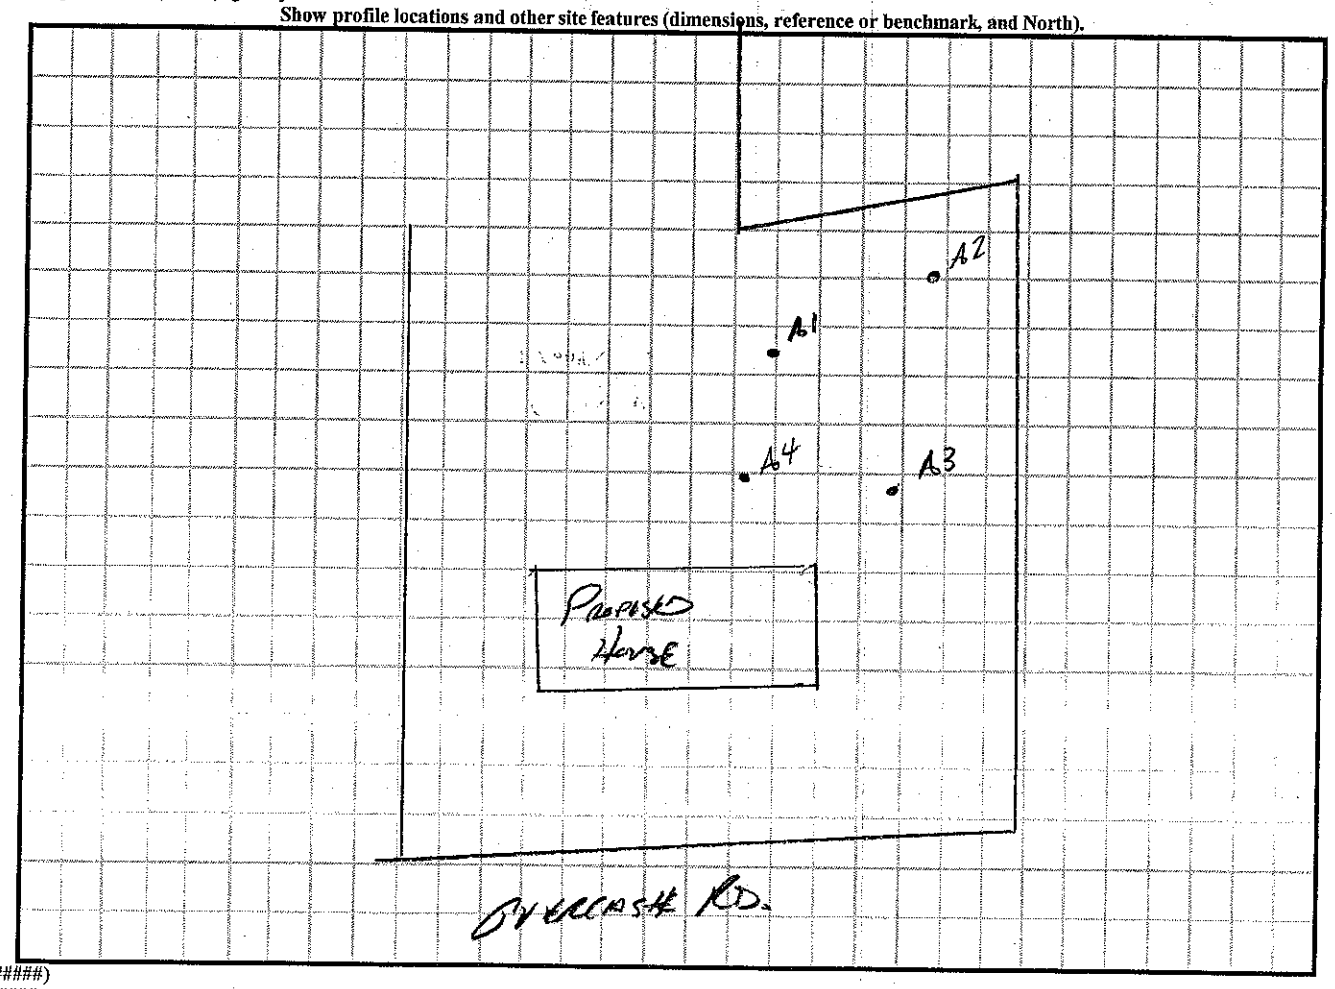

DENR (######)
Review (#####)

Auger Boring Locations

1 inch = 40 feet

1:480

