
T+T Inc
Part of Permit
Lot 231 Sec V

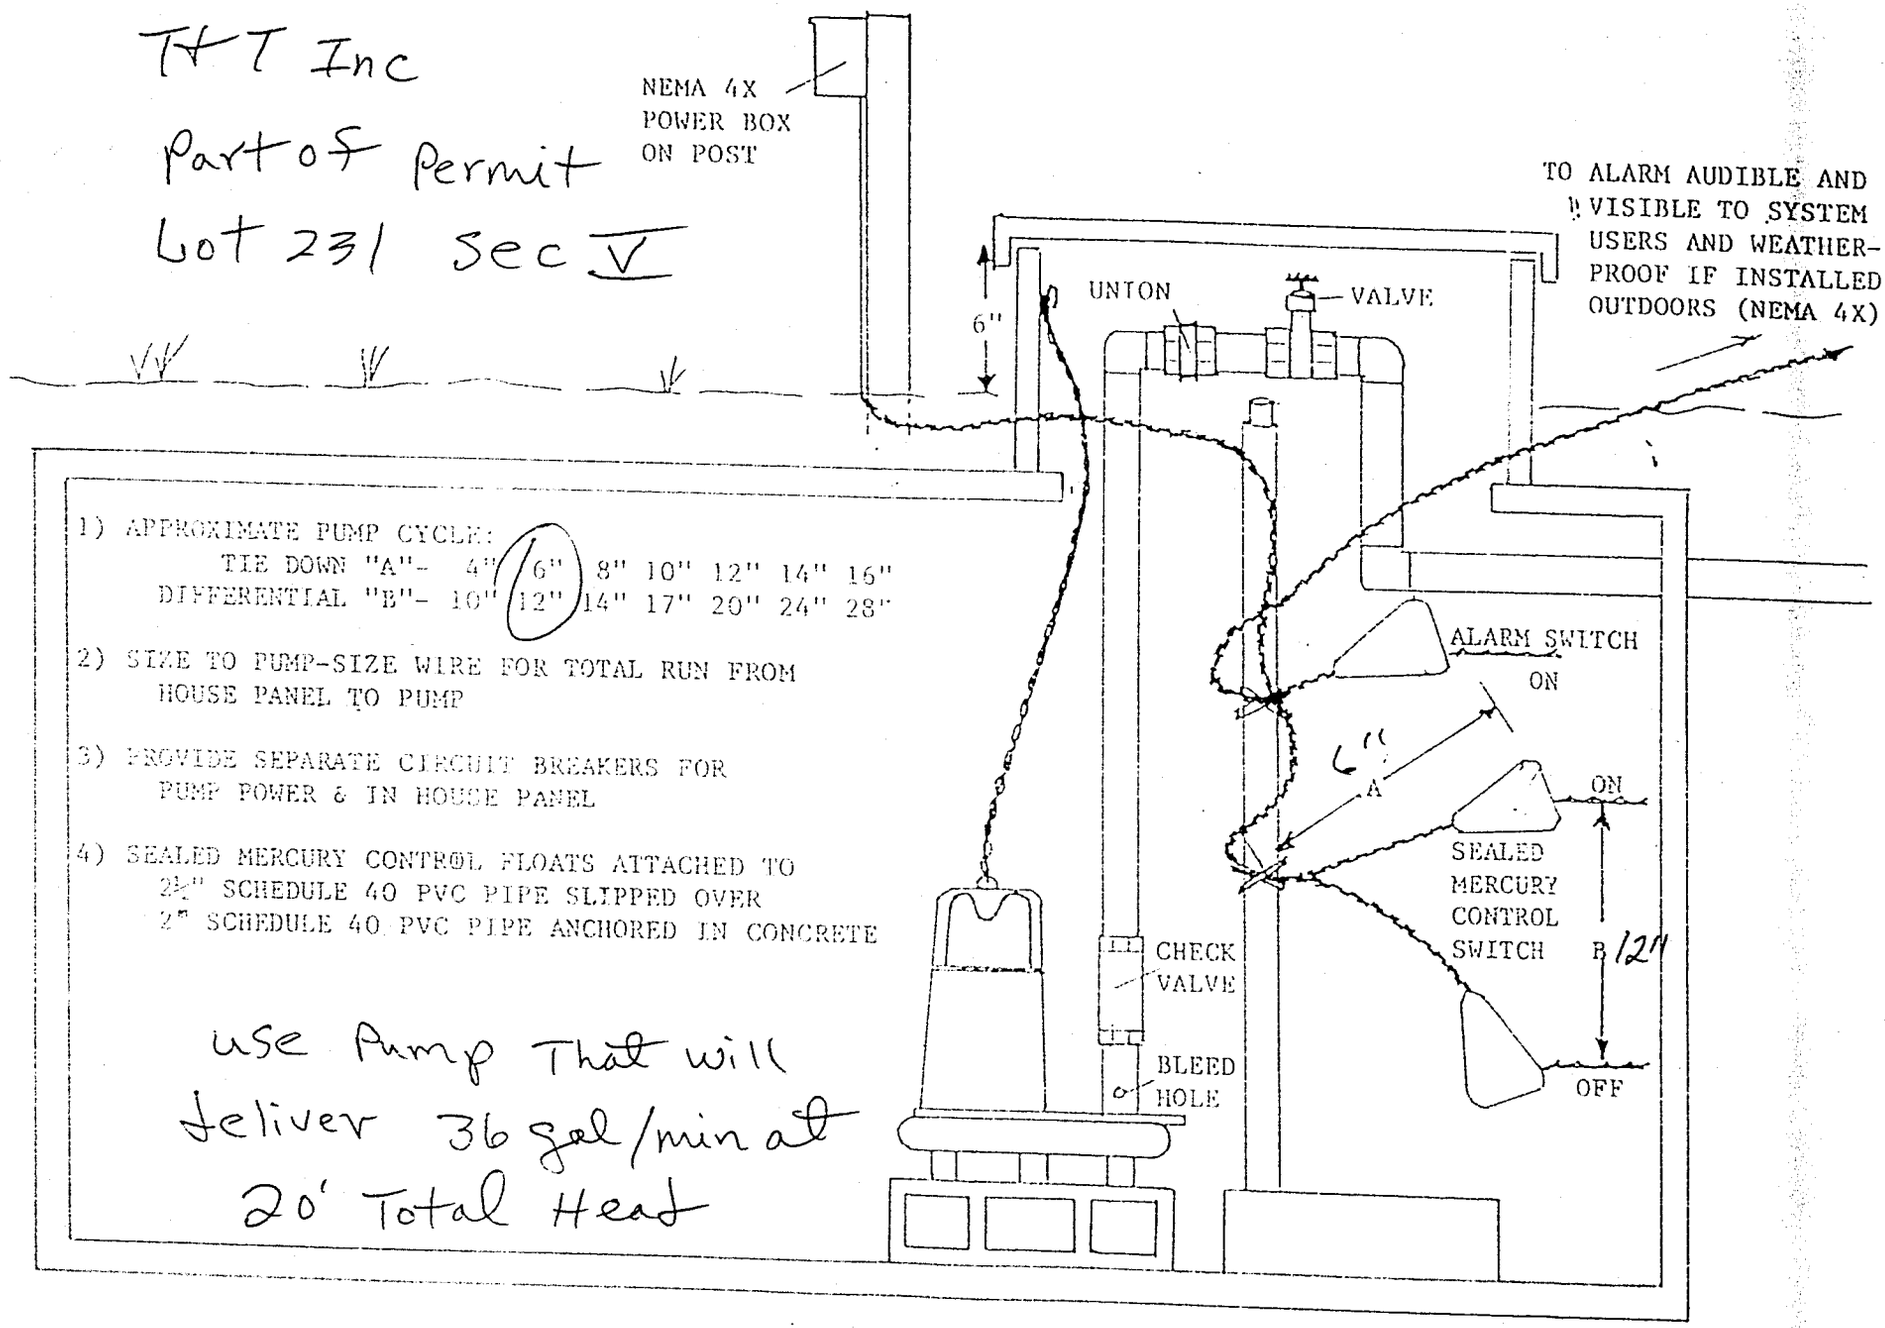

1) APPROXIMATE PUMP CYCLE:
TIE DOWN "A"- 4" 6" 8" 10" 12" 14" 16"
DIFFERENTIAL "B"- 10" 12" 14" 17" 20" 24" 28"

2) SIZE TO PUMP-SIZE WIRE FOR TOTAL RUN FROM HOUSE PANEL TO PUMP

3) PROVIDE SEPARATE CIRCUIT BREAKERS FOR PUMP POWER & IN HOUSE PANEL

4) SEALED MERCURY CONTROL FLOATS ATTACHED TO 2½" SCHEDULE 40 PVC PIPE SLIPPED OVER 2" SCHEDULE 40 PVC PIPE ANCHORED IN CONCRETE

use Pump That will deliver 36 gal/min at 20' Total Head

- PUMP TANK DESIGN -