BLDR-2023-38519

ICHD - ENVIRONMENTAL HEALTH DIVISION

Statesville Office (704) 878-5305 Mooresville Office (704) 660-3625

PERMIT # OSWP-2023-36261

SEPTIC: IMPROVEMENT PERMIT / AUTHORIZATION TO CONSTRUCT / OPERATION PERMIT / EXISTING SYSTEM

PIN # 4764-64-5330

APPLICANT / OWNER: Randy Chilton APPLICANT ADDRESS: 155 Farmwood Drive Statesville 28625

SITE ADDRESS: 155 145 FARMWOOD DR, STATESVILLE, NC 28625 PHONE: ALT. PHONE:

SITE DIRECTIONS: SAP CONTROLLED: YES ☐ NO ☐

SUBDIVISION: MAYWOOD SECTION: - LOT #: 4-5 LOT AREA: 2.97 DESIGN FLOW: 480 L.T.A.R.: .25

Septic Tank: (gal) 1000	STB: 760	Date:	☑ New System ☐ Repair ☐ Expansion	System Type: III	☐ Residence	No. Bedrooms: 4	Water Supply: Other Public Water
Pump Tank: (gal) -	PT: -	Date: -	System Description: IQ4 Chamber 25% Reduction		☐ Business	No. Persons: 4	
Pump Make: -	Model: -	Serial #: -	Repair System Description: Horizontal PDRPS. 50% Reduct		☐ Other	No. Employees:	
Nitrification Fields: 1	# Lines: 7	Linear Ft.: 480	Maintenance Agreement Required: ☐ YES ☑ NO		☐ Slab	☑ Crawl Space	
Trench Width: 36in.	Trench Bottom Depth (Low side): 19in.		Gravel Depth: -	☑ GRAVITY ☐ PRESSURE	☐ Basement w/ Plumbing	☐ Basement w/o Plumbing	

Comments / Conditions: BK 3020 PG 1958

INITIAL SITE SKETCH

This improvement Permit is issued pursuant to G.S. 130A-335 (a2) & (a3) using the signed and Sealed LES/LE Evaluation. This Construction Authorization is issued pursuant to G.S. 130A-335 (a2) & (a5) using the signed & Sealed plans or evaluations attached here.

AS BUILT SKETCH

See attached for as built

Permit can be suspended or revoked if any false information is supplied toward securing the permit / any unauthorized changes are made to the site / any unauthorized changes are made in the installation of the system. CONTACT A LOCATOR SERVICE PRIOR TO ANY EXCAVATION

☐ IMPROVEMENT PERMIT with plat valid without expiration. ☑ IMPROVEMENT PERMIT with site plan valid for 60 mos. ☑ AUTHORIZATION TO CONSTRUCT valid for period equal to IMPROVEMENT PERMIT--not to exceed 60 mo.

Owner / Applicant Signature: Randal T. Chilton Date:

IMPROVEMENT PERMIT by: Benjamin Bass Date: 10/10/2023

AUTHORIZATION TO CONSTRUCT by: Benjamin Bass Date: 10/10/2023

Installed By: Craig Thompson

OPERATION PERMIT by: BM Date: 4/17/24

Existing System Inspected By: Date:

FOR SEPTIC FINAL INSPECTION CALL: 704-664-3703 BETWEEN 8am-9am the day the inspection is needed.


PIEDMONT ENVIRONMENTAL ASSOCIATES, P.A.

Site Plan/Borings/Layout Diagram - 155 Farmwood Drive

216 S. Swing Rd. Suite 1
Greensboro, NC 27409
piedmontsoil.com

Job# 2827
Date: 08/24/2023
Client: Randy Chilton
County: Iredell

MAP NOT VALID WITHOUT REPORT

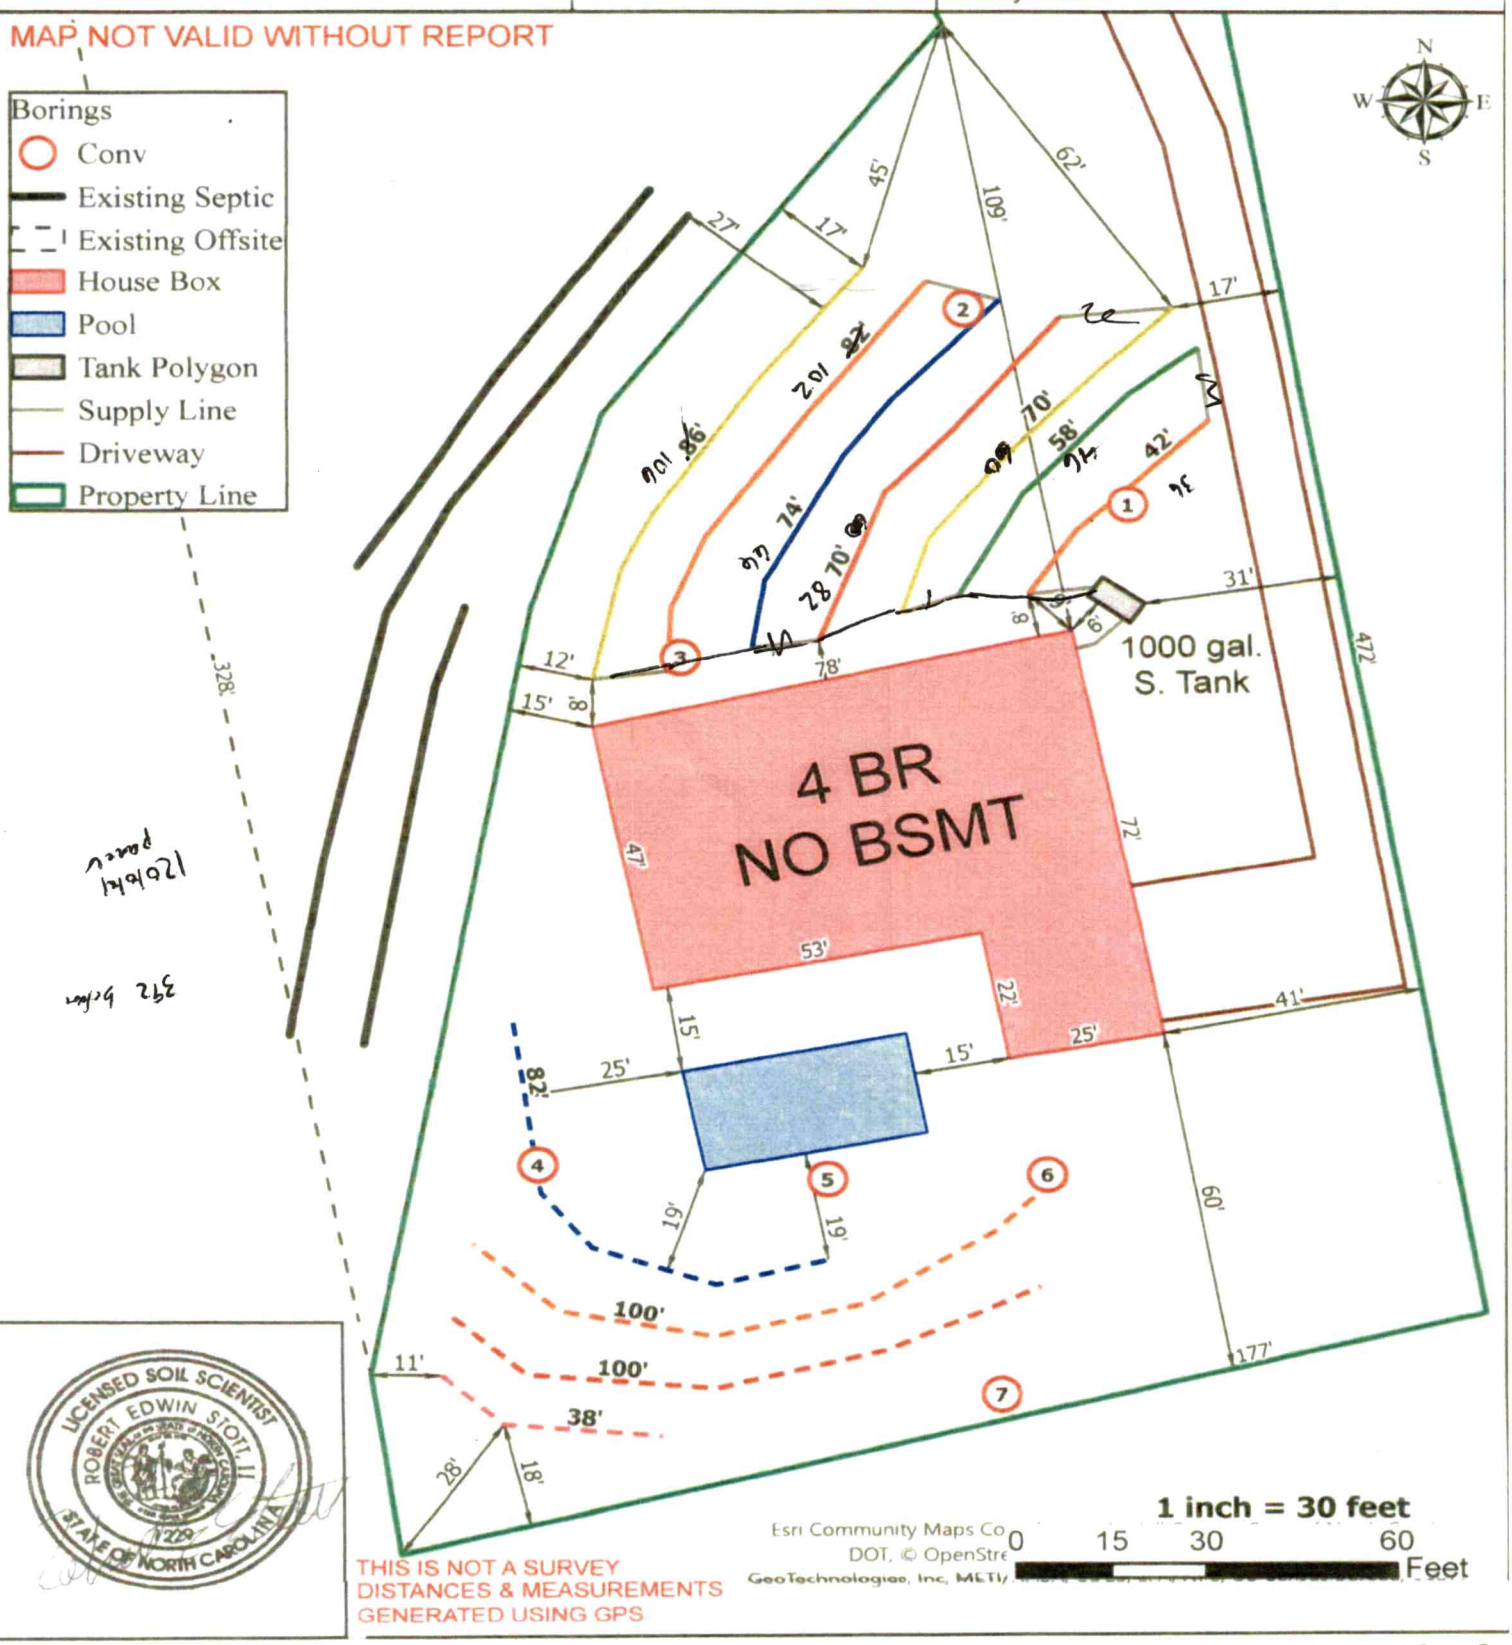

1 inch = 30 feet

0 15 30 60 Feet

Esri Community Maps Co
DOT, © OpenStre
GeoTechnologies, Inc, METI/

LICENSED SOIL SCIENTIST
ROBERT EDWIN STOTT, II
1229
STATE OF NORTH CAROLINA

THIS IS NOT A SURVEY
DISTANCES & MEASUREMENTS
GENERATED USING GPS

Permit #: 05WP-2023-36261

NC DEPARTMENT OF HEALTH AND HUMAN SERVICES

ROY COOPER • Governor
KODY H. KINSLEY • Secretary
MARK BENTON • Deputy Secretary for Health
SUSAN KANSAGRA • Assistant Secretary for Public Health
Division of Public Health

Submittal Includes: ☑ **(a2) Improvement Permit** ☑ **(a2) Construction Authorization** ☐ **Fee $**_____

IMPROVEMENT PERMIT FOR G.S. 130A-335(a2)

County: Iredell

PIN/Lot Identifier: 4764645330.000

Issued To: Randy Chilton Company:

Property Location: 155 Farmwood Drive City/Town: Statesville

Subdivision (if applicable)_____ Lot #: _____ Block: _____ Section: _____

LSS Report Provided: Yes ☑ No ☐

If yes, name and license number of LSS: R. Edwin Stott #1229

New ☑ Expansion ☐ System Relocation ☐ Change of Use ☐

Proposed Structure: Single Family Residence

Number of bedrooms: 4 Number of Occupants: 8 max Other: _____

Design Wastewater Strength: ☑ domestic ☐ high strength ☐ industrial process

Proposed Design Daily Flow: 480 GPD Proposed LTAR (Initial): 0.25 Proposed LTAR (Repair): 0.25

Proposed Wastewater System Type*: IQ4 Chamber (Initial) Pump Required: ☐ Yes ☑ No ☐ May be required

Proposed Wastewater System Type*: Horiz. PPBPS (fill cap) (Repair) Pump Required: ☐ Yes ☑ No ☐ May be required

**Please include system classification for proposed wastewater system types in accordance with 15A NCAC 18A .1961 Table V(a)*

Saprolite System (initial): ☐ Yes ☑ No Saprolite System (repair): ☐ Yes ☑ No

Fill System (Initial): ☐ Yes ☑ No If yes, specify: ☐ New ☐ Existing (when adding more than 6 inches of fill to system area provide a fill plan)

Fill System (repair): ☐ Yes ☑ No If yes, specify: ☐ New ☐ Existing (when adding more than 6 inches of fill to system area provide a fill plan)

Usable Soil Depth (Initial): 31 Usable Soil Depth (Repair): 28

Max. Trench Depth (Initial)‡: 19 Max. Trench Depth (Repair)‡: 16 ***‡ Measured on the downhill side of the trench***

Artificial Drainage Required: ☐ Yes ☑ No If yes, please specify details: _____

Type of Water Supply: ☐ Private well ☐ Public well ☐ Shared well ☑ Municipal Supply ☐ Spring ☐ Other: _____

Drainfield location meets requirements of Rule .1945: Yes ☑ No ☐ Drainfield location meets requirements of Rule .1950: Yes ☑ No ☐

Permit valid for: ☑ Five years [site plan submitted pursuant to GS 130A-334(13a)] ☐ No expiration [plat submitted pursuant to GS 130A-334(7a)]

Permit conditions:
SEE ATTACHED SHEET

Licensed Soil Scientist Print Name: R. Edwin Stott

Licensed Soil Scientist Signature: Robert Edwin Stott Date: August 24, 2023

The LSS evaluation is being submitted pursuant to and meets the requirements of G.S. 130A-335(a2).

See attached site sketch

NCDHHS

Permit #: CSWP-2023-362261

CONSTRUCTION AUTHORIZATION FOR G.S. 130A-335(a2)

County: Iredell

PIN/Lot Identifier: 4764645330.000

Issued To: Randy Chilton Company:

Property Location: 155 Farmwood Drive City/Town: Statesville

AOWE/PE Plans/Evaluations Provided: Yes ☑ No ☐ If yes, name and license number of AOWE/PE: R. Edwin Stott #10009E

Facility Type: Single Family Residence

☑ New ☐ Expansion ☐ Repair ☐ System Relocation ☐ Change of Use

Basement? ☐ Yes ☑ No Basement Fixtures? ☐ Yes ☐ No

Type of Wastewater System* iQ4 Chamber (Initial) Horiz. PPBPS (fill cap) (Repair)

**Please include system classification for proposed wastewater system types in accordance with 15A NCAC 18A .1961 Table V(a)*

Design Daily Flow: 480 GPD Wastewater Strength: ☑ domestic ☐ high strength ☐ industrial process

Session Law 2014-120 Section 53, Engineering Design Utilizing Low-flow Fixtures and Low-flow Technologies? ☐ Yes ☑ No
(if yes, please provide engineering documentation)

Installation Requirements/Conditions

Septic Tank Size: 1000 gallons Total Trench/Bed Length: 482 feet Trench/Bed Spacing: 9 feet on center

Trench/Bed Width: 36 inches LTAR: 0.25 gpd/ft²

Soil Cover: 7 inches Slope Corrected Maximum Trench/Bed Depth‡: 19 inches ‡ ***Measured on the downhill side of the trench***

Aggregate Depth: N/A inches above pipe N/A inches below pipe N/A inches total

Pump Tank Size (if applicable): N/A gallons Requires more than 1 pump? ☐ Yes ☑ No

Pump Requirements: N/A ft. TDH vs. N/A GPM Grease Trap Size (if applicable): N/A gallons

Distribution Method: ☑ Serial ☐ D-Box or Parallel ☐ Pressure Manifold(s) ☐ LPP ☐ Other:

Artificial Drainage Required: Yes ☐ No ☑ If yes, please specify details:

Legal Agreements *(If the answer is "Yes" to any type of legal agreements, please attach a copy of the agreement.)*

Multi-party Agreement Required [.1937(h)]: ☐ Yes ☑ No

Easement, Right-of-Way, or Encroachment Agreement Required [.1938(j)]: ☐ Yes ☑ No

Declaration of Restrictive Covenants: ☐ Yes ☑ No

Pre-Construction Conference Required: Yes ☑ No ☐

Conditions: SEE ATTACHED SHEET

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by reference into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

AOWE/PE Print Name: R. Edwin Stott Expiration Date:

AOWE/PE Signature: R. Edwin Stott Date: August 24, 2023

This AOWE/PE submittal is pursuant to and meets the requirements of G.S. 130A-335(a2) and (a5).

See attached site sketch

PIEDMONT
ENVIRONMENTAL
ASSOCIATES, P.A.

August 24, 2023

Project # 2827

Session Law 2023-90 (H628)

Client:

Randy Chilton

Site:

155 Farmwood Drive

Iredell County, NC

PIN: 4764645330.000

Prepared by:

R. Edwin Stott

NC Licensed Soil Scientist #1229

NC Onsite Wastewater Evaluator #10009E

PIEDMONT ENVIRONMENTAL ASSOCIATES, P.A.

August 24, 2023 Project # 2827

Iredell County Environmental Health Department

To whom it may concern,

In accordance with Session Law 2023-90 (H628) this statement is submitted respectfully to satisfy signed and dated statement requirement from the property owner or owner's legal representative:

"The LSS evaluation attached to this application is to be used to issue an Improvement Permit in accordance with G.S. 130A-335(a2) and (a3)."

"The plans or evaluations attached to this application are to be used to issue a Construction Authorization in accordance with G.S. 130A-335(a2), (a5) and (a6)."

Sincerely,

Randy Chilton

216 S. Swing Rd., Suite 1 Greensboro, NC 27409 (336) 344-4008

Permit #: OSWP-2023-36261

This Section for Local Health Department Use Only

Initial submittal received: 9/15/2023 (Date) by BB. (Initials)

G.S. 130A-335(a5) states the following:

When an applicant for a Construction Authorization, or an Improvement Permit and Construction Authorization together, submits a Construction Authorization, or an Improvement Permit and Construction Authorization application together, the permit fee charged by the local health department, the common form developed by the Department, and any necessary signed and sealed plans or evaluations conducted by a person licensed pursuant to Chapter 89C of the General Statutes as a licensed engineer or a person certified pursuant to Article 5 of Chapter 90A of the General Statutes as an Authorized On-Site Wastewater Evaluator, the local health department shall, within five business days of receiving the application, conduct a completeness review of the submittal. A determination of completeness means that the Construction Authorization or Improvement Permit and Construction Authorization includes all of the required components. If the local health department determines that the Construction Authorization or Improvement Permit and Construction Authorization is incomplete, the local health department shall notify the applicant of the components needed to complete the Construction Authorization or Improvement Permit and Construction Authorization. The applicant may submit additional information to the local health department to cure the deficiencies in the Construction Authorization or Improvement Permit and Construction Authorization. The local health department shall make a final determination as to whether the Construction Authorization or Improvement Permit and Construction Authorization is complete within five business days after the local health department receives the additional information from the applicant. If the local health department fails to act within any period set out in this subsection, the applicant may treat the failure to act as a determination of completeness. The applicant may apply for the building permit for the project upon the decision of completeness of the Construction Authorization or Improvement Permit and Construction Authorization by the local health department or if the local health department fails to act within five business days. The Authorized On-Site Wastewater Evaluator or licensed engineer submitting the evaluation pursuant to this subsection may request that the local health department revoke or suspend the Construction Authorization or Improvement Permit and Construction Authorization for cause. Upon written request of the Authorized On-Site Wastewater Evaluator or licensed engineer, the local health department shall suspend or revoke the Construction Authorization or Improvement Permit and Construction Authorization pursuant to G.S. 130A-23. The Department shall develop a common form for use as the Construction Authorization.

The review for completeness of this Construction Authorization was conducted in accordance with G.S. 130A-335(a5). This Construction Authorization is determined to be:

☐ Incomplete (If box is checked, information in this section is required.)

The following items are missing: _____

_____

Copies of this were sent to the AOWE/PE and the Applicant on _____ (Date)

State Authorized Agent: _____ Date: _____

☑ Complete

State Authorized Agent: Benjamin A Botkin Date of Issuance: 10/10/2023

This Construction Authorization is issued pursuant to G.S. 130A-335(a2) and (a5) using the signed and sealed plans or evaluations attached here. This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be affected by a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

The Department, the Department's authorized agents, and the local health departments shall be discharged and released from any liabilities, duties, and responsibilities imposed by statute or in common law from any claim arising out of or attributed to plans, evaluations, preconstruction conference findings, submittals, or actions from a person licensed pursuant to Chapter 89C of the General Statutes as a licensed engineer or a person certified pursuant to Article 5 of Chapter 90A of the General Statutes as an Authorized On-Site Wastewater Evaluator in GS 130A-335(a2), (a5), and (a7). The Department, the Department's authorized agents, and the local health departments shall be responsible and bear liability for their actions and evaluations and other obligations under State law or rule, including the issuance of the operations permit pursuant to GS 130A-337.

Construction Authorization Expiration Date: 10/10/2028

See attached site sketch

Permit Parameters and Conditions


- Design flow with residential systems utilizes the number of bedrooms and assumes no more than two residents per bedroom at 60 gallons per resident or 120 gallons per bedroom. This is how the design flow of 480 gallons per day is calculated. The wastewater system is designed to handle a maximum flow of 480 gallons per day. This flow should not be maintained for any sustained length of time or oversaturation can occur in the trenches. An average daily water usage of 50% is recommended for peak performance.
- No garbage disposals should be added to the wastewater stream.
- Water softener waste should not be added to the wastewater stream.
- Fats, oils and greases or FOG should not be added to the wastewater stream and can cause premature failure. Dispose of fats, oils, greases and garbage properly in household waste.
- There should be no traffic over the wastewater system area.
- Piedmont Environmental recommends a preconstruction conference prior to any installation to ensure that the system is placed in the correct area once the site is cleared of vegetation.
- Please note that mechanical clearing that is done in wet conditions or done by someone not following best management practices can render an otherwise usable site unsuitable.
- Piedmont Environmental Associates, PA highly recommends using a reputable septic system installer that is licensed in North Carolina to perform or oversee any clearing.
- All installation work shall be performed by a licensed Wastewater System Installer
- Do not install during wet conditions
- Pump tank every three to five years
- Landscape promptly to obtain a good grass cover to prevent erosion over new part of system
- Last 3 inches of dams shall be dug by hand
- Repair system will require an fill cap approved by a NC Licensed Soil Scientist or a local county Environmental Health Department official

Disclaimer

This report discusses the general location of potentially usable soils for on-site wastewater disposal and the soil and site limitations on the property that exists at the time of the evaluation. Piedmont Environmental Associates, PA ("Piedmont") provides professional consulting specializing in the practice of soil science and wastewater management. Piedmont is therefore hired for its professional opinion regarding these matters. This report is being prepared as part of a packet to obtain an improvement permit SL2023-90 and GS 130A-335 and GS 130A-336. Piedmont Environmental Associates provides no warranty either written or implied regarding the lifespan of any type of septic system. Piedmont Environmental Associates utilizes accepted soil science practices and assigns LTAR's and proposes trench depths based on field observation, law, rule, published data and accepted practice of the profession. Piedmont Environmental Associates however cannot guarantee the life span of any type of septic system component, trench media, pretreatment device, distribution device, distribution method, or installation method as there are simply too many variables that are not within the control of Piedmont Environmental Associates.

If you have any further questions, please feel free to call. Thank you for the opportunity to serve.

Sincerely,





R. Edwin Stott II, REHS, MSEH
NC Licensed Soil Scientist
NC On-site Wastewater Evaluator

Setbacks

.1950 Location of Sanitary Sewage Systems

(c) Every sanitary sewage treatment and disposal system shall be located at least the minimum horizontal distance from the following:

(1) Any private water supply source including a well or spring 100 feet
(2) Any public water supply source 100 feet
(3) Streams classified as WS-I 100 feet
(4) Water classified as S.A. 100 feet
from mean high water mark
(5) Other coastal waters 50 feet
from mean high water mark
(6) Any other stream, canal, marsh, or other surface waters 50 feet
(7) Any Class I or Class II reservoir 100 feet
from normal pool elevation
(8) Any permanent storm water retention pond 50 feet
from flood pool elevation
(9) Any other lake or pond 50 feet
from normal pool elevation
(10) Any building foundation 5 feet
(11) Any basement 15 feet
(12) Any property line 10 feet
(13) Top of slope of embankments or cuts of 2 feet or more
vertical height 15 feet
(14) Any water line 10 feet
(15) Drainage systems:
(A) Interceptor drains, foundation drains and storm water diversions
(i) upslope 10 feet
(ii) sideslope 15 feet
(iii) downslope 25 feet
(B) Groundwater lowering ditched and devices 25 feet
(16) any swimming pool 15 feet
(17) any other nitrification field (except repair area) 20 feet

(b) Ground absorption, sewage treatment and disposal systems may be located closer than 100 feet from a private well supply, except springs and uncased wells located downslope and used as a source of drinking water, repairs, space limitations and other site-planning considerations but shall be located the maximum feasible distance and, in no case, less than 50 feet.

(c) Nitrification fields and repair areas shall not be located under paved areas or areas subject to vehicular traffic. If effluent is to be conveyed under areas subject to vehicular traffic, ductile iron or its equivalent pipe shall be used. However, pipe specified in Rule .1955 (e) may be used if a minimum of 30 inches of compacted cover is provided over the pipe.

Note: Systems over 3000 GPD or an individual nitrification fields with a capacity of 1500 GPD or more have more restrictive setback requirements, see .1950 (a) (17) (d) for specifics.


PIEDMONT ENVIRONMENTAL ASSOCIATES, P.A.

Site Plan/Borings/Layout Diagram - 155 Farmwood Drive

216 S. Swing Rd. Suite 1
Greensboro, NC 27409
piedmontsoil.com

Job# 2827
Date: 08/24/2023
Client: Randy Chilton
County: Iredell

MAP NOT VALID WITHOUT REPORT

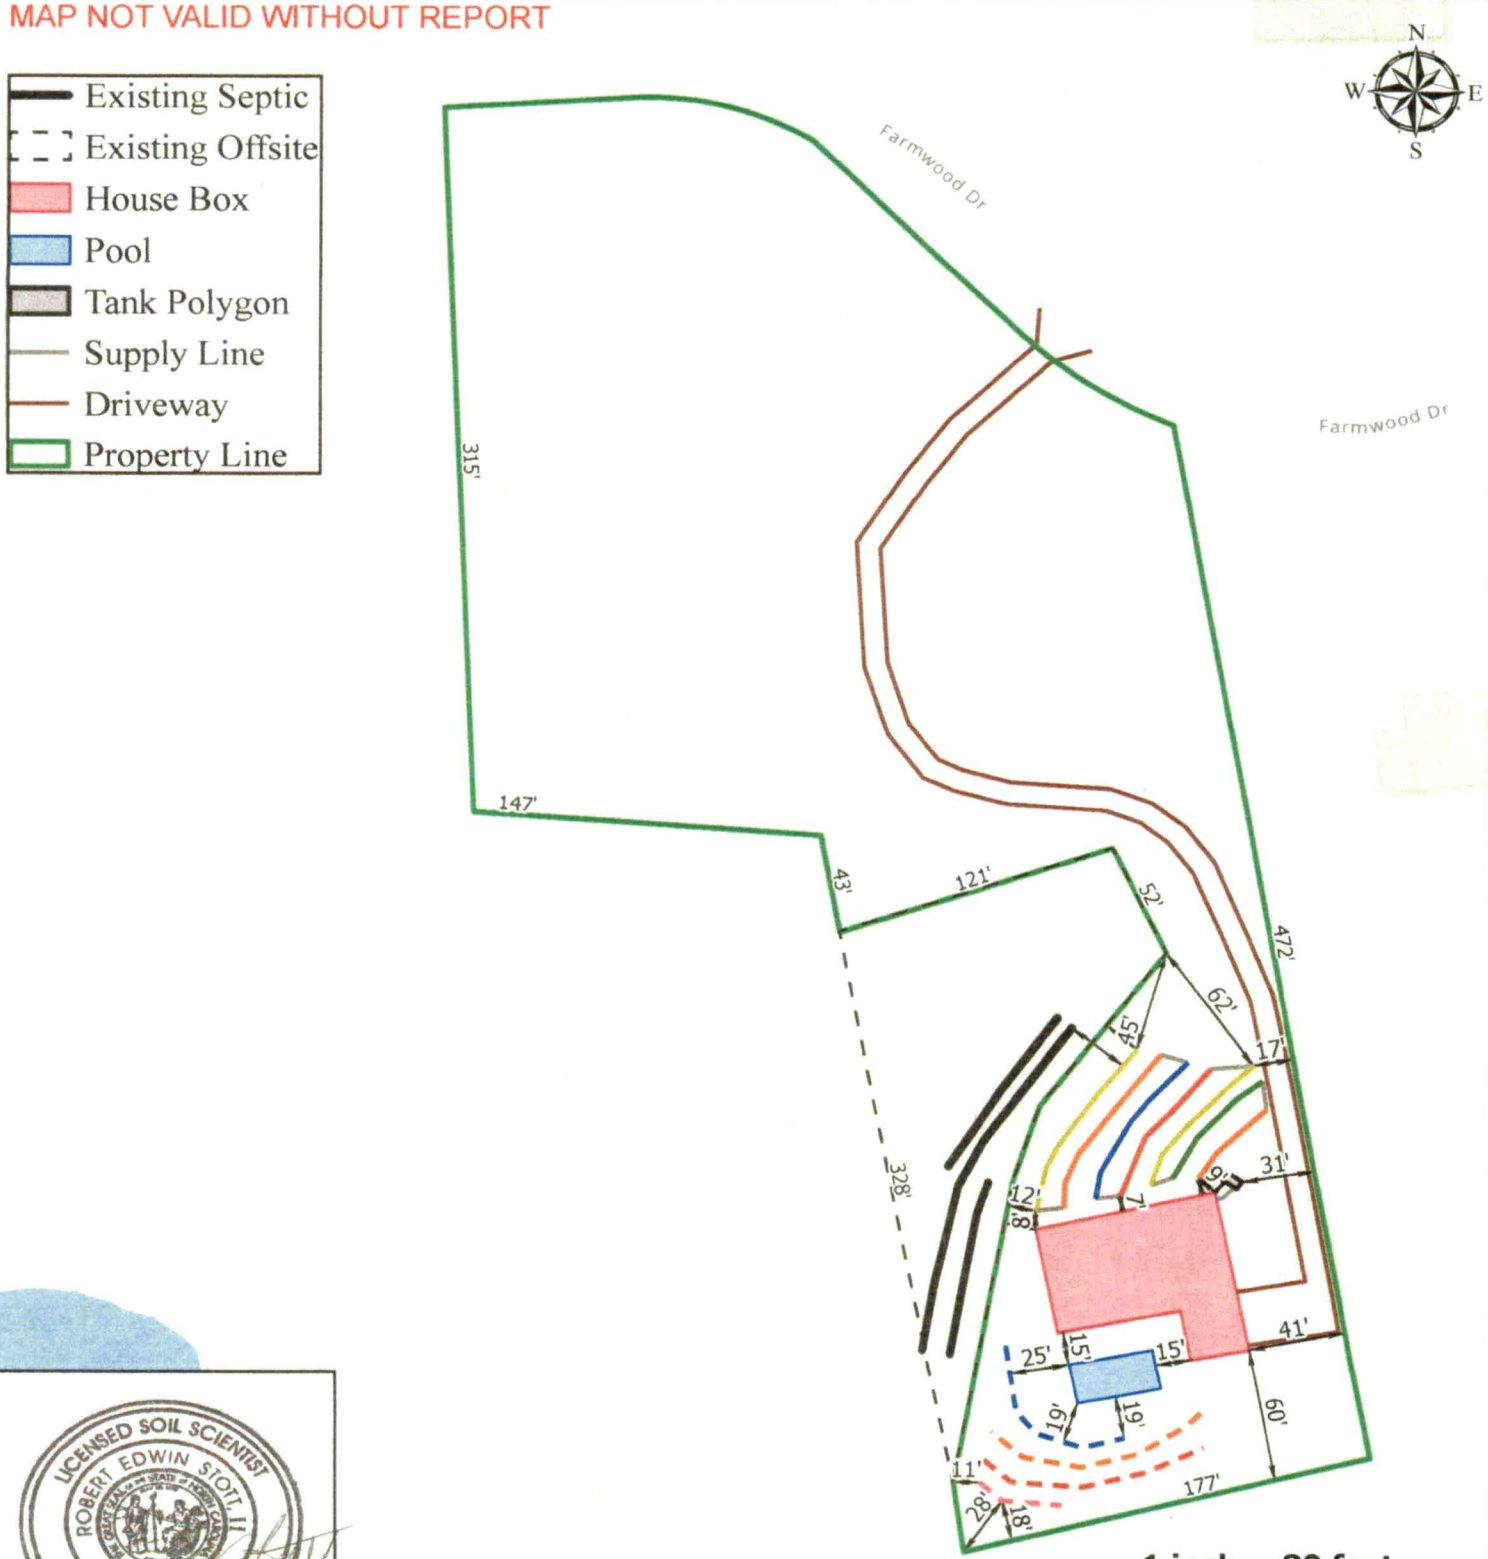

Esri Community Maps Co
DOT, © OpenStre
GeoTechnologies, Inc, METI/

LICENSED SOIL SCIENTIST
ROBERT EDWIN STOTT, II
1729
STATE OF NORTH CAROLINA

THIS IS NOT A SURVEY
DISTANCES & MEASUREMENTS
GENERATED USING GPS


PIEDMONT ENVIRONMENTAL ASSOCIATES, P.A.

Site Plan/Borings/Layout Diagram - 155 Farmwood Drive

216 S. Swing Rd. Suite 1
Greensboro, NC 27409
piedmontsoil.com

Job# 2827
Date: 08/24/2023
Client: Randy Chilton
County: Iredell

MAP NOT VALID WITHOUT REPORT

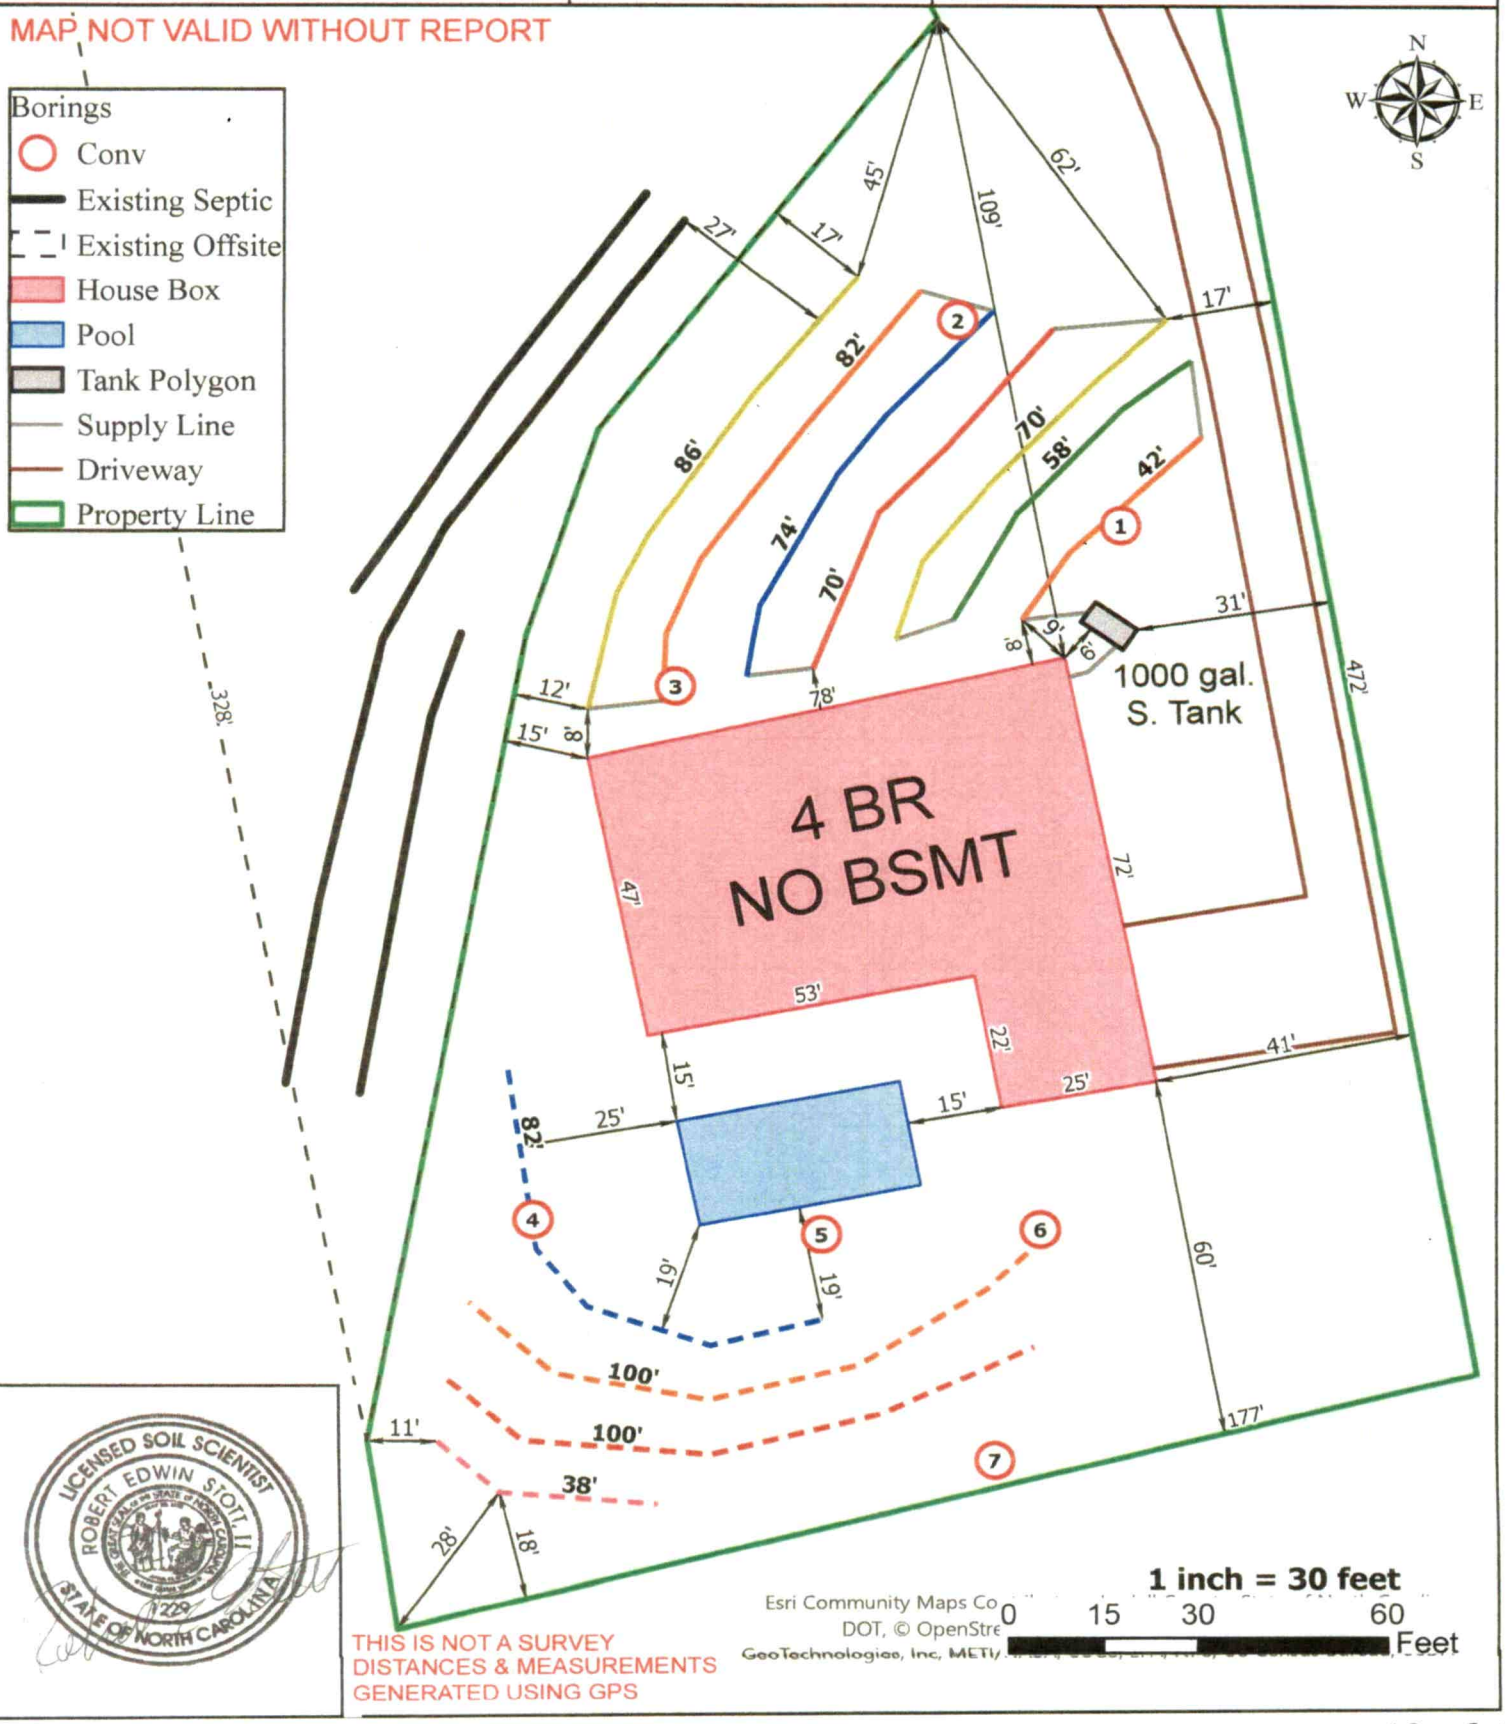

LICENSED SOIL SCIENTIST
ROBERT EDWIN STOTT, II
1229
STATE OF NORTH CAROLINA

THIS IS NOT A SURVEY
DISTANCES & MEASUREMENTS
GENERATED USING GPS

Esri Community Maps Co
DOT, © OpenStre
GeoTechnologies, Inc, METI/

Client:	Randy Chilton	Site Classification:	PS
Address/Lot #:	155 Farmwood Drive	Initial System:	IQ4 Chamber
Parcel#:	4764645330.000	Initial System LTAR:	0.25
DATE:	12/02/2021	Repair System:	Horiz. PPBPS (fill cap)
LSS:	R. Edwin Stott	Repair System LTAR:	0.25
Eval Method:	Auger	Others Present:	-
Facility/Flow:	4 BR/ 480 GPD	Water Supply:	Municipal

PIEDMONT ENVIRONMENTAL ASSOCIATES, P.A.

Number	UsableDep	LTAR	Boring Type	Horizon1	Horizon2	Horizon3	Horizon4	Landscape	Slope	Comment
1	48	0.275	Conv	0-3 scl dry	3-25 c f,s,p,bcky,se	25-48 scl/cl fr,ss,sp,wbcky,se		Ridge	12	
2	36	0.25	Conv	0-3 scl dry	3-36 c f,s,p,bcky,se	36-44 c f,s,sp,se MCD 2.5yr 6/1 mottles		Ridge	12	wetness
3	42	0.275	Conv	0-3 scl dry	3-25 c f,s,p,bcky,se	25-42 scl/cl fr,ss,sp,wbcky,se		Ridge	12	
4	46	0.3	Conv	0-3 scl dry	3-44 c fr,s,sp,bcky,se			Ridge	8	
5	42	0.25	Conv	0-3 scl dry	3-18 c f,s,p,bcky,se	18-31 BC1 scl f,ss,sp, bcky,se white kaoline	31-42 BC2 cl fr,ss,sp, wkbcky,se white kaoline	Ridge	5	
6	36	0.275	Conv	0-3 scl dry	3-18 c f,s,p,bcky,se	18-24 BC1 scl f,ss,sp, bcky,se white kaoline	24-36 BC2 cl fr,ss,sp, wkbcky,se white kaoline	Ridge	5	
7	30	0.25	Conv	0-5 sl	5-16 scl fr,ss,sp,wbcky,se	16-30 c fi,s,p,bcky,se		Ridge	6	wetness

Notes: Soil Wetness - Inches from land surface to free water or inches from land surface to soil colors with chroma 2 or less - Record Munsell color chip designation.
Classification - S - Suitable, PS - Provisionally Suitable, U - Unsuitable
LTAR - Long Term Acceptance Rate
Landscape Position: SU - summit, SH - shoulder, BS - backslope, FS - footslope, TS - toeslope, SS - sideslope, HS - headslope
Mineralogy: SE - slightly expansive, EXP - expansive

Comments/Conditions:

Septic System Layout Specifications

155 Farmwood Drive - Iredell County
Piedmont Environmental Associates Job # 2827

Facility/Design Flow: 4 BR Single Family Residence

PRIMARY LINE # Ref. Pt.	FLAG COLOR	ELEV.	DESIGN LINE LENGTH (ft)	CHAMBERS NEEDED
1	orange		42	10
2	green		58	14
3	yellow		70	17
4	red		70	17
5	blue		74	18
6	orange		82	20
7	yellow		86	21
8				
9				
10				
		Total:	482	117
		LTAR:	0.25	
		SYSTEM TYPE:	Accepted	
		DISTRIBUTION MEDIA:	IQ4 Chamber	
		DISTRIBUTION METHOD:	Gravity to Serial	

REPAIR LINE #	FLAG COLOR	ELEV.	DESIGN LINE LENGTH (ft)
1	blue		82
2	orange		100
3	red		100
4	pink		38
5			
6			
7			
8			
9			
10			
	Total:		320
	LTAR:		0.25
	SYSTEM TYPE:		Gravelless
	DISTRIBUTION MEDIA:		Horiz. PPBPS (fill cap)
	DISTRIBUTION METHOD:		Gravity to Serial

Notes:
**All measurements in feet.
**Soil evaluated by private LSS
**Nitrification lines are demonstrated on contour via colored pin flags.

I understand that the documentation and fees, as required in G.S. 130A-335(a2), (a3), (a5), and (a6), attached to this application are to be used to issue an Improvement Permit and/or Construction Authorization pursuant to G.S. 130A-335(a2),(a3), and (a5). I understand that authorized county and state officials are granted right of entry to the property indicated on this application to conduct necessary inspections to determine compliance with applicable laws and rules. I understand that if the information in the application for an Improvements Permit and/or Construction Authorization is falsified, changed, or the site is altered, then the Improvement Permit and Construction Authorization shall become invalid.

Applicant Signature: Randall T Chitty Date: 9-28-23

Owner's Signature: Randall T Chitty Date: 9-28-23