
PUMP TANK DESIGN

ATTACHMENT TO PROPERTY DESCRIPTION # 156313

TAX MAP # [illegible] 4766-94-892

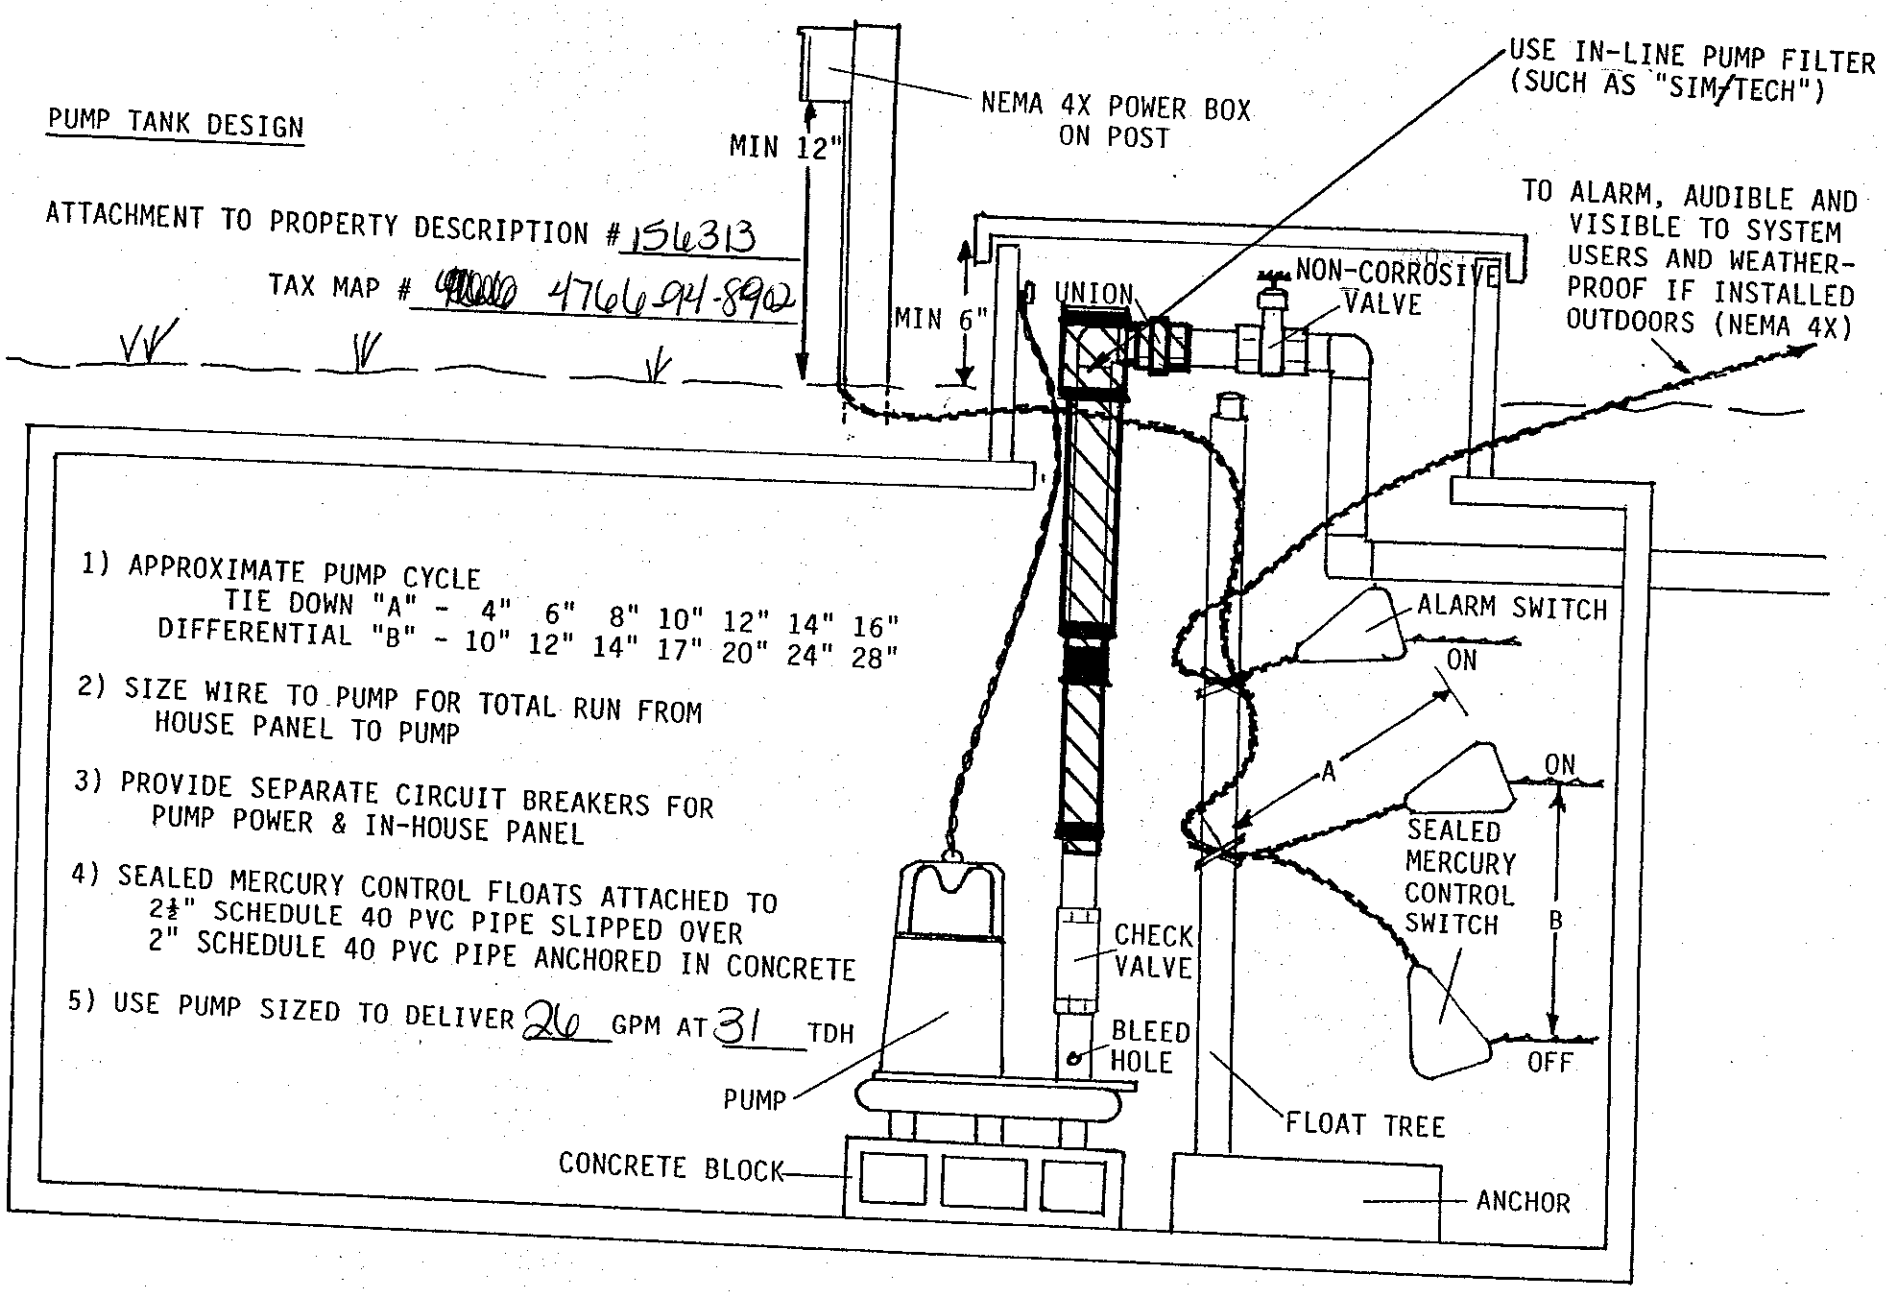


1) APPROXIMATE PUMP CYCLE
   TIE DOWN "A" - 4" 6" 8" 10" 12" 14" 16"
   DIFFERENTIAL "B" - 10" 12" 14" 17" 20" 24" 28"

2) SIZE WIRE TO PUMP FOR TOTAL RUN FROM HOUSE PANEL TO PUMP

3) PROVIDE SEPARATE CIRCUIT BREAKERS FOR PUMP POWER & IN-HOUSE PANEL

4) SEALED MERCURY CONTROL FLOATS ATTACHED TO 2½" SCHEDULE 40 PVC PIPE SLIPPED OVER 2" SCHEDULE 40 PVC PIPE ANCHORED IN CONCRETE

5) USE PUMP SIZED TO DELIVER 26 GPM AT 31 TDH

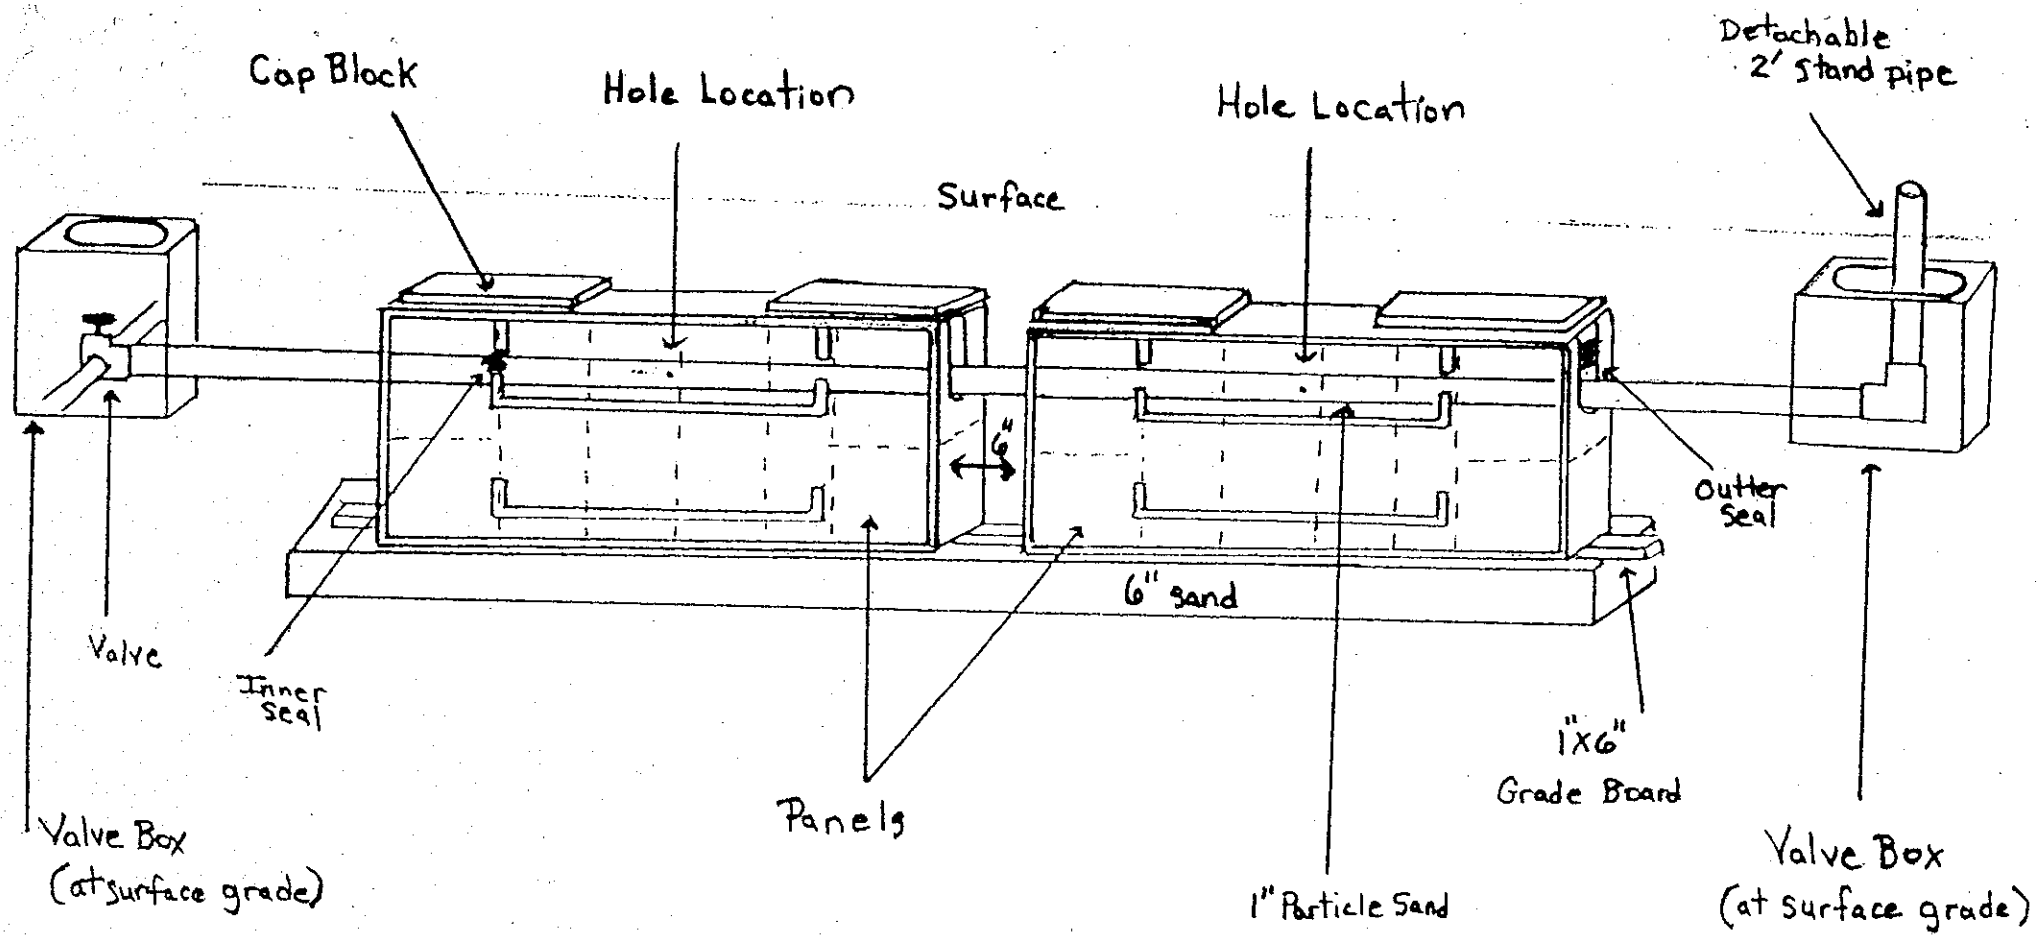

15613
4766 94 8902

Pressure Dosed PPBPS

# of panels 57.
Size holes 5/32. 1 hole per panel.
Approximate amount of sand needed 40.
100lbs. of partical sand per 8 panels.
Sidewalls raked and limed.
GPM 26.
TDH 31.

Comments