
1ST STORY

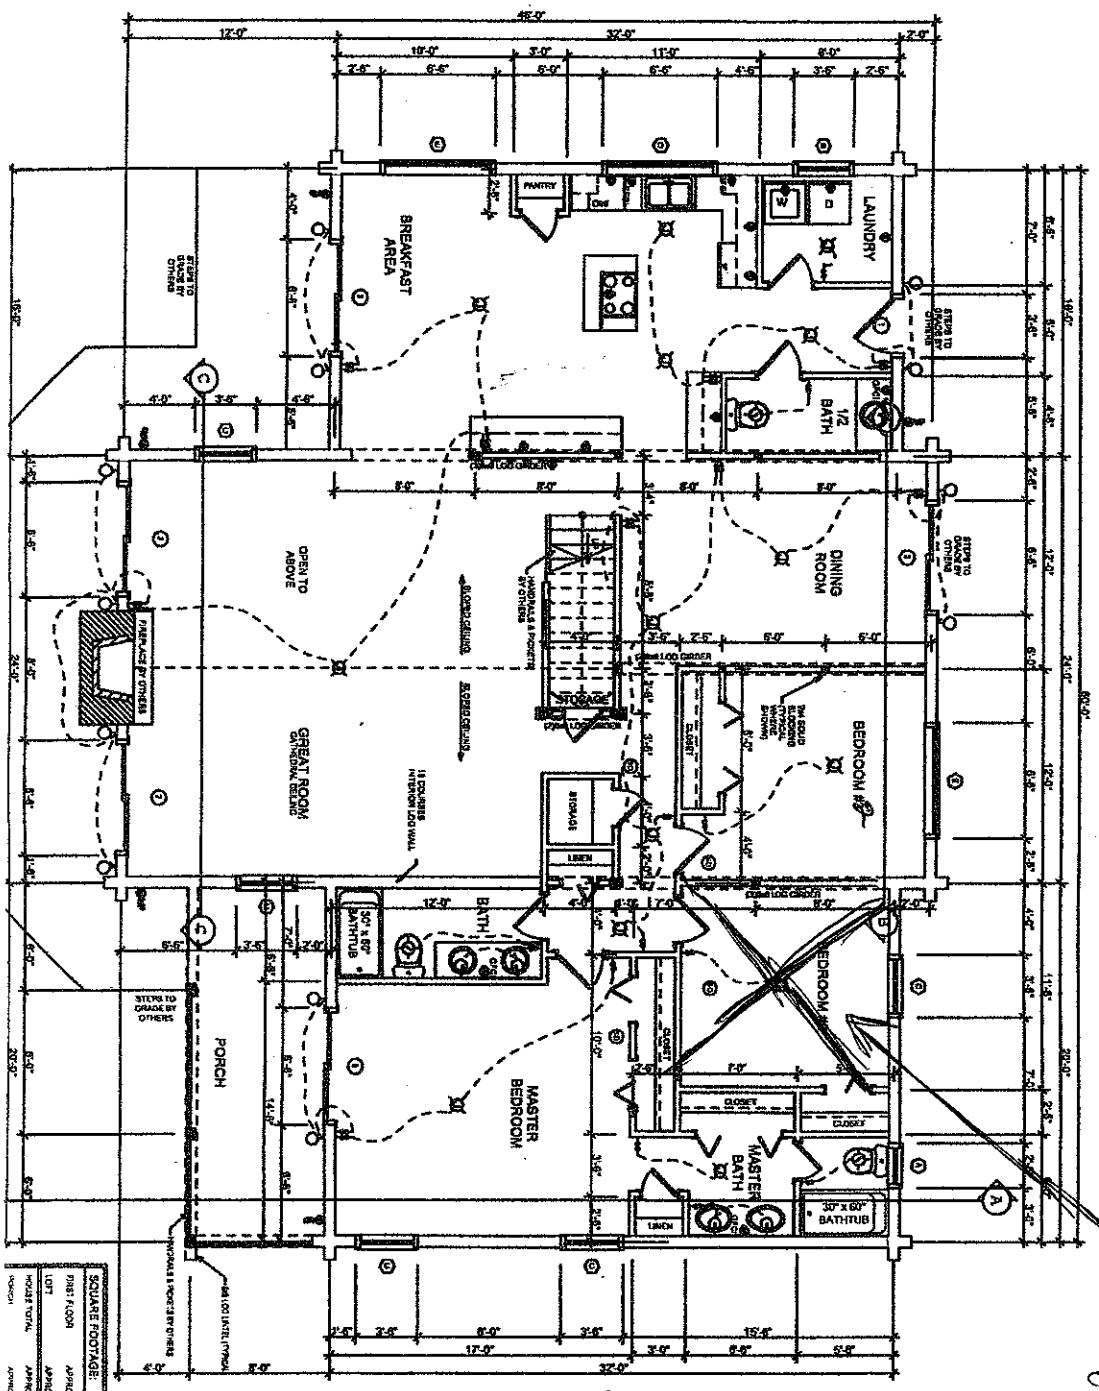

WINDOW SCHEDULE

MARK	SIZE	ROUGH OPENING	TYPE	QTY	REMARKS	PROVIDED BY
A	2'-0" x 3'-0"	2'-0" x 3'-0"	DH	1	WOOD SINGLE	SOUTHLAND
B	2'-0" x 4'-0"	2'-0" x 4'-0"	DH	1	WOOD SINGLE	SOUTHLAND
C	2'-0" x 4'-6"	2'-0" x 4'-6"	DH	5	WOOD SINGLE	SOUTHLAND
D	2'-6" x 4'-6"	2'-6" x 4'-6"	DH	1	WOOD SINGLE	SOUTHLAND
E	3'-0" x 4'-6"	3'-0" x 4'-6"	DH	1	WOOD SINGLE	SOUTHLAND
F	6'-1 1/8" x 4'-6 1/8"	6'-1 1/8" x 4'-6 1/8"	DH	1	WOOD TWIN	SOUTHLAND
G	3'-0" x 4'-6"	3'-0" x 4'-6"	DH	1	WOOD TWIN	SOUTHLAND

Ordered in 1254 PM 12/01

FIBERGLASS/GLASSBLOCK/FIBERGLASS WOOD ROUND FRENCH — 3'0"x5'6" — 1 — SOUTHLAND

SQUARE FOOTAGE:

FIRST FLOOR	APPROX.	2223 SQ. FT.
LOFT	APPROX.	0 SQ. FT.
HOUSE TOTAL	APPROX.	2223 SQ. FT.
GARAGE	APPROX.	0 SQ. FT.

STAIR TO 2nd FLOOR:

FLOOR LOADING = 40 PSF
1 PERSON @ 1'-0" EA.
1 PERSON @ 2'-0" EA.

GOING TO MAKE MASTER BEDROOM BIGGER & BATHROOM DOOR BIGGER & ELIMINATING BEDROOM #3

APPROVED 2 BEDROOM

Acknowledgement Of Plans Submittal ONLY!

Date 6-19-03

Date 6/20/03

NOTE:

1) BRACE PETERFRAME SHALL RECEIVE PRIMARY POWER FROM BUILDING ELECTRICAL SYSTEM AND SHALL BE EQUIPPED WITH BATTERY BACKUP DETECTION SHALL CUT LOW BATTERY SIGNAL

2) CONTRACTOR TO VERIFY ALL DIMENSIONS BEFORE BEGINNING CONSTRUCTION.

3) IS NECESSARY TO PREVENT EXCESSIVE MOISTURE OAK WOODS, INCLUDING ANY OTHER TYPE OF SO HEAT, IT IS IMPORTANT TO INCLUDE A HUMIDIFIER CONSTRUCTION TO PREVENT SHRINKING AND PLASTERING OF HUMIDIFIER UNITS.

4) SOUTHLAND LOG HOMES RECOMMENDS THAT GROVES SHOULD APPLY WATERPROOF CONDITIONER TO EXPOSED LOG WALL AREAS THAT ARE PREVENT WATER DAMAGE TO LOG WALLS AND FRAMING

5) UNLESS NOTED OTHERWISE, ALL INTERIOR 6"LO WALLS ARE NON-LOAD BEARING. FLOOR, ROOF, ROOF LOADS TO BE CARRIED ON LOG WALLS OR INTERIOR SUPPORT BEAMS

6) SQUARE FOOTAGES ARE BASED ON EXTERIOR GUIDELINES.

7) FLOOR LOADS ARE BASED ON A LIVE LOAD OF 30 PSF. LARGER GATHERING AREAS PER 2000 IRC/IBC CODE A TWO FAMILY CODE.

8) UNLESS OTHERWISE NOTED, ROOF LOADS ARE DESIGNED FOR 55 PSF LIVE LOAD AND 15 PSF DEAD LOAD.

OWNER IS RESPONSIBLE FOR ROUGH OPENINGS ON ALL EXTERIOR DOORS AND WINDOWS NOT PROVIDED BY SOUTHLAND. ROUGH OPENINGS ARE COMPLETED

NOTE:


1) FIELD VERIFY ALL DOOR AND WINDOW ROUGH OPENING WIDTHS WHEN STACKING LOGS

2) OPENINGS MAY NEED TO BE ADJUSTED BY OTHERS IF LOG SHRINKAGE OR LOSS MAY NEED TO BE CUT.

3) SOUTHLAND LOG HOMES ASSUMES NO RESPONSIBILITY OF THE CONSTRUCTION TO CUT OR ADJUST OPENINGS, IF REQUIRED.

BM LOG LINTEL
SWITCH
JUNCTION BOX
LIGHT
VENT-A-HOOD
CEILING FAN W/ LIGHT
OUTLET
220V OUTLET
WATER PROOF OUTLET
GFCI OUTLET
SMOKE DETECTOR

2ND STORY

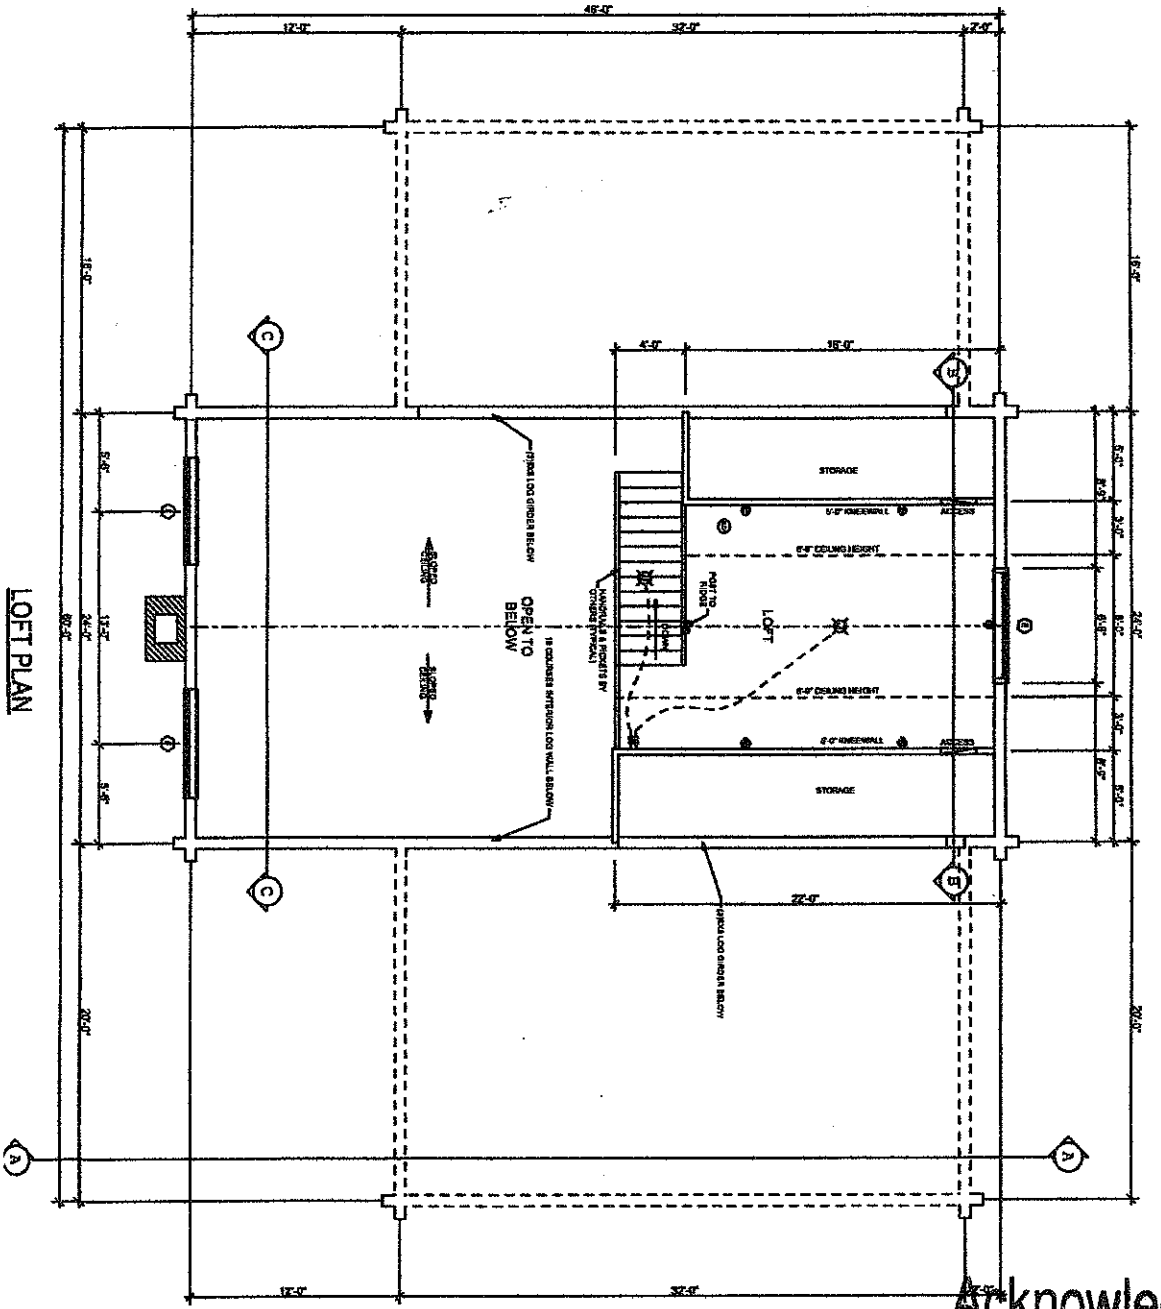

APPROVED
2 BEDROOM

Acknowledgement Of
Plans Submittal ONLY!

Date 6-1-9-05

Date 6/2/05

NOTE:

1) SMOKE DETECTORS SHALL RECEIVE PRIMARY POWER FROM BUILDING ELECTRICAL SYSTEM. DETECTORS SHALL EMIT LOW BATTERY SIGNAL.

2) CONTRACTOR TO VERIFY ALL DIMENSIONS BEFORE BEGINNING CONSTRUCTION.

3) MAINTAINING PROPER LEVELS OF RELATIVE HUMIDITY OF ANY WOOD PRODUCT, WHEN HEATING NATURAL GAS, WOOD, KEROSENE OR ANY OTHER TYPE OF DRY HEAT IS USED, IT IS NECESSARY TO ADD MOISTURE INTO YOUR HVAC SYSTEM. CONSULT YOUR HVAC CONTRACTOR REGARDING SIZE AND PLACEMENT OF HUMIDIFIER UNITS.

4) SOUTH LAND LOG HOMES RECOMMENDS THAT EXPOSED LOG WALLS BE PROTECTED FROM DIRECT EXPOSURE TO SUNLIGHT BY EITHER OVERHANGING ROOF SYSTEMS OR LOG WALL AWNINGS THAT ARE RE-COVERED BY TIMBERWORK ENGINEERED TO PROPERLY SHED WATER DAMAGE TO LOG WALLS AND FLOOR FRAMING.

5) UNLESS NOTED OTHERWISE, ALL INTERIOR STUD WALLS ARE NON-LOAD BEARING AND ARE DESIGNED TO BE SUPPORTED BY THE LOG STRUCTURE. ROOF LOADS ARE BASED ON SELF-SUPPORTING ROOF TRUSSES. ROOF LOADS TO BE CARRIED ON LOG WALLS OR INTERIOR SUPPORT BEAMS.

6) SQUARE FOOTAGES ARE BASED ON ANSI Z765 GUIDELINES.

7) FLOOR LOADS ARE BASED ON A LIVE LOAD OF: 40 PSF LIVING AREAS
30 PSF LIVE LOAD IN LIVING AREAS
PER 2000 RCW AND CODE A TWO FAMILY CODE

8) UNLESS OTHERWISE NOTED, ROOF LOADS ARE DESIGNED FOR 25 PSF LIVE LOAD AND 15 PSF DEAD LOAD.

OWNER IS RESPONSIBLE FOR ROUGH OPENINGS ON ALL EXTERIOR DOORS AND WINDOWS NOT PROVIDED BY SOUTHLAND LOG HOMES BEFORE FINAL PLANS ARE COMPLETED

NOTE:

1) STEEL VERIFY ALL DOOR AND WINDOW ROUGH OPENINGS WITH MANUFACTURER'S SPECIFICATIONS. OPENINGS MAY NEED TO BE ENLARGED BY EITHER ADJUSTING, ADDING OR CUTTING DOOR AND WINDOW BUCKS, OR LOGS MAY NEED TO BE CUT.

2) SOUTH LAND LOG HOMES TAKES EXTREME CARE TO ENSURE ACCURACY OF THE DIMENSIONS CONTAINED IN OUR PLANS. HOWEVER, IT IS THE OWNER'S RESPONSIBILITY TO CHECK AND ADJUST OPENINGS, IF REQUIRED.

