DEPARTMENT OF ENVIRONMENT AND NATURAL RESOURCES
DIVISION OF ENVIRONMENTAL HEALTH
ON-SITE WASTEWATER SECTION

4789-92-3263.001

Sheet 1 of 1
PROPERTY ID #:
COUNTY: Ire

SOIL/SITE EVALUATION
for ON-SITE WASTEWATER SYSTEM

OWNER: Toby J. Gallihar APPLICATION DATE 2-13-04
ADDRESS: 1678 Rimrock Rd Statesville 28625 DATE EVALUATED: 3/22/04
PROPOSED FACILITY: 3Br PROPOSED DESIGN FLOW (.1949): 360 PROPERTY SIZE: 3.0
LOCATION OF SITE: I-77 N EXIT 65 @ 901 @ Rimrock 1st drive on left PROPERTY RECORDED: No
WATER SUPPLY: ☐ Private ☑ Public ☐ Well ☐ Spring ☐ Other
EVALUATION METHOD: ☑ Auger Boring ☐ Pit ☐ Cut
TYPE OF WASTEWATER: ☑ Sewage ☐ Industrial Process ☐ Mixed

PROFILE #	.1940 LANDSCAPE POSITION/ SLOPE %	HORIZON DEPTH (IN.)	SOIL MORPHOLOGY (.1941) .1941 STRUCTURE/ TEXTURE	SOIL MORPHOLOGY (.1941) .1941 CONSISTENCE/ MINERALOGY	OTHER PROFILE FACTORS .1942 SOIL WETNESS/ COLOR	.1943 SOIL DEPTH	.1956 SAPRO CLASS	.1944 RESTR HORIZ	PROFILE CLASS & LTAR
1	L 4%	0-12	wk sbk scl	vfr ss/sp sexp	>48	>48	n/a	n/a	ps .25
		12-26	mo sbk/abk c	fi s/p sexp					
		26-48	mo sbk c+sap	fr s/p sexp					
2	L 7%	0-6	wk gr sl	vfr ns/np sexp	>48	>48	n/a	n/a	ps .25
		6-30	mo sbk c	fi s/p sexp					
		30-48	mo sbk/abk c+sap	fr s/p sexp					
3	L 4%	0-2	wk sbk scl	vfr ss/sp sexp	>48	>48	n/a	n/a	ps .25
		2-30	mo sbk/abk c	fi s/p sexp					
		30-48	mo sbk/abk c+sap	fr s/p sexp					
4	T 6%	0-15	wk sbk very coarse scl	vfr ss/sp sexp	>48	>48	n/a	n/a	ps .25
		15-30	mo sbk/abk c	fi s/p sexp					
		30-48	mo sbk c+sap	fr s/p sexp					

DESCRIPTION	INITIAL SYSTEM	REPAIR SYSTEM
Available Space (.1945)	ps	ps
System Type(s)	conventional gravity	ps mp 25% red
Site LTAR	.25 gpd/ft²	.25 gpd/ft²

OTHER FACTORS (.1946): none
SITE CLASSIFICATION (.1948): ps
EVALUATED BY: C.S.
OTHER(S) PRESENT: Toby Gallihar

COMMENTS:

LEGEND

use the following standard abbreviations

LANDSCAPE POSITION	GROUP	SOIL TEXTURE	CONVENTIONAL .1955 LTAR*	LPP .1957 LTAR*	MINERALOGY/ CONSISTENCE	STRUCTURE
CC (Concave Slope) CV (Convex Slope) D (Drainage Way) DS (Debris Slump) FP (Flood Plain) FS (Foot Slope) H (Head Slope) L (Linear Slope) N (Nose Slope) R (Ridge) S (Shoulder Slope) T (Terrace)	I	S (Sand) LS (Loamy Sand)	1.2 - 0.8	0.6 - 0.4	NEXP (Non-expansive) SEXP (Slightly Expansive) EXP (Expansive)	G (Single Grain) M (Massive) CR (Crumb) GR (Granular) SBK (Subangular Blocky) ABK (Angular Blocky) PL (Platy) PR (Prismatic)
	II	SL (Sandy Loam) L (Loam)	0.8 - 0.6	0.4 - 0.3		
	III	SCL (Sandy Clay Loam) SiL (Silt Loam) CL (Clay Loam) SiCL (Silty Clay Loam) Si (Silt)	0.6 - 0.3	0.3 - 0.15		
	IV	SC (Sandy Clay) SiC (Silty Clay) C (Clay) O (Organic)	0.4 - 0.1 None	0.2 - 0.05		

MOIST	WET
VFR (Very Friable)	NS (Non-sticky)
FR (Friable)	SS (Slightly Sticky)
FI (Firm)	S (Sticky)
VFI (Very Firm v. Very Sticky)	VS (Very Sticky)
EFI (Extremely Firm)	NP (Non-plastic)
	SP (Slightly Plastic)
	P (Plastic)
	VP (Very Plastic)

***Adjust LTAR due to depth, consistence, structure, soil wetness, landscape, position, wastewater flow and quality.**


NOTES

HORIZON DEPTH	In inches below natural soil surface
DEPTH OF FILL	In inches from land surface.
RESTRICTIVE HORIZON	Thickness and depth from land surface
SAPROLITE	S(suitable) or U(unsuitable)
SOIL WETNESS	Inches from land surface to free water or inches from land surface to soil colors with chroma 2 or less - record Munsell color chip designation
CLASSIFICATION	S (Suitable), PS (Provisionally Suitable), or U (Unsuitable)

Evaluation of saprolite shall be by pits.

Long-term Acceptance Rate (LTAR): gal/day/ft^2

Show profile locations and other site features (dimensions, reference or benchmark, and North).

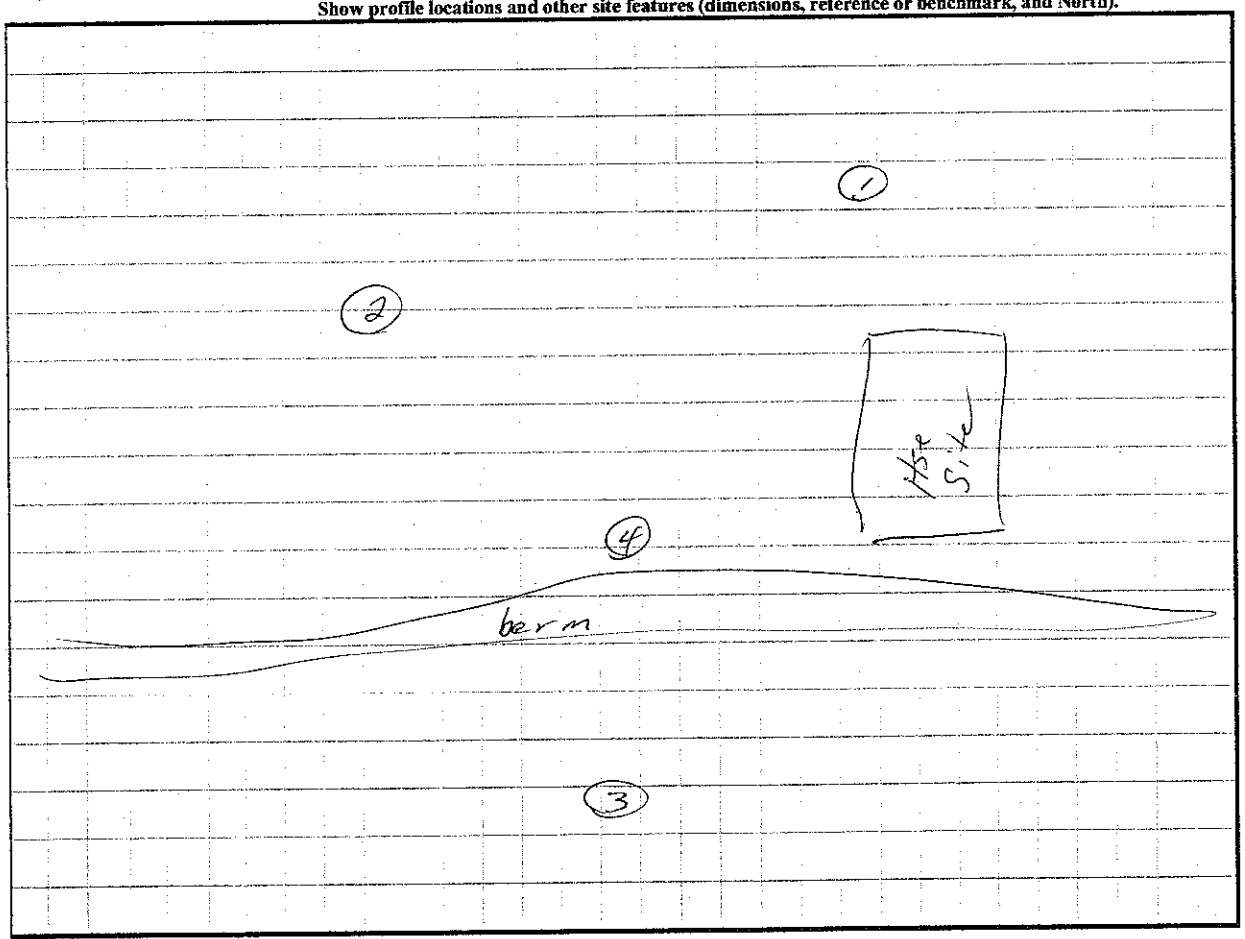

DENR (######)

Review (#####)