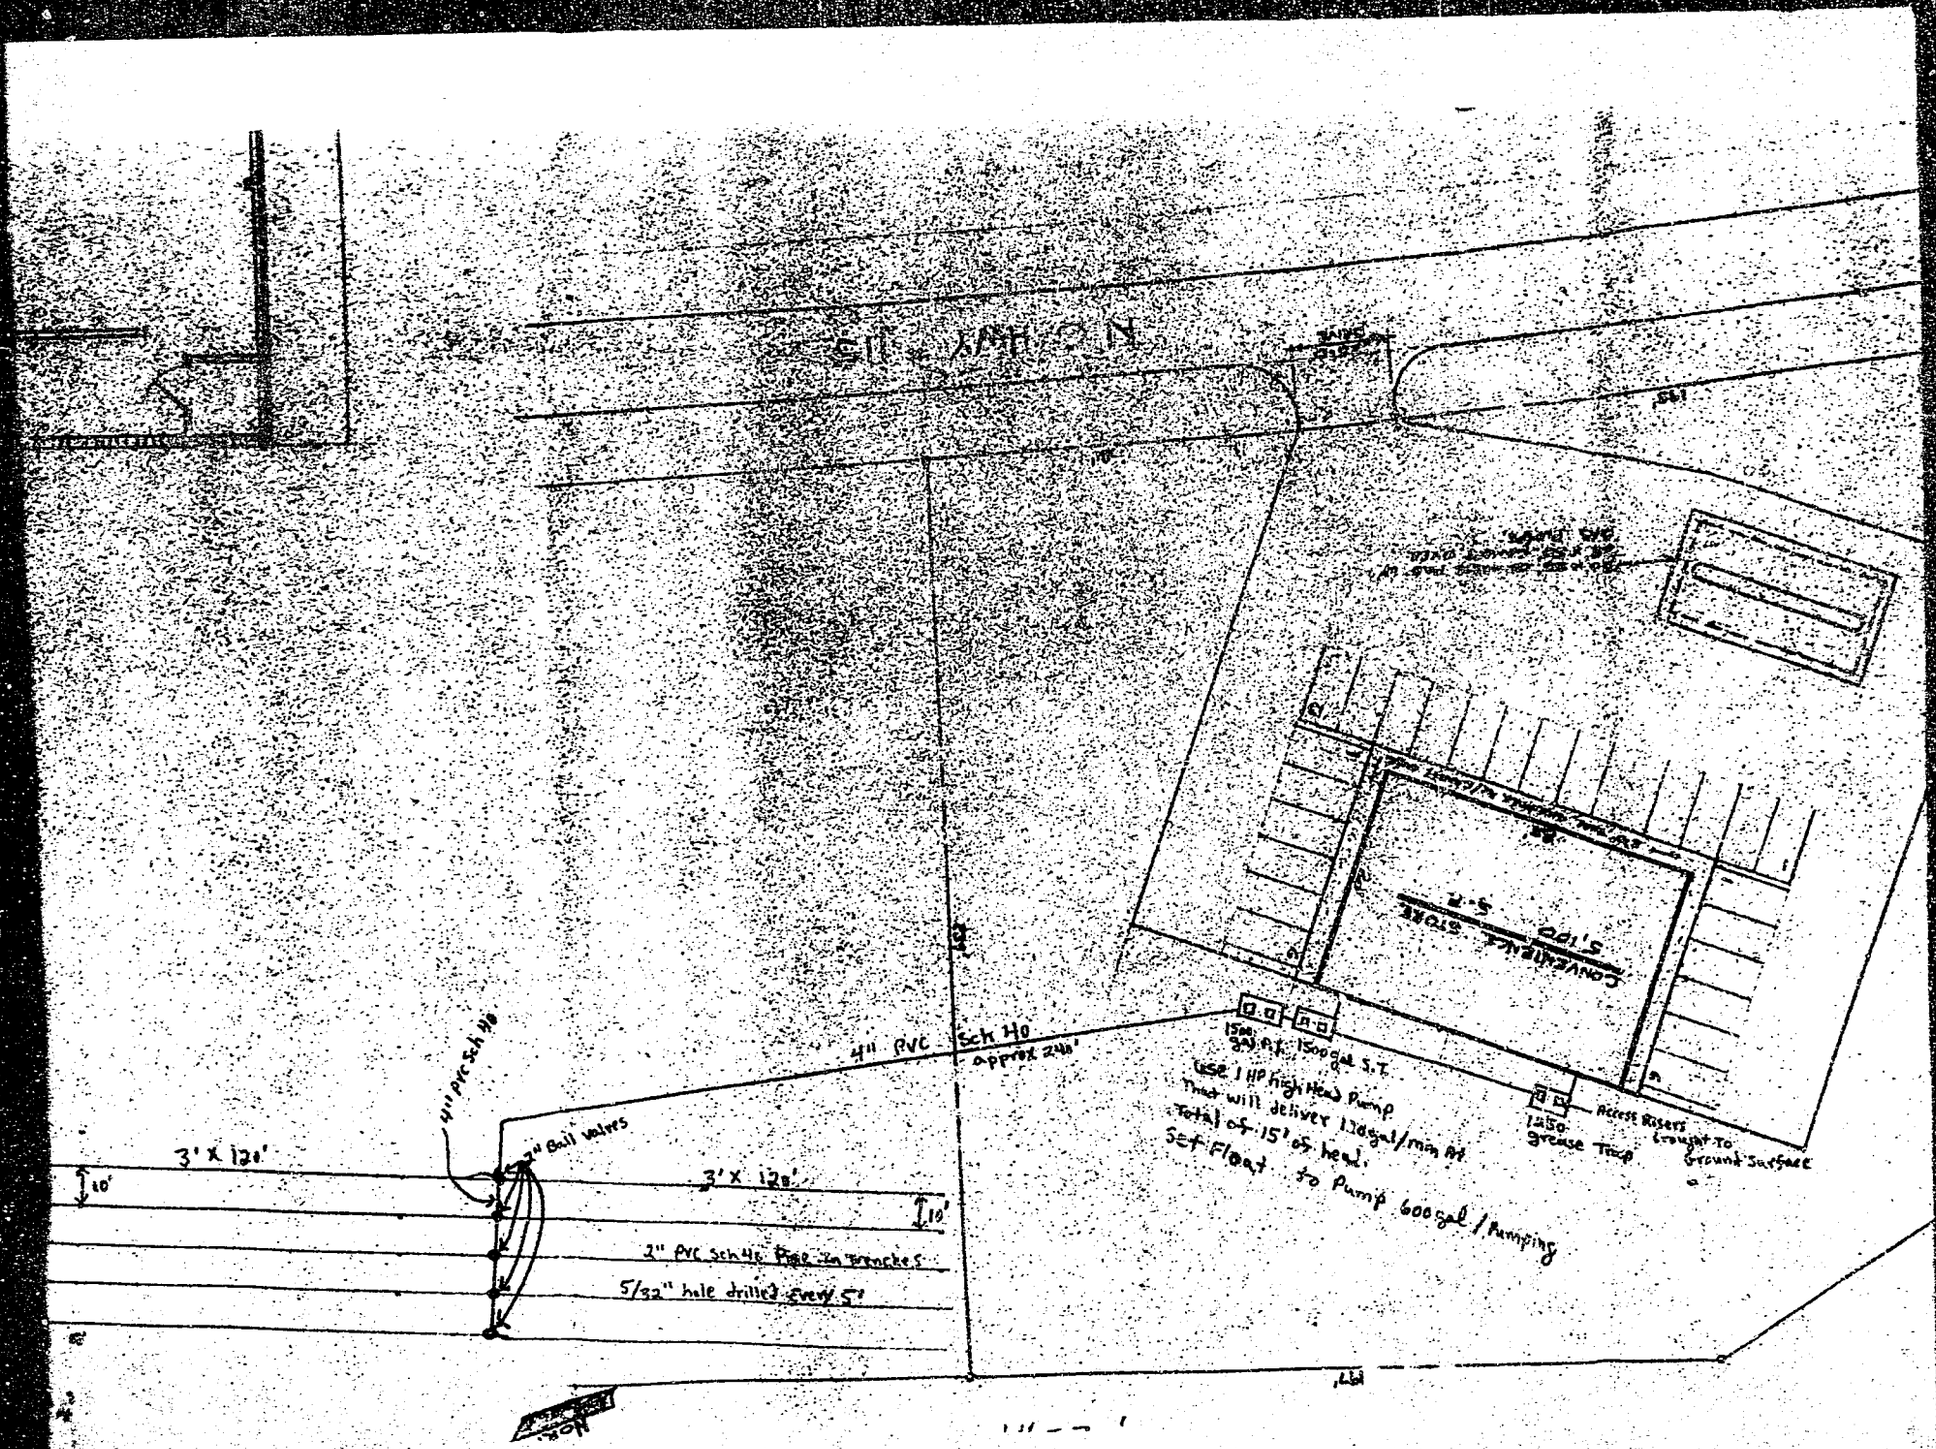

4" PVC Sch 40
approx 240'
4" PVC Sch 40
3" Ball valves
3' X 12'
10'
3' X 12'
10'
2" PVC Sch 40 Pipe in trenches
5/32" hole drilled every 5'
1500 gal S.T.
Use 1 HP High Head Pump
That will deliver 13 gal/min At
Total of 15' of Head.
Set Float to Pump 600 gal / Pumping
1250 gal Grease Trap
Access Risers brought to Ground Surface