DOOR SCHEDULE

Created at 8/4/1 AM 2/4/2004

MARK	SIZE	ROUGH OPENING	TYPE	QTY	REMARKS	PROVIDED BY
1	3-0 x 6-8	3'-2 1/2" x 6'-10 1/2"	EXT	1	Fiberglass 2 Panel 8 Lite Door-U	Southland
2	3-0 x 6-8	3'-2 1/2" x 6'-10 1/2"	EXT	1	Fiberglass Full View French Door	Southland

WINDOW SCHEDULE

Created at 8:40 AM 2/4/2004

MARK	SIZE	ROUGH OPENING	TYPE	QTY	REMARKS	PROVIDED BY
A	3-0 x 3-3	3'-2 1/2" x 3'-5 1/2"	DH	1	Wood Single	Southland
B	3-0 x 4-6	3'-2 1/2" x 4'-7 1/2"	DH	2	Wood Single	Southland
C	3-0 x 4-6	6'-3 1/8" x 4'-7 1/2"	DH	4	Wood Twin	Southland


HEATED AREAS:
FIRST FLOOR ..... 1165 Sq. Ft.
SECOND FLOOR ..... 512 Sq. Ft.
TOTAL HEATED ..... 1963 Sq. Ft.

UNHEATED AREAS:
PORCH ..... 448 Sq. Ft.
TOTAL UNHEATED ..... 448 Sq. Ft.


TOTAL UNDER ROOF ..... 2411 Sq. Ft.

STAIR TO 2nd FLOOR
9" FLOOR TO FLOOR = 8'-6 3/8"
24 RISERS @ 14- 7 5/16"
13 TREADS @ 10" MIN.

STOCKADE
SUPERIOR ITEMS ARE INCLUDED IN TITLEWORKS HOME PACKAGE

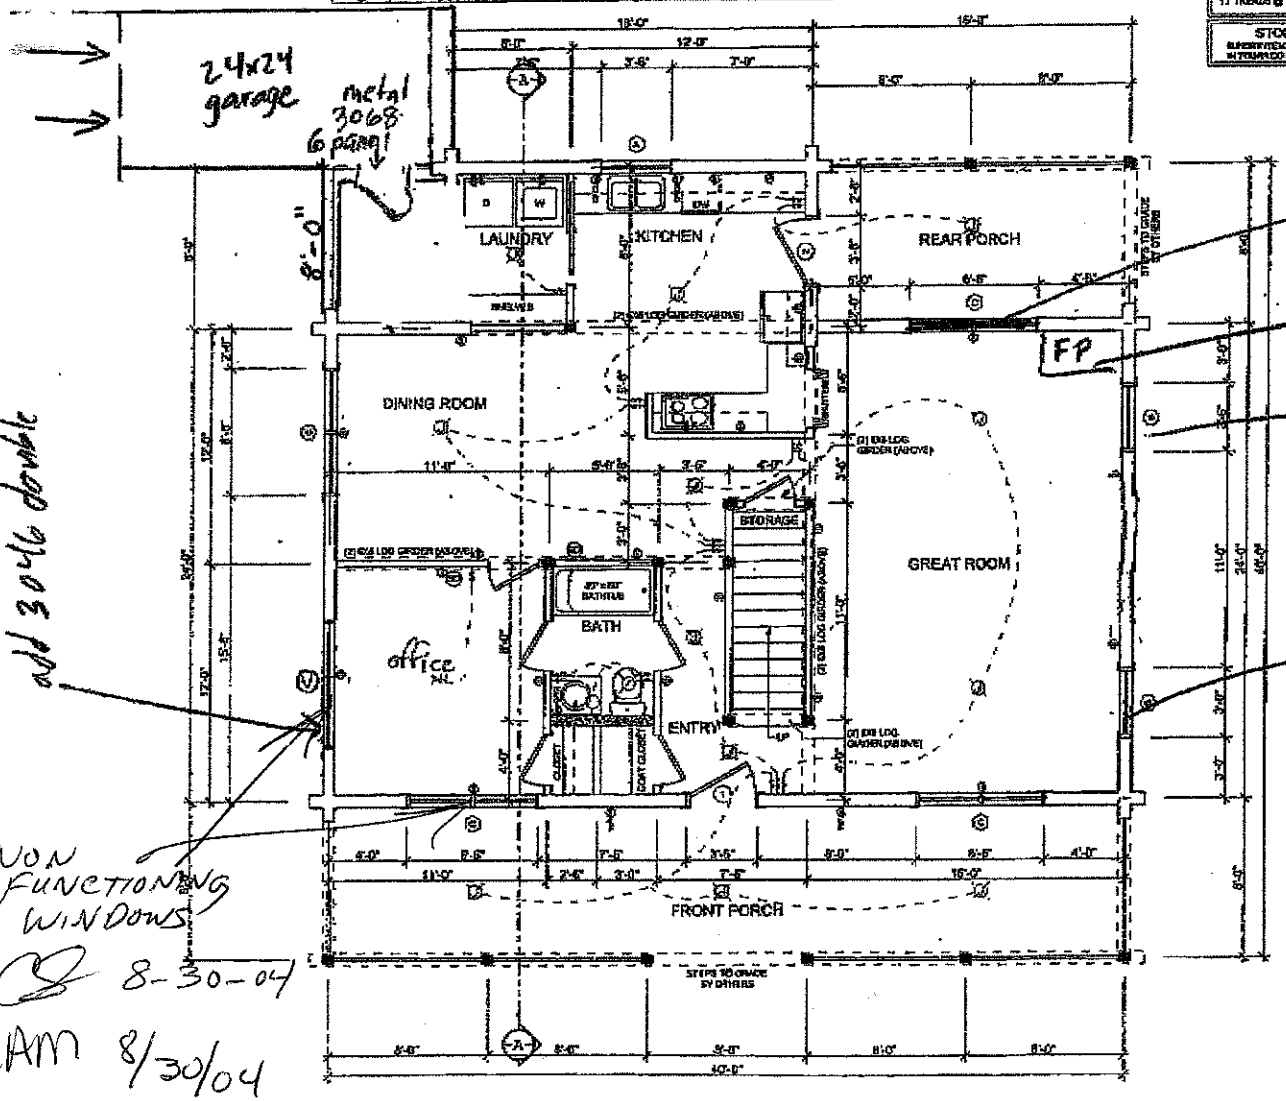

FIRST FLOOR PLAN

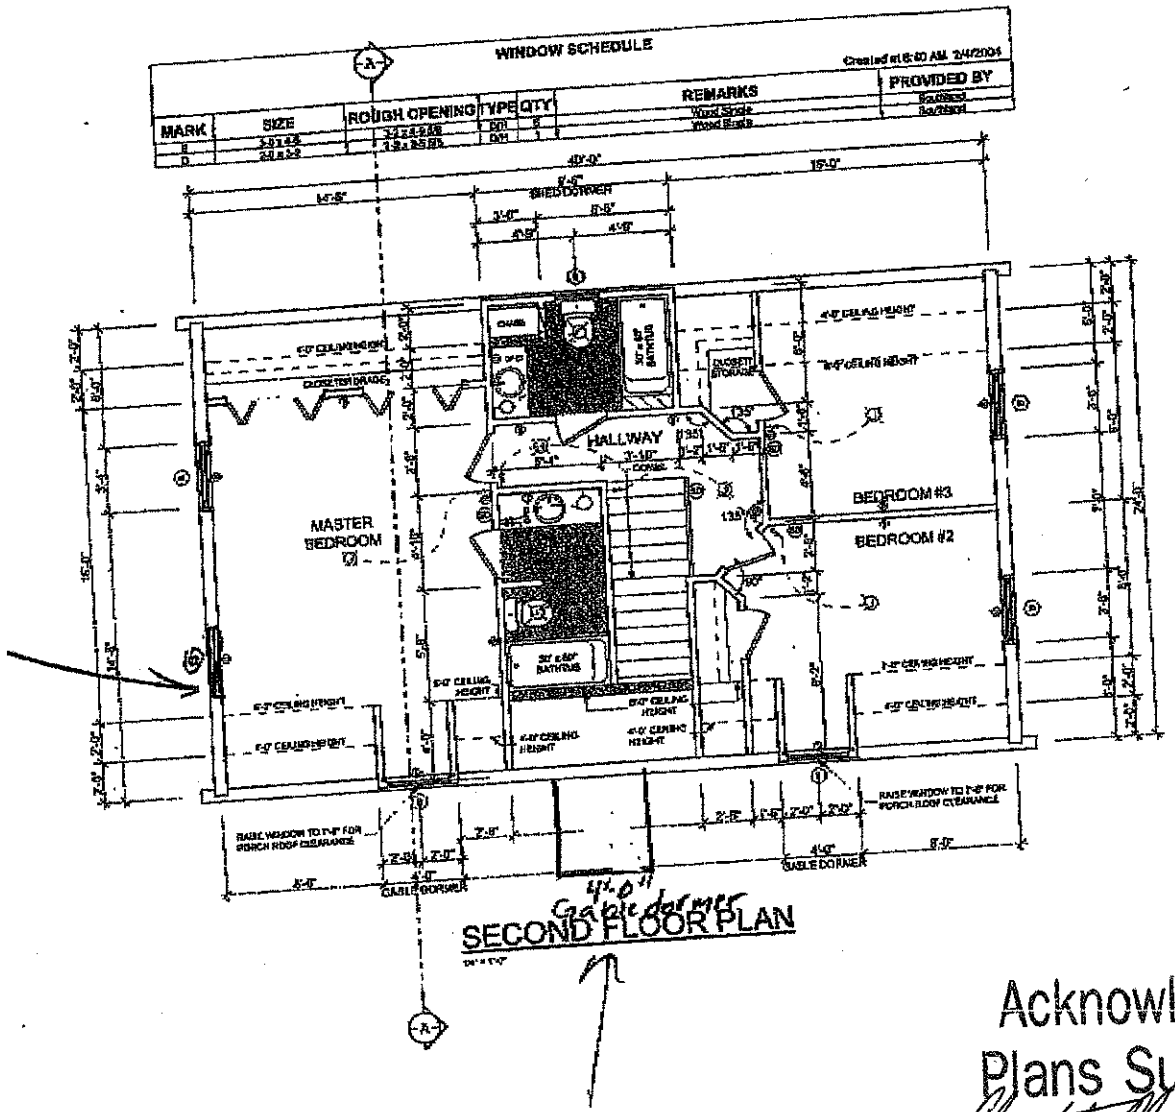

add 30 46 single

4'-0" Gable dormer



GENERAL FLOOR

1. LIVE LOADS ARE 40 PSF, DEAD LOADS ARE 10 PSF. DESIGN BASED ON ROOF LOADS TO BE 10 PSF UNDERSLOPE.
2. FLOOR LOADS ARE 40 PSF, DEAD LOADS ARE 10 PSF. LIVE LOADS ARE 40 PSF. DEAD LOADS ARE 10 PSF.
3. ALL BEAMS ARE TO BE SUPPORTED BY 2x6 @ 16" O.C. UNLESS OTHERWISE NOTED.
4. SMOKE DETECTORS SHALL BE POWERED FROM BUILDING WIRING AND SHALL BE EQUIPPED WITH BATTERY BACKUP. SMOKE DETECTORS SHALL BE INTERCONNECTED SUCH THAT THE ACTUATION OF ONE ALARM WILL ACTIVATE ALL THE ALARMS IN THE INDIVIDUAL UNIT.

Richland II

Acknowledgement Of
Plans Submittal ONLY!

Christopher M Shea Date 9-1-04

Cheryl Motley Date 9-9-04