LEGEND

use the following standard abbreviations

LANDSCAPE POSITION	GROUP	SOIL TEXTURE	CONVENTIONAL .1955 LTAR*	LPP .1957 LTAR*	MINERALOGY/ CONSISTENCE	STRUCTURE
CC (Concave Slope)						
CV (Convex Slope)	I	S (Sand)	1.2 - 0.8	0.6 - 0.4	NEXP (Non-expansive)	G (Single Grain)
D (Drainage Way)		LS (Loamy Sand)			SEXP (Slightly Expansive)	M (Massive)
DS (Debris Slump)					EXP (Expansive)	CR (Crumb)
FP (Flood Plain)	II	SL (Sandy Loam)	0.8 - 0.6	0.4 - 0.3		GR (Granular)
FS (Foot Slope)		L (Loam)				SBK (Subangular Blocky)
H (Head Slope)						ABK (Angular Blocky)
L (Linear Slope)	III	Si (Silt)	0.6 - 0.3	0.3 - 0.15		PL (Platy)
N (Nose Slope)		SiCL (Silty Clay Loam)				PR (Prismatic)
R (Ridge)		CL (Clay Loam)				
S (Shoulder Slope)		SCL (Sandy Clay Loam)			MOIST	WET
T (Terrace)		SiL (Silt Loam)				
	IV	SC (Sandy Clay)	0.4 - 0.1	0.2 - 0.05	VFR (Very Friable)	NS (Non-sticky)
		SiC (Silty Clay)			FR (Friable)	SS (Slightly Sticky)
		C (Clay)			FI (Firm)	S (Sticky)
		O (Organic)	None	None	VFI (Very Firm v. Very Sticky)	VS (Very Sticky)
					EFI (Extremely Firm)	NP (Non-plastic)
						SP (Slightly Plastic)
						P (Plastic)
						VP (Very Plastic)

*Adjust LTAR due to depth, consistence, structure, soil wetness, landscape, position, wastewater flow and quality.

NOTES

HORIZON DEPTH In inches below natural soil surface

DEPTH OF FILL In inches from land surface

RESTRICTIVE HORIZON Thickness and depth from land surface

SAPROLITE S(suitable) or U(unsuitable)


SOIL WETNESS Inches from land surface to free water or inches from land surface to soil colors with chroma 2 or less - record Munsell color chip designation

CLASSIFICATION S (Suitable), PS (Provisionally Suitable), or U (Unsuitable)

Evaluation of saprolite shall be by pits.

Long-term Acceptance Rate (LTAR): gal/day/ft²

Show profile locations and other site features (dimensions, reference or benchmark, and North).

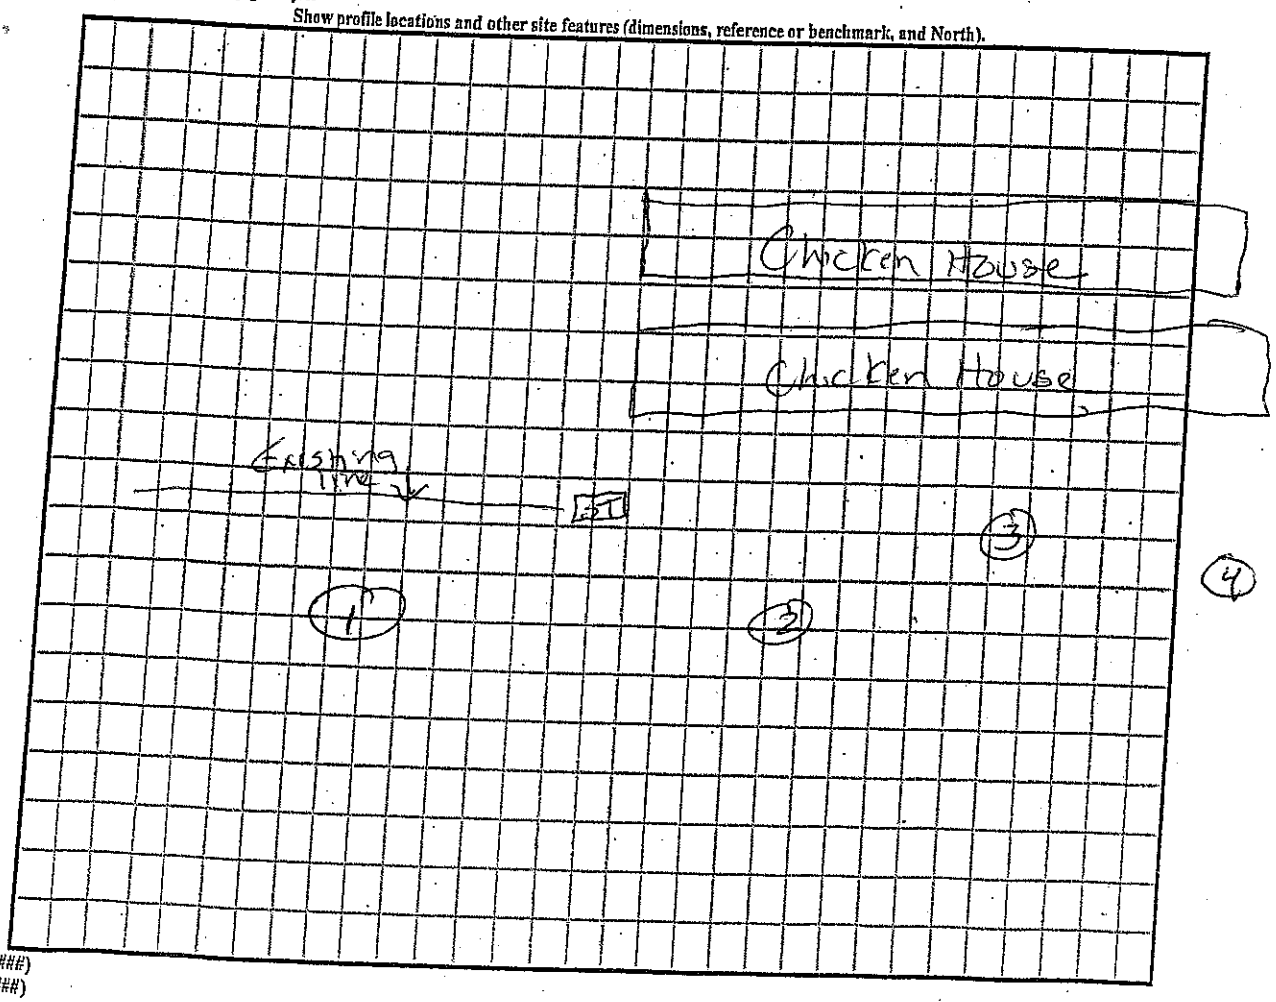

(#####)
(#####)