DOOR SCHEDULE			
NO.	QTY.	SIZE	TYPE
1	1	3'-0" x 8'-0"	FRONT DOOR
2	1	3'-0" x 8'-0"	EXTERIOR FRENCH DOOR
3	1	3'-0" x 8'-0"	EXTERIOR PANEL DOOR
4	2	2'-6" x 8'-0"	EXTERIOR PANEL DOOR
5	2	4'-0" x 8'-0"	INTERIOR DOUBLE PANEL DOOR
6	-	-	-
7	-	-	-
8	1	9'-0" x 8'-0"	GARAGE DOOR
9	1	16'-0" x 8'-0"	GARAGE DOOR
10	3	2'-6" x 8'-0"	INTERIOR PANEL DOOR
11	7	2'-6" x 8'-0"	INTERIOR PANEL DOOR
12	1	2'-6" x 8'-0"	INTERIOR POCKET DOOR
13	8	2'-6" x 8'-0"	INTERIOR PANEL DOOR
14	3	2'-0" x 8'-0"	INTERIOR PANEL DOOR

WINDOW SCHEDULE				
NO.	QTY.	SIZE	TYPE	LOCATION
A	1	PREASSEMBLED BAY UNIT w/6472 DS AND 1872 DH		BREAKFAST
B	1	PREASSEMBLED BAY UNIT w/2860-2 DH AND 1860 DH		BEDROOM 2
C	2	3624	DIRECT SET TRANSOM	GATHERING ROOM
D	1	2830	DIRECT SET	BEDROOM 1 CLOSET
E	4	2854	DOUBLE HUNG	LAUNDRY, HALL, MASTER BATH
F	2	2860	DOUBLE HUNG	LEARNING CENTER
G	10	2872	DOUBLE HUNG	GARAGE, MASTER BATH, MASTER, GATHERING ROOM, FOYER
H	2	2872-2	DOUBLE HUNG	OFFICE/STUDY, BEDROOM 1
I	1	2872-3	DOUBLE HUNG	DINING ROOM
J	1	3624	DIRECT SET TRANSOM	GATHERING ROOM
K	1	6424	DIRECT SET TRANSOM	GATHERING ROOM
L	1	6460	DIRECT SET	LEARNING CENTER
M	1	6472	DIRECT SET	GATHERING ROOM
N	1	1 ROW OF 4	GLASS BLOCK	MASTER CLOSET


2 / A2c SCHEDULES

DN SONIC MODE
TB TOWEL BAR
TR TOWEL RING
SD SOAP DISH
MR MIRROR
TP PAPER HOLDER
MC MEDICINE CAB
SS (S) SHELVES
SBS (S) SGD (S) SHELF

BUILDING CODE RELATED NOTES

STRICT COMPLIANCE WITH ALL PORTIONS OF VOLUME VII (RESIDENTIAL) OF THE NORTH CAROLINA BUILDING CODE, NOT JUST THOSE ITEM LISTED HERE, IS REQUIRED. ANY DISCREPANCIES BETWEEN THESE DRAWINGS AND THE CODE SHOULD BE BROUGHT TO THE ARCHITECTS IMMEDIATE ATTENTION.

1. PROVIDE A 20 MIN. FIRE RATED DOOR BETWEEN ANY PARKING GARAGE AND HABITABLE SPACES.
2. 5/8" CDX DRYWALL IN GARAGE @ ALL WALLS ABUTTING HABITABLE SPACES & @ CEILING, TAPE & FINISH FOR PAINTING.
3. EXTERIOR STEPS - MAXIMUM RISER - 7 1/2" MINIMUM TREAD - 11" (W/ NO NOSING) HAS RISERS IF 4) OR MORE RISERS MOUNT 30" TO 34" ABV TREAD NOSING BALUSTER SPACING - 4" MAX
4. INTERIOR STEPS - MAXIMUM RISER - 7 1/2" MINIMUM TREAD - 10" (W/ 1" NOSING) HAS RISERS IF 4) OR MORE RISERS MOUNT 30" TO 34" ABV TREAD NOSING BALUSTER SPACING - 4" MAX
5. BALCONY RAILING IS REQUIRED IF OVER 30" ABV. ADJ. GRADE MIN. 36" HIGH, BALUSTER SPACING - 4" MAX.
6. USE TEMPERED WINDOW GLASS IN BATHS IF OVER TUBS.
7. ATTIC ACCESS
8. WALL ASSEMBLY MIN. R15 w/ R13 BATTS
9. CRAWLSPACE/FLOOR ASSEMBLY MIN. R19 BATTS
10. CEILING/ATTIC ASSEMBLY MIN. R30 BATTS OR R30 BLOW-IN

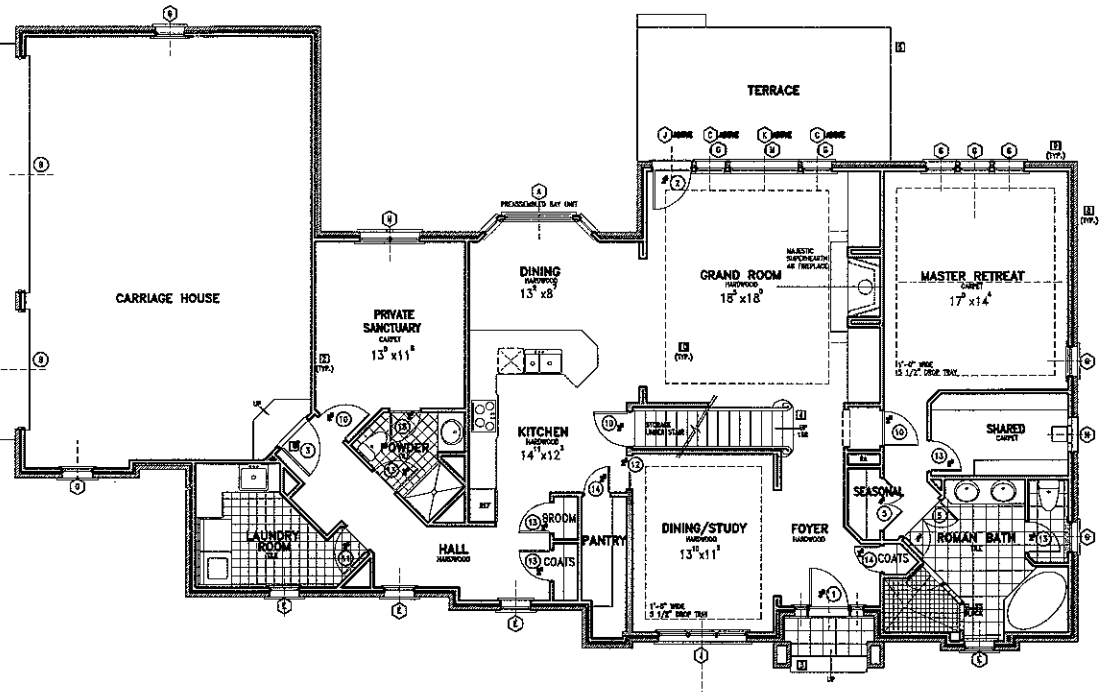

Acknowledgement Of
Plans Submittal ONLY!
Date
Date 2/6/03

1 / A2c FIRST FLOOR PLAN
1/4 = 1'-0"


GIBLIN ARCHITECTURE
50705
PROFESSIONAL ENGINEER

a new residence for :
lakeland luxury lot 35 the point

DATE: JAN 14, 2003 REVISED:

FIRST FLOOR PLAN

A2

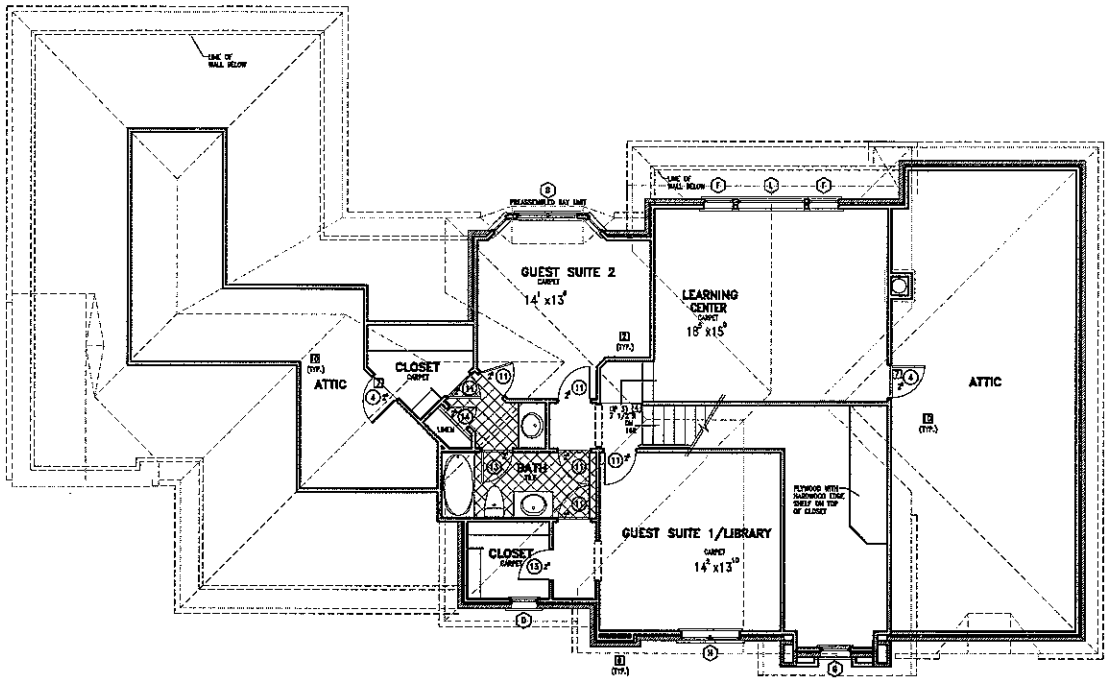

BR WORK DESK
TB TOWEL BAR
TR TOWEL RING
SD SOAP DISH
MR MIRROR
TP TOILET HOLDER
MC MEDICINE CAB
SS (S) SHELVES
WIRE (1) ROD (1) SHELF

BUILDING CODE RELATED NOTES

STRICT COMPLIANCE WITH ALL PORTIONS OF VOLUME VIII (RESIDENTIAL) OF THE NORTH CAROLINA BUILDING CODE, NOT JUST THOSE ITEM LISTED HERE, IS REQUIRED. ANY DISCREPANCIES BETWEEN THESE DRAWINGS AND THE CODE SHOULD BE BROUGHT TO THE ARCHITECTS IMMEDIATE ATTENTION.

1. PROVIDE A 20 MIN. FIRE RATED DOOR BETWEEN ANY PARKING GARAGE AND HABITABLE SPACES.
2. 5/8" CDX DRYWALL IN GARAGE @ ALL WALLS ADJOINING HABITABLE SPACES & @ CEILING, TAPE & FINISH FOR PAINTING.
3. EXTERIOR STEPS - MAXIMUM RISER - 7 1/2" MINIMUM TREAD - 11" (W/ NO NOSING) RAIL REQ'D IF 4 OR MORE RISERS MOUNT 30" TO 34" ABV TREAD NOSING BALUSTER SPACING - 4" MAX
4. INTERIOR STEPS - MAXIMUM RISER - 7 1/2" MINIMUM TREAD - 10" (W/ 1" NOSING) RAIL REQ'D IF 4 OR MORE RISERS MOUNT 30" TO 34" ABV TREAD NOSING BALUSTER SPACING - 4" MAX
5. BALCONY RAILING IS REQUIRED IF OVER 30" ABV. ADJ. GRADE MIN. 36" HIGH, BALUSTER SPACING - 4" MAX.
6. USE TEMPERED WINDOW GLASS IN BATHS IF OVER TUBS.
7. ATTIC ACCESS
8. WALL ASSEMBLY MIN. R13 w/ R13 BATTS
9. CRAWLSPACE/FLOOR ASSEMBLY MIN. R17 BATTS
10. CEILING/ATTIC ASSEMBLY MIN. R30 BATTS OR R30 BLOW-IN

Acknowledgement Of
Plans Submittal ONLY!
Date 2-6-03
Date 2/6/03

1 A2b SECOND FLOOR PLAN
1/4" = 1'-0"

GIBLIN ARCHITECTURE
50705

a new residence for :
lakeland luxury lot 35 the point

DATE: JAN. 14, 2003 REVISED:
SECOND FLOOR PLAN

A2