
49

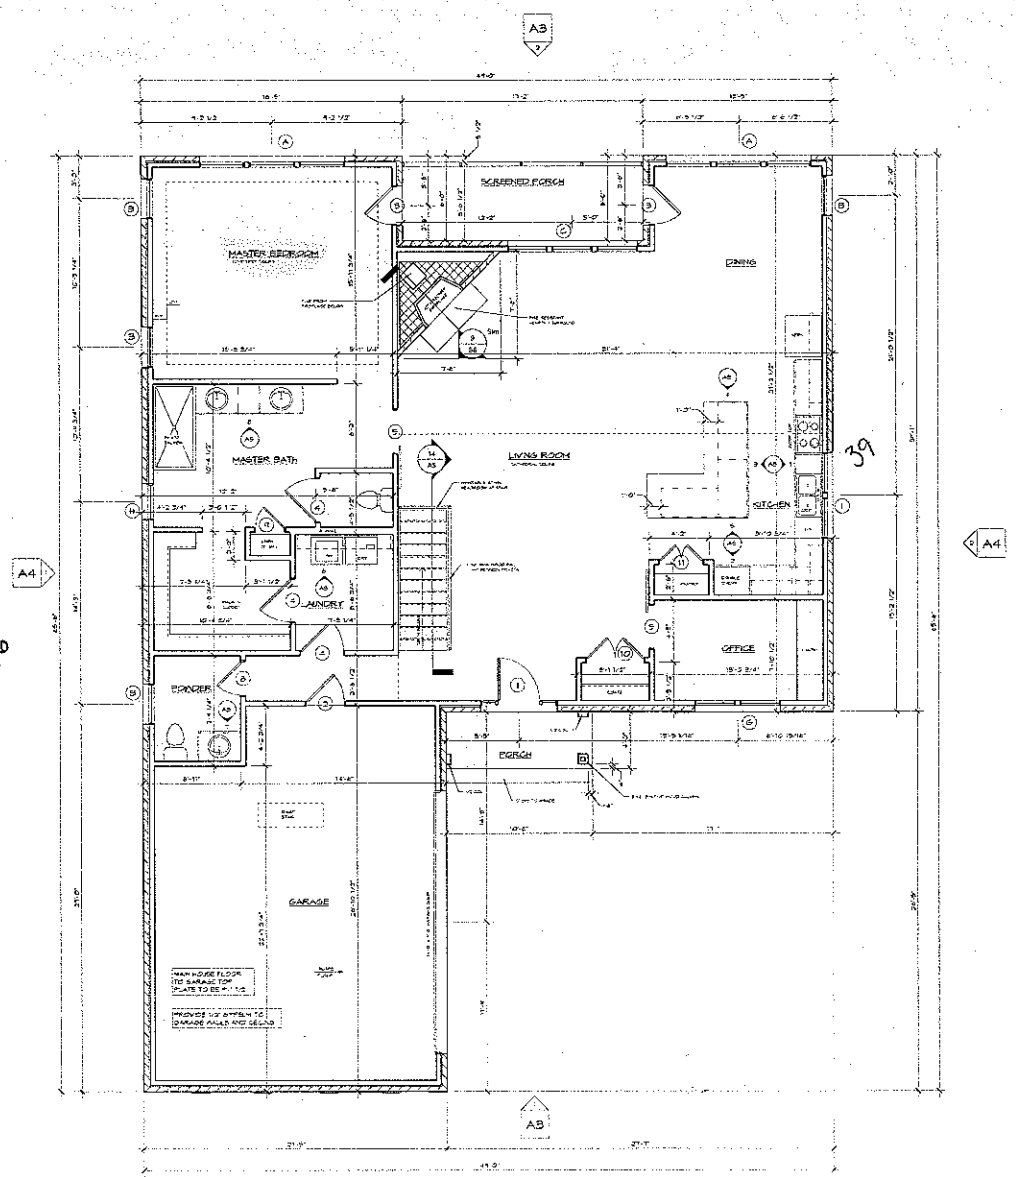

66

39

1 FIRST FLOOR PLAN
1/4" = 1'-0"

DOOR SCHEDULE				
	DOOR SIZE			
TYPE	WIDTH	HEIGHT	THK.	DESCRIPTION
1	3'-0"	8'-0"	1 3/4"	W/ 12" SIDELIGHTS, SEE FRONT ELEVATION
2	2'-8"	8'-0"	1 3/4"	20 MINUTE RATED
3	2'-8"	8'-0"	1 3/4"	FIFTEEN LIGHT
4	3'-0"	6'-8"	1 3/8"	4 PANEL
5	8'-0"	6'-8"	1 3/8"	SLIDING BARN DOOR
6	2'-8"	6'-8"	1 3/8"	4 PANEL
7	2'-8"	6'-8"	1 3/8"	4 PANEL
9	2'-4"	6'-8"	1 3/8"	4 PANEL
9	2'-0"	6'-8"	1 3/8"	4 PANEL
10	(2) 2'-0"	6'-8"	1 3/8"	4 PANEL, BI-HINGE
11	(2) 1'-8"	6'-8"	1 3/8"	2 PANEL, BI-HINGE

WINDOW SCHEDULE			
	WINDOW SIZE		
TYPE	WIDTH	HEIGHT	DESCRIPTION
A	(5) 3'-0"	5'-2"	DOUBLE-HUNG
B	2'-8"	5'-2"	DOUBLE-HUNG
C	(5) 2'-8"	6'-2"	DOUBLE-HUNG
D	(3) 3'-0"	5'-2"	DOUBLE-HUNG
E	2'-8"	5'-2"	DOUBLE-HUNG
F	(2) 2'-8"	5'-2"	DOUBLE-HUNG
G	(2) 2'-8"	3'-10"	DOUBLE-HUNG
H	2'-4"	3'-10"	DOUBLE-HUNG
I	(2) 2'-8"	3'-2"	DOUBLE-HUNG

Acknowledgement Of Plans Submittal ONLY!

APPROVED Date FEB 23 2015

Kathleen Saunders Date 2-11-15

AREA SCHEDULE	
NAME	AREA
GARAGE	575 SF
1ST FLOOR HEATED	1835 SF
FRONT PORCH	42 SF
SCREENED PORCH	102 SF
BASEMENT HEATED	1835 SF
REAR PATIO	102 SF
TOTAL AREA	4460 SF


GENERAL NOTES:
1. CONTRACTOR TO VERIFY ALL DIMENSIONS.
2. DO NOT SCALE DRAWINGS. FROM PRINTS. PLANS AND DETAILS ARE NOT ALWAYS DRAWN TO SCALE. USE DIMENSIONS GIVEN OR CONSULT DESIGNER FOR FURTHER CLARIFICATION.
3. ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE 2012 NORTH CAROLINA RESIDENTIAL CODES AND LOCAL BUILDING CODES.
4. SHAPE ELEVATIONS MAY VARY DUE TO TYPE OF FOUNDATION AND OTHER SITE CONSIDERATIONS.
5. FLOOR TO TOP PLATE FIRST FLOOR = 9'-1 1/2"
6. FLOOR TO UNDER HEAD FIRST FLOOR = 7'-0"

CEILING NOTES:
1. ALL EXTERIOR CEILINGS ARE TO BE 1/2" EXTERIOR SHEATHING.
2. ALL INTERIOR CEILINGS ARE TO BE 1/2" GYP. BD.

Custom Residence For:
The Robinson Family

Tina Home Design, LLC
Residential Design & Drafting Services

A2

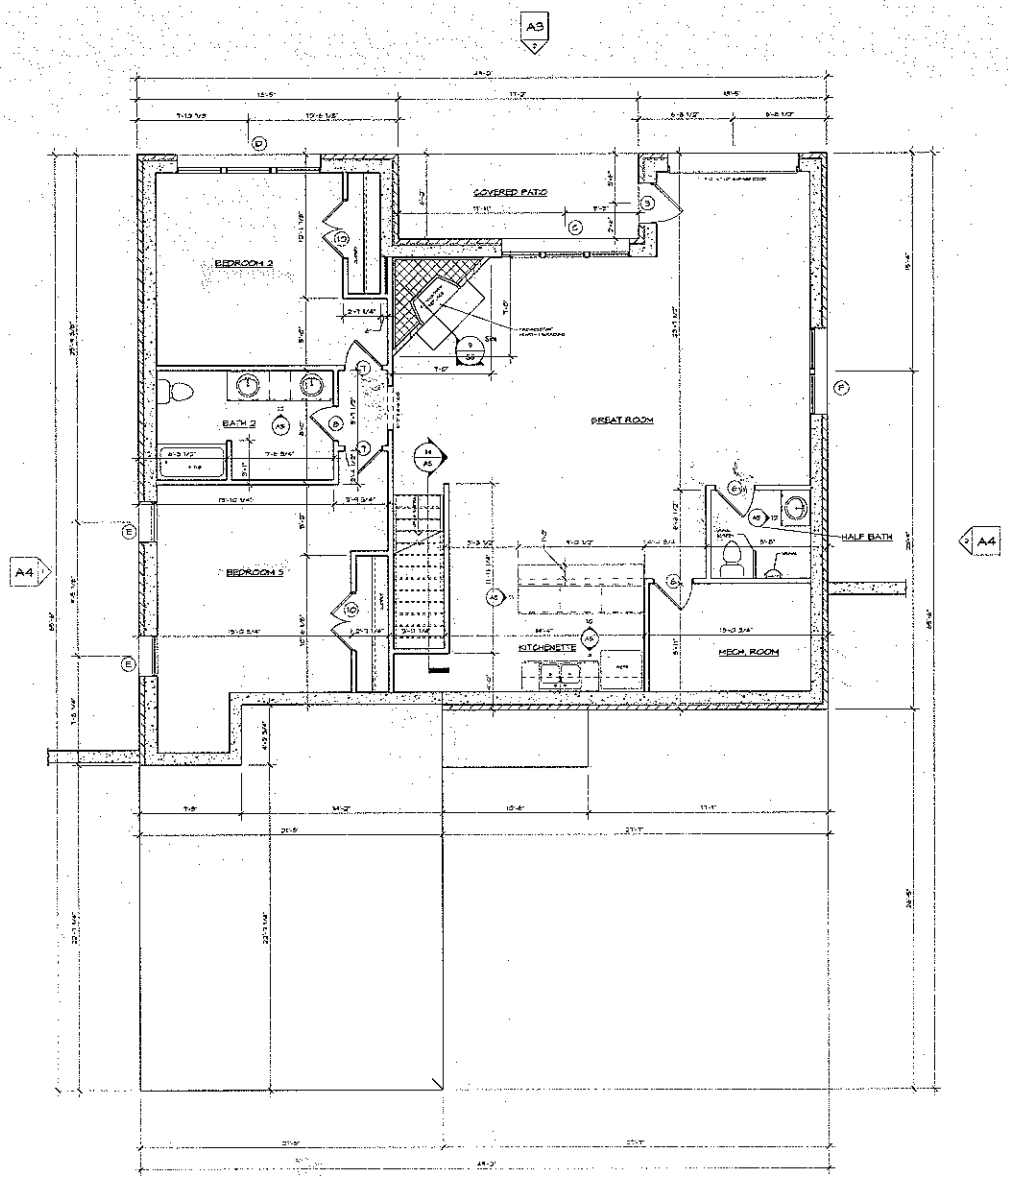

1 BASEMENT FLOOR PLAN
1/4" = 1'-0"

DOOR SCHEDULE				
TYPE	DOOR SIZE WIDTH	HEIGHT	THK.	DESCRIPTION
1	3'-0"	6'-8"	1 3/4" W/ 12" SIDELIGHTS, SEE FRONT ELEVATION	
2	2'-8"	6'-8"	1 3/4"	20 MINUTE RATED
3	2'-8"	6'-8"	1 3/4"	FIFTEEN LIGHT
4	3'-0"	6'-8"	1 3/8"	4 PANEL
5	8'-0"	6'-8"	1 3/8"	SLIDING BARN DOOR
6	2'-8"	6'-8"	1 3/8"	4 PANEL
7	2'-6"	6'-8"	1 3/8"	4 PANEL
8	2'-4"	6'-8"	1 3/8"	4 PANEL
9	2'-0"	6'-8"	1 3/8"	4 PANEL
10	(2) 2'-0"	6'-8"	1 3/8"	4 PANEL, BI-HINGE
11	(2) 1'-6"	6'-8"	1 3/8"	2 PANEL, BI-HINGE

WINDOW SCHEDULE			
TYPE	WINDOW SIZE WIDTH	HEIGHT	DESCRIPTION
A	(3) 5'-0"	6'-2"	DOUBLE-HUNG
B	2'-8"	6'-2"	DOUBLE-HUNG
C	(3) 2'-8"	6'-2"	DOUBLE-HUNG
D	(3) 3'-0"	5'-2"	DOUBLE-HUNG
E	2'-8"	5'-2"	DOUBLE-HUNG
F	(2) 2'-8"	5'-2"	DOUBLE-HUNG
G	(2) 2'-8"	3'-10"	DOUBLE-HUNG
H	2'-8"	3'-10"	DOUBLE-HUNG
I	(2) 2'-8"	3'-2"	DOUBLE-HUNG

Acknowledgement Of Plans Submittal ONLY!
APPROVED FEB 23 2015
Date
Kathleen Saunders Date 2-11-15

GENERAL NOTES
1. CONTRACTOR TO VERIFY ALL DIMENSIONS.
2. DO NOT SCALE DIMENSIONS FROM PRINTS. PLANS AND DETAILS ARE NOT ALWAYS DRAWN TO SCALE. USE DIMENSIONS GIVEN OR CONSULT DESIGNER FOR FURTHER CLARIFICATION.
3. ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE 2012 NORTH CAROLINA RESIDENTIAL CODE AND LOCAL BUILDING CODES.
4. GRADE ELEVATIONS MAY VARY DUE TO TYPE OF FOUNDATION AND OTHER ON SITE CONSIDERATIONS.
5. FLOOR TO TOP PLATE BASEMENT = 8'-1 1/2"
6. FLOOR TO FINISH HEAD BASEMENT = 9'-0"

DIMENSIONS NOTES
1. ALL EXTERIOR DIMENSIONS ARE TO BRICK OR EXTERIOR SHEATHING
2. ALL INTERIOR DIMENSIONS ARE TO ROUGH FRAMING

Custom Residence For:
The Robinson Family

Tino Home Design, LLC
Residential Design and Drafting Services

A1