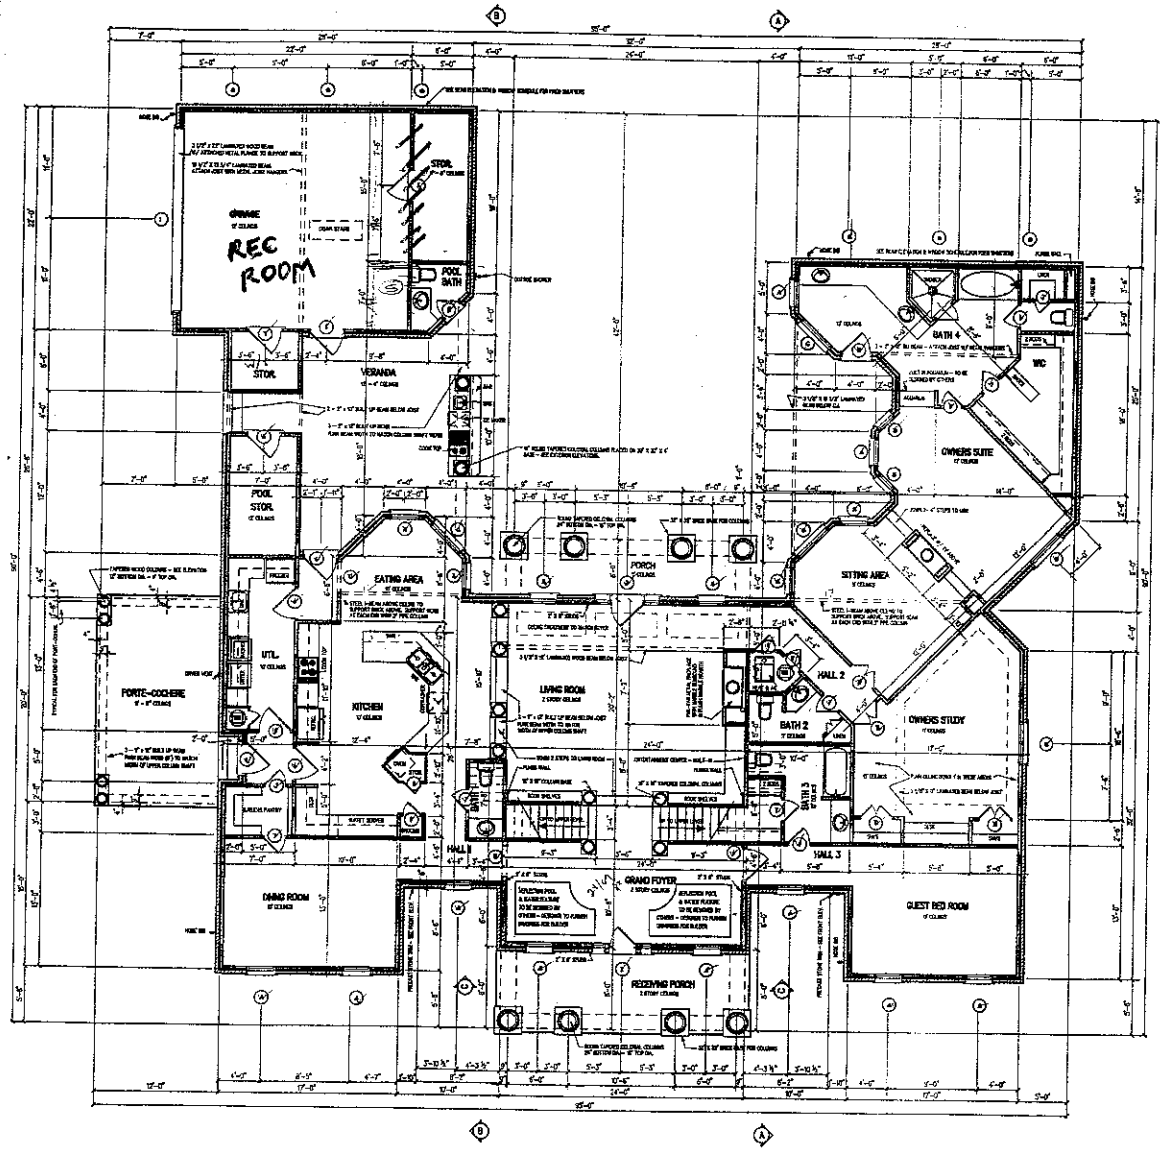


WINDOW SCHEDULE

NOTE: OWNER OR BUILDER TO INSERT BELOW OPTIONAL SIZE AND BRAND NAME OF WINDOW TO BE USED – SEE WINDOW ALLOWANCE SCHEDULE IN SPECIFICATIONS

MARK	WINDOW SIZE	DESCRIPTION	ROUGH OPENING	BRAND
A	2'-8"x6'-0"	WOOD DOUBLE HUNG		
B	2'-0"x6'-0"	WOOD DOUBLE HUNG		
C	PAIR 2'-8"x6'-0"	WOOD DOUBLE HUNG		
D	6'-0"x6'-0" / 6'-0"x2'-0"	WOOD DOUBLE HUNG WITH HALF ROUND TRANSOM ABOVE		
E	2'-0"x5'-0"	WOOD OVAL FIXED UNIT – SEE ELEVATION		
F	4'-0"x2'-0"	HALF ROUND WINDOW – LOCATED IN FRONT & REAR GABLE ROOFS		
G	2'-8"x6'-0"	FIXED WOOD SHUTTERS – SEE REAR ELEVATION		

NOTE: BECAUSE WINDOWS VARY GREATLY IN PRICE, THE WINDOW SCHEDULE ABOVE LIST SIZE AND DESCRIPTION ONLY. OWNER TO SELECT BRAND OF WINDOW ACCORDING TO ALLOWANCE (SEE SPECIFICATIONS) AND INSERT MANUFACTURER, BRAND, NUMBER AND ROUGH OPENING SIZE

DOOR SCHEDULE

MARK	SIZE	DESCRIPTION	
1	16'-0"x7'-0"	EXTERIOR OVERHEAD GARAGE DOOR – SEE ELEVATION	1
2	3'-0"x6'-8" / 1'-6"x 6'-8"	EXTERIOR ENTRY DOOR WITH SIDE LITES & 1'-8" HIGH TRANSOM ABOVE	2
3	3'-0"x6'-8" / 1'-6"x 6'-8"	EXTERIOR ENTRY DOOR WITH SIDE LITES	2
4	2'-0"x6'-8"	EXTERIOR 15-LITE FRENCH DOOR	2
5	2'-0"x6'-8"	EXTERIOR 6 RAISED PANEL	4
6	2'-0"x6'-8"	INTERIOR 6 RAISED PANEL	6
7	2'-0"x6'-8"	INTERIOR 6 RAISED PANEL	15
8	2'-0"x6'-8"	INTERIOR FULL LOUVER	2
9	1'-6"x6'-8"	INTERIOR 3 RAISED PANEL	2
10	PAIR 1'-6"x6'-8"	INTERIOR 3 RAISED PANEL	4
11	2'-0"x6'-8" w/ 11"	INTERIOR 6 RAISED PANEL BI-FOLDING	2
12	2'-0"x6'-8"	INTERIOR CASED OPENING	2
13	2'-0"x6'-8"	EXTERIOR 8 RAISED PANEL	1
14	2'-6"x6'-8"	EXTERIOR 15 LITE FRENCH DOOR	1

ALL EXTERIOR DOORS TO BE METAL INSULATED UNLESS NOTED.
ALL GLASS IN EXTERIOR DOORS TO BE INSULATED GLASS.
ALL EXTERIOR DOORS ARE 1 3/4" THICK UNLESS NOTED
ALL INTERIOR DOORS ARE 1 3/8" THICK UNLESS NOTED

AREA SCHEDULE

LIVING AREA – MAIN LEVEL	3439
LIVING AREA – UPPER LEVEL	803
TOTAL LIVING AREA	4242
UNHEATED AREA	1794
TOTAL AREA UNDER ROOF	6036


NOTE: AREAS ABOVE DO NOT INCLUDE BRICK

GENERAL NOTES

1. ALL DIMENSIONS ARE TO OUTSIDE OF STUDS OF EXTERIOR WALLS.
2. CONTRACTOR TO VERIFY ALL DATA AND CONDITIONS
3. SEE FOUNDATION DETAILS FOR STUD SIZE AND SPACING
4. INSTALL ATTIC COOLING FANS AS REQUIRED ON ROOF FOR ATTIC VENTILATION
5. CAULK AROUND ALL EXTERIOR DOOR AND WINDOW FRAMES PRIOR TO INSTALLING INTERIOR FINISH
6. VERIFY ALL BEAM SIZES AND STRUCTURAL MEMBERS AND ADJUST IF NECESSARY FOR LOCAL CONDITIONS AND CODE REQUIREMENTS
7. ALL WOOD IN CONTACT WITH CONCRETE TO BE PRESSURE TREATED
8. THESE PLANS WERE DESIGNED IN ACCORDANCE WITH GENERAL CONSTRUCTION PRACTICES OF THE AREA IN WHICH THEY WERE DESIGNED AND TO THE 1999 CABO CODES. DUE TO VARYING CONDITIONS AND TRADE PRACTICE, IT MAY BE NECESSARY TO MODIFY OR ADJUST THE PLAN TO MEET LOCAL CONDITIONS. CONSULT YOUR LOCAL PERMIT DEPARTMENT. IT IS THE RESPONSIBILITY OF THE PLAN PURCHASER OR CONTRACTOR TO VERIFY ALL DATA OF THE PLANS AND TO ADJUST PLAN AS NECESSARY TO MEET ALL FEDERAL, STATE AND LOCAL CODES.
9. THE CONTRACTOR SHALL NOTIFY THE DESIGNER OF ANY DISCREPANCIES OR PROBLEMS OBSERVED OR PERCEIVED PRIOR TO STARTING CONSTRUCTION.

LOWER LEVEL FLOOR PLAN

SCALE: 1/8" = 1'-0"



TYPICAL DOOR TREATMENT


IF THIS STAMP IS NOT RED IT IS AN ILLEGAL SET OF PLANS

BRELAND & FARMER DESIGNERS, INC.
POST OFFICE BOX 13083 / JACKSON, MS 39236-3083 / PHONE (601) 932-2222
© COPYRIGHT 1997 BY BRELAND & FARMER DESIGNERS, INC.
DIMENSIONS AND CONDITIONS TO BE VERIFIED BY CONTRACTOR

2000

4200

533

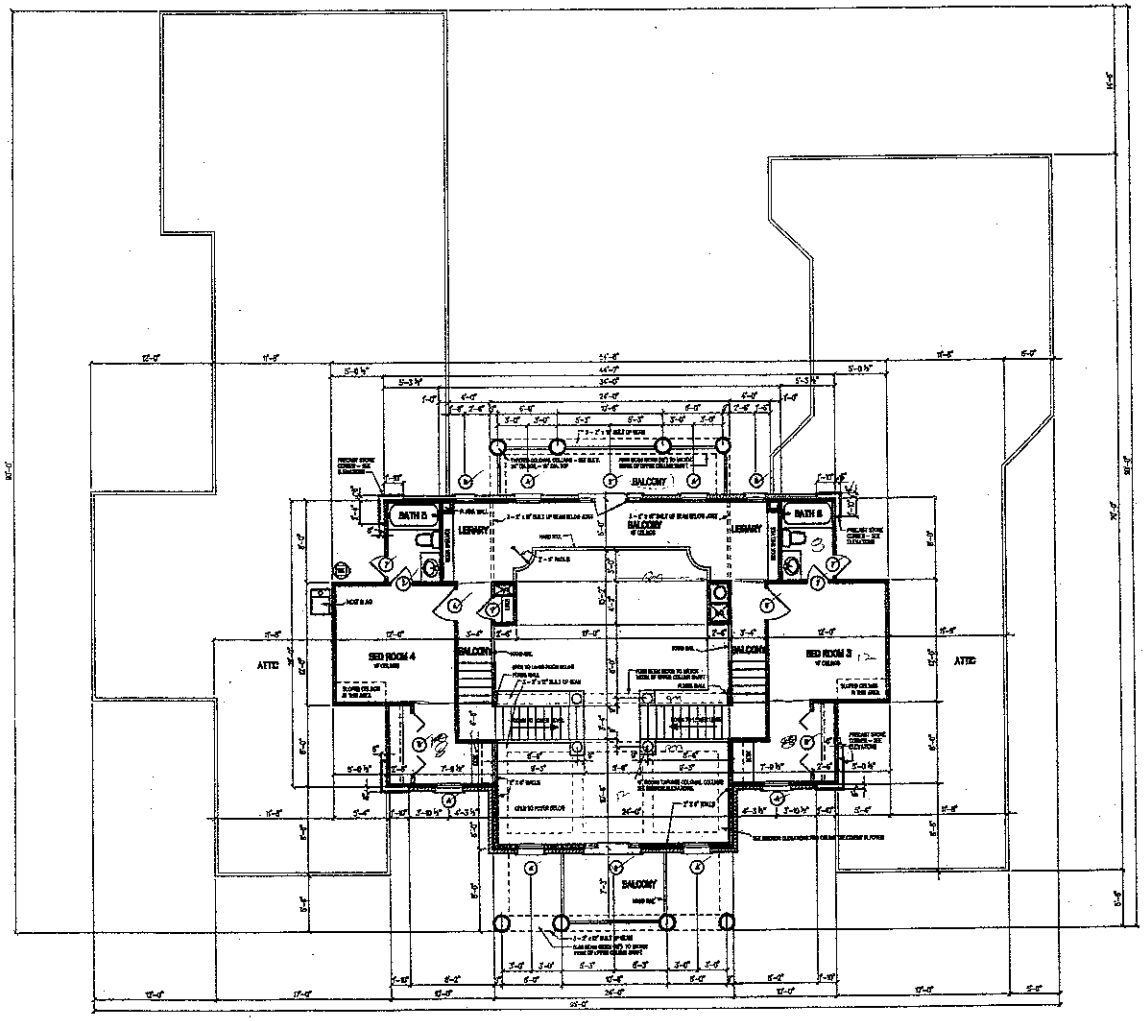

UPPER LEVEL FLOOR PLAN

BRELAND & FARMER DESIGNERS, INC.
POST OFFICE BOX 13053 / JACKSON, MS 39236-3053 / PHONE (601) 936-3232
DIMENSIONS AND CONDITIONS TO BE VERIFIED BY CONTRACTOR © COPYRIGHT 1997 BY BRELAND & FARMER DESIGNERS, INC.

IF THIS STAMP IS NOT RED IT IS AN ILLEGAL SET OF PLANS

4200