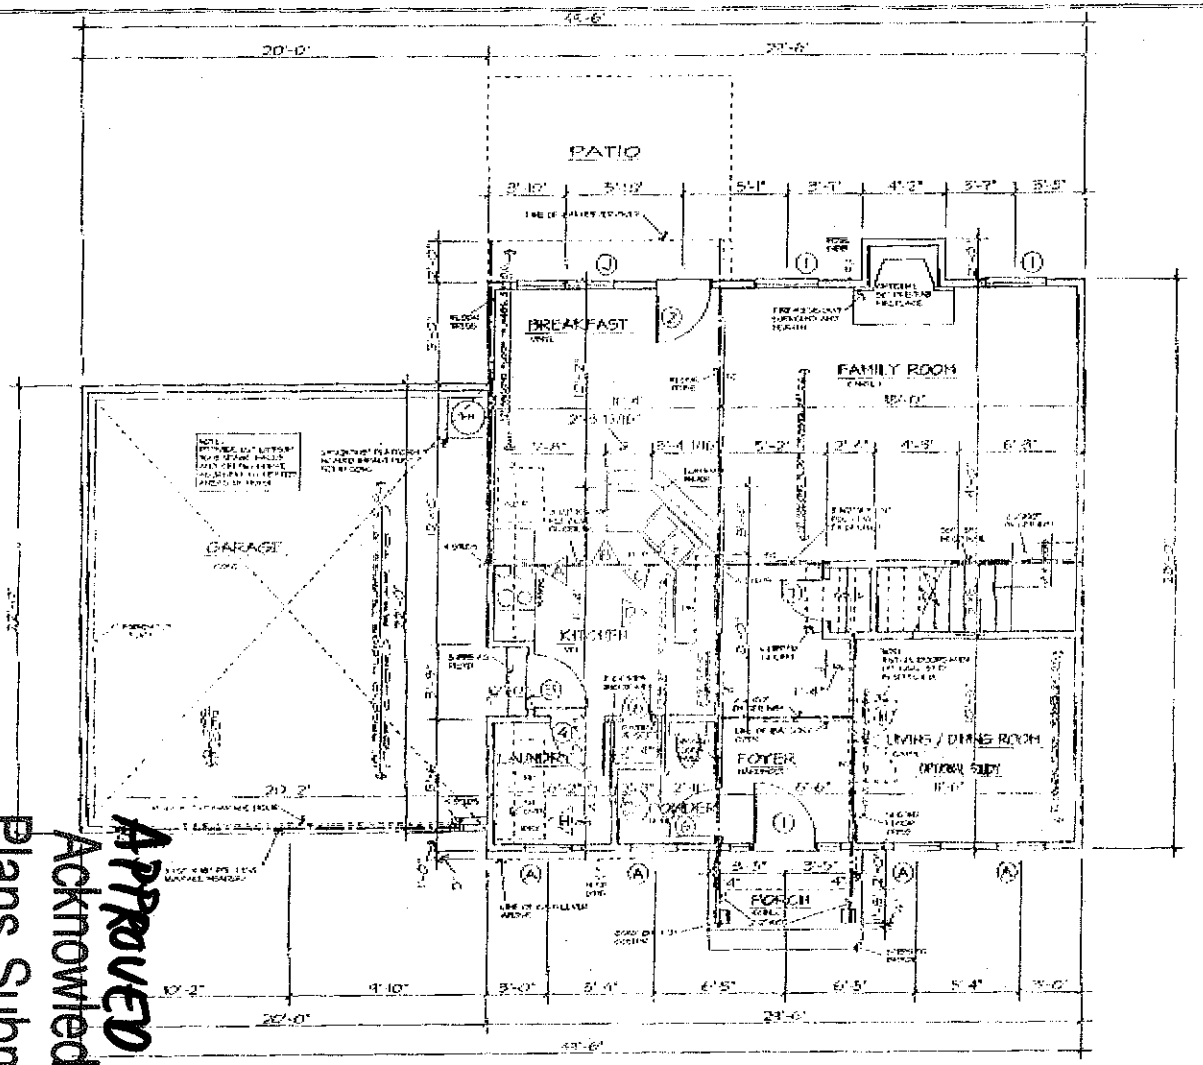


1ST FLOOR PLAN

SCALE: 1/4" = 1'-0"

DOOR SCHEDULE		
NO.	SIZE	DESCRIPTION
①	3'-0" X 6'-8" X 1 3/4" WITH 12" SIDELIGHTS, WITH 12" TRANSOM	SEE FRONT ELEVATION
②	2'-8" X 6'-8" X 1 3/4"	FIFTEEN LIGHT
③	2'-8" X 6'-8" X 1 3/4"	20 MINUTE RATED
④	2'-8" X 6'-8" X 1 3/8"	6 PANEL COLONIAL
⑤	2'-6" X 6'-8" X 1 3/8"	6 PANEL COLONIAL
⑥	2'-4" X 6'-8" X 1 3/8"	6 PANEL COLONIAL
⑦	2'-0" X 6'-8" X 1 3/8"	6 PANEL COLONIAL
⑧	1'-6" X 6'-8" X 1 3/8"	6 PANEL COLONIAL
⑨	2'-0" X 6'-8" X 1 3/8"	6 PANEL COLONIAL
⑩	2'-8" X 6'-8" X 1 3/8"	6 PANEL COLONIAL
⑪	2'-0" X 6'-8" X 1 3/8"	"FRENCH", TEN LIGHT

WINDOW SCHEDULE		
TYPE	SIZE	DESCRIPTION
Ⓐ	2'-0" X 6'-0"	VINYL S/H, 12 LITE
Ⓑ	2'-4" X 5'-0"	VINYL S/H, 12 LITE
Ⓒ	2'-8" X 5'-0"	VINYL S/H, 12 LITE
Ⓓ	4'-0" X 4'-0"	VINYL PIVOT WINDOW
Ⓔ	3'-0" X 5'-0"	VINYL S/H, 12 LITE
Ⓕ	5'-0" X 1'-0"	VINYL, FIXED
Ⓖ	2'-4" X 5'-0" 10'-2" RAKE, W/ PEAK	VINYL S/H, 12 LITE
Ⓗ	2'-2"+1" X 5'-2"	VINYL S/H, 12 LITE
Ⓘ	3'-0" X 5'-0"	VINYL S/H, 15 LITE
Ⓙ	2'-2"+4" X 6'-0"	VINYL S/H, 18 LITE

AREA:

1ST. FLOOR HEATED	819
2ND. FLOOR HEATED	890
BONUS ROOM	288
TOTAL HEATED AREA	1997
GARAGE AND STORAGE	447
TOTAL AREA	2444
OPTIONAL COMPUTER NOOK	53

BEARING WALLS SYMBOL = ═══

HEADER NOTES - FIRST FLOOR:

1. ALL EXTERIOR HEADERS ON FIRST FLOOR SHALL BE 2-2" X 10" NO. 2 SOUTHERN YELLOW PINE OR BETTER UNLESS OTHERWISE NOTED.
2. ALL INTERIOR LOAD-BEARING HEADERS ON FIRST FLOOR SHALL BE 2-2" X 10" NO. 2 SOUTHERN YELLOW PINE OR BETTER UNLESS OTHERWISE NOTED.
3. ALL INTERIOR NON LOAD-BEARING HEADERS ON FIRST FLOOR SHALL BE 2-2" X 4" NO. 2 SOUTHERN YELLOW PINE OR BETTER UNLESS OTHERWISE NOTED.

BRICK LINTEL NOTES:


1. [illegible] TO VERIFY ALL DIMENSIONS.
2. [illegible] DIMENSIONS FROM PRINTS, PLANS AND DETAILS. [illegible] TO SCALE. USE DIMENSIONS GIVEN OR [illegible] FOR FURTHER CLARIFICATION.
3. [illegible] BEAM SPANS DETERMINED FOR THE USE OF #2 SOUTHERN YELLOW PINE. ANY OTHER SPECIES MUST BE VERIFIED.
4. FLOOR TRUSS IN SECOND FLOOR MODEL ALL PARALLEL PARAPET 0"-6".
5. FLOOR TO TOP PLATE FIRST FLOOR = 9'-1 1/2".
6. FLOOR TO HEADER HEAD FIRST FLOOR = 7'-0".
7. FLOOR TRUSS SPANS DETERMINED BY DESIGN LOADS OF [illegible] LIVE 10 psf. DEAD LOADS.

APPROVED
Acknowledgement Of
Plans Submittal ONLY!
Builder [illegible] Date 05-12-03
Engineer [illegible] Date 5/14/03

WILLIAM BREWSTER CO.
THE ASPEN - B (2 CAR W/ BONUS)

DOUGLAS E. TINO, INC.
RESIDENTIAL DESIGN AND DRAFTING SERVICES
[illegible] BAY ROPER DRIVE
CHARLOTTE, NORTH CAROLINA 28269
PHONE: (704) [illegible] FAX: (704) [illegible]

DATE 2/26/03
DRAWN CAD
SHEET 2

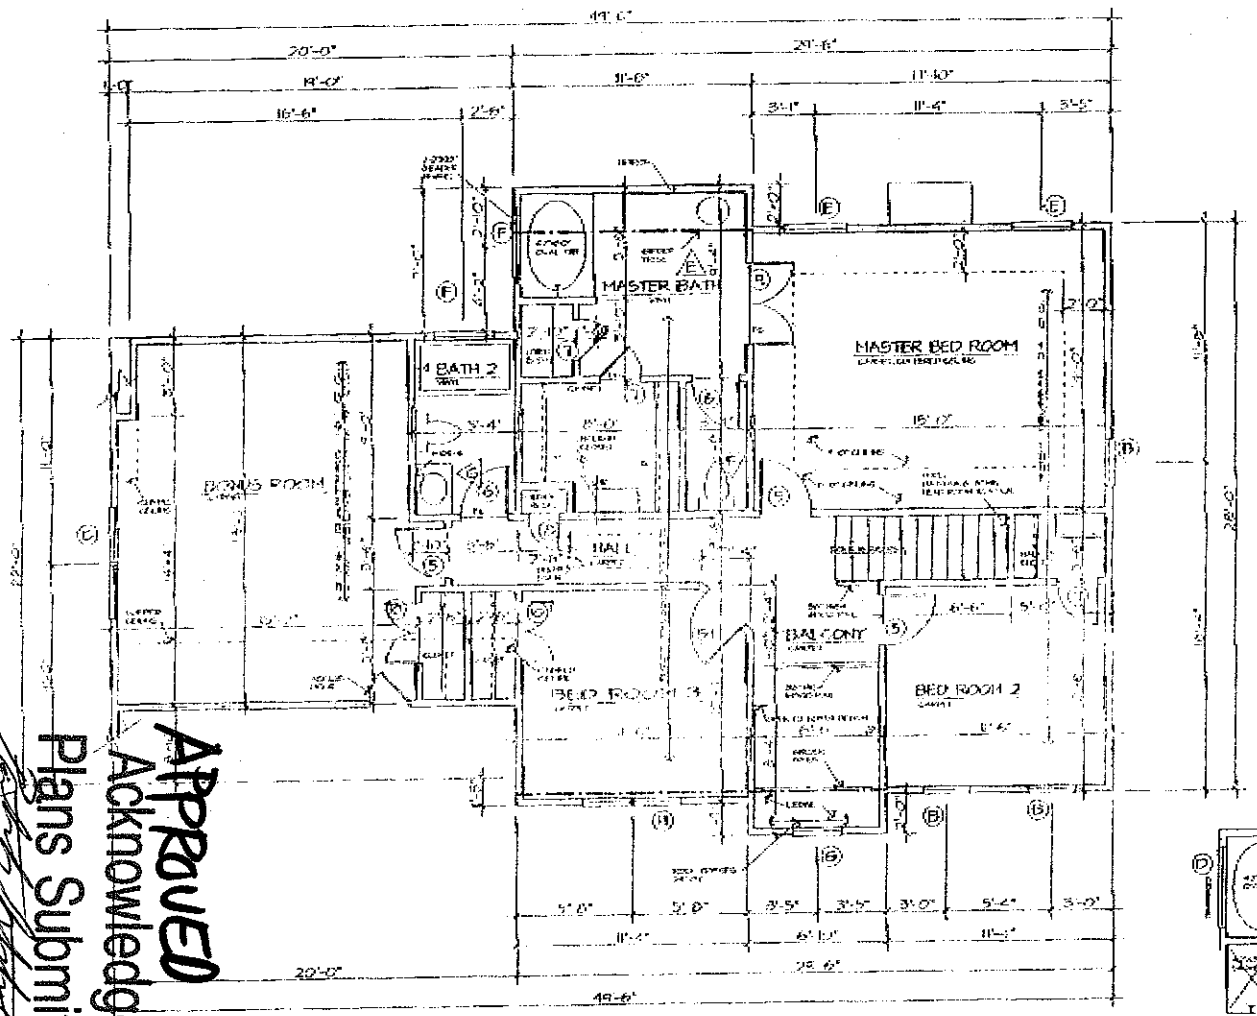


SECOND FLOOR PLAN


SCALE: 1/4" = 1'-0"

DOOR SCHEDULE		
NO.	SIZE	DESCRIPTION
①	3'-0" X 6'-8" X 1 3/4" WITH 12" SIDELIGHTS, WITH 12" TRANSOM	SEE FRONT ELEVATI
②	2'-8" X 6'-8" X 1 3/4"	FIFTEEN LIGHT
③	2'-8" X 6'-8" X 1 3/4"	20 MINUTE RATE
④	2'-8" X 6'-8" X 1 3/8"	6 PANEL COLONIA
⑤	2'-6" X 6'-8" X 1 3/8"	6 PANEL COLONIA
⑥	2'-4" X 6'-8" X 1 3/8"	6 PANEL COLONIA
⑦	2'-0" X 6'-8" X 1 3/8"	6 PANEL COLONIA
⑧	1'-6" X 6'-8" X 1 3/8"	6 PANEL COLONIA
⑨	2'-0" X 6'-8" X 1 3/8"	6 PANEL COLONIA
⑩	2'-6" X 6'-8" X 1 3/8"	6 PANEL COLONIA
⑪	2'-6" X 6'-8" X 1 3/8"	"TIPPECAN" TEN LIGH

WINDOW SCHEDULE		
TYPE	SIZE	DESCRIPTION
(A)	[illegible]	VINYL SH, 10 LT
(B)	[illegible]	VINYL SH, 12 LT
(C)	[illegible]	VINYL SH, 12 LT
(D)	[illegible]	GLASS FIXED, TEMPER
(E)	[illegible]	VINYL SH, 12 LT
(F)	[illegible]	VINYL, FIXED
(G)	[illegible]	VINYL SH, 12 LT
(H)	[illegible]	VINYL SH, 12 LT
(I)	[illegible]	VINYL SH, 18 LT
(J)	[illegible]	VINYL SH, 18 LT



OPTIONAL DELUXE MASTER BATH



OPTIONAL COMPUTER NOOK

APPROVED WITH
Acknowledgement Of
Plans Submittal ONLY!
Date 5-12-03
Date 5-14-03

BEARING WALLS SYMBOL = ═══

HEADER NOTES - SECOND FLOOR:

BRICK LINTEL NOTES:

WILLIAM BREWSTER CO.		
THE ASPEN - B (2 CAR W/ BONUS)		
DOUGLAS E. TINO, INC. RESIDENTIAL DESIGN AND DRAFTING SERVICES	REVISIONS 1-29-03	SHEET 3
	DRAWN CAD	