66

40'

NOT FOR CONSTRUCTION

DOOR SCHEDULE


Created at 3:06 PM 6/1/2007

MARK	SIZE	ROUGH OPENING	TYP	QTY	REMARKS	PROVIDED BY
1	3'0 x 6'8	3'2 1/2" x 6'10 1/2"	EXT	1	Fib Insulate 2-Panel Adj to Drywall	Southland
2	3'0 x 6'8	3'2 1/2" x 6'10 1/2"	EXT	1	Fiberglass 2-Panel 9 Lite Door-S	Southland

WINDOW SCHEDULE

Created at 3:06 PM 6/1/2007

MARK	SIZE	ROUGH OPENING	TYP	QTY	REMARKS	PROVIDED BY
A	3'0 x 5'0	3'2 x 5'2 3/4"	DH	1	Wood Single	Southland
C	2'0 x 4'0	2'1 3/8 x 4'0 3/4	EXT	1	Wood Twin	Southland
D	3'0 x 3'0	3'2 x 3'2 3/4	DH	1	Wood Single	Southland
E	3'0 x 2'0	3'2 x 2'2 3/4	DH	1	Wood Double Transom	Southland

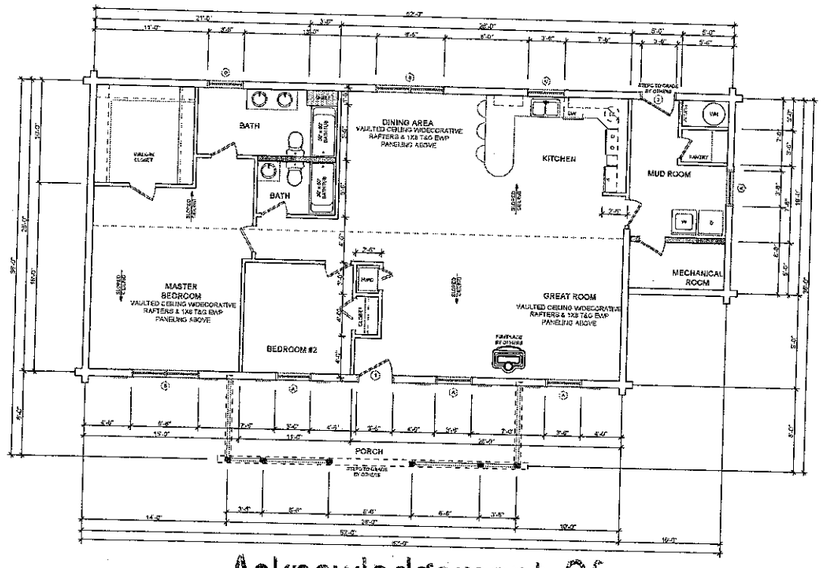

FLOOR PLAN

ARCHICAD VERSION 8.1
6/4/2007 10:04 AM

EQUATE FOOTAGE (GROSS PRESENTATION)

HEATED AREAS:	
FIRST FLOOR	1734 Sq.Ft.
TOTAL HEATED	1734 Sq.Ft.
UNHEATED AREAS:	
PORCH (S)	410 Sq.Ft.
TOTAL UNHEATED	410 Sq.Ft.
TOTAL UNDER ROOF	2144 Sq.Ft.

6X6 STOCKADE/BYP
PORCH POSTS AND RAILING PACKAGE

EXTRA ITEMS PURCHASED WITH YOUR LOG HOME PACKAGE

EXTRA WIDTH (per ft)	4 ft

FLOOR PLAN KEY:

- INTERIOR WALL
- INTERIOR LOAD-BEARING WALL
- PLUMBING WALL
- STOCKADE / DOVETAIL LOG WALL (REFER TO CONTRACT)
- HANDRAILS & PICKETS (BY OTHERS)
- 6X6 LOG POSTS (REFER TO CONTRACT)
- 6X6 LOG RAILS (REFER TO CONTRACT)
- TOILET (BY OTHERS)
- SINK (BY OTHERS)

GENERAL FLOOR PLAN NOTES:

1.) UNLESS NOTED OTHERWISE, ALL INTERIOR STUD WALLS ARE NON-LOAD BEARING WALLS WITH 2X4 STUDS @ 16" O.C. BEAMS BASED ON #2 DF-L FLOOR JOISTS @ 40 PSF, LL + 10 PSF DL EXTERIOR AREAS 40 PSF, LL + 10 PSF DL LIVING AREAS PER 2006 IRC LOAD TABLE R, TWO FAMILY CODE.

2.) FLOOR LOADS ARE BASED ON A LIVE LOAD OF: 30 PSF, LL + 10 PSF DL EXTERIOR AREAS 40 PSF, LL + 10 PSF DL LIVING AREAS PER 2006 IRC LOAD TABLE R, TWO FAMILY CODE.

3.) UNLESS OTHERWISE NOTED, ROOF LOADS ARE DESIGNED FOR 15 PSF SNOW LOAD. ALL OTHER ROOF LOADS TO BE DETERMINED BY LOCAL BUILDING CODES.

IMPORTANT NOTES READ CAREFULLY APPROVAL PLANS

©1997 SOUTHLAND LOG HOMES, INC. These blueprints are copyrighted architectural works and the drawings or blueprints are retained by SOUTHLAND LOG HOMES, INC. The blueprints are to be used for the construction of one (1) SOUTHLAND LOG HOME and may not be copied or altered. All rights are reserved.

NOTE: THESE ARE APPROVAL DRAWINGS ONLY. THEY ARE FOR DESIGN, ESTIMATING AND APPRAISAL PURPOSES ONLY. THESE APPROVAL DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES.

WARNING:

DO NOT use these plans to begin construction. These plans are intended for customer review and comment and may be used for estimating purposes only. SLH is not responsible for any construction begun prior to the customer receiving Final Plans.

LOG STYLE & PROFILE PER SIGNED CONTRACT

YP
R/R

All change requests of any type must be made in writing.

Plans / Materials Change Request Form

To:
Southland Log Homes, Inc.
P.O. Box 1662
Attn: 662-2332-5462
Phone: 800-545-5535
FAX: 800-595-3124

Attn: Design Department

Contract/Delivery Date
Month | Day | Year

Buyer(s):

Address: City: Prov.: Zip:

Home Phone: Work Phone: E-Mail:

Office/Dealer:

I request that you make the following changes to my materials or blueprints:

No changes can be made to the materials and/or
(A) Purchaser's requested main changes in writing on Section "Materials/Options Change Request Form"
(B) to the contents to main changes and allowance in Purchaser's section materials and/or
(C) Purchaser's consent is received by Seller before twenty-eight (28) days prior to the delivery date.
to symbol a Change Order Fee.
Any changes are requested by by Seller, seller reserves the right to request additional down payment. Purchaser may also be required to execute an amendment to the change order ($10 per Change), and a nonrefundable deposit for 40% rate of $120 per hour for the revision of the final plans or drawn. Purchaser acknowledges that no changes may be made within twenty-eight (28) days before the delivery date, or the final plans are complete & whichever occurs first.

1. _____
2. _____
3. _____
4. _____
5. _____

Your request will be confirmed or denied by a written change order. If you do not receive a written change order within seven (7) days, please call at 1-800-545-5535 Monday - Friday, 8:00 AM to 5:00 PM

Sign Here

Client _____ Date _____
Purchaser

Delivery date change requests are expensive, seldom granted and must be made in writing to Southland Log Homes Contract Department.

SOUTHLAND LOG HOMES

A SOUTHLAND LOG HOME FOR:
MR. PHIL BLACK
IREDELL NC

DRAWING TITLE:
FIRST FLOOR PLAN

DELIVERY DATE:	JULY 12, 2007
MODEL:	CUSTOM
LOG STYLE:	6X8 BYP
LOG PROFILE:	R/R
SCALE:	AS NOTED
DESIGNED BY:	DEB
CHECKED BY:	JAL
PLAN DATE:	JUNE 1, 2007
CUSTOMER'S ADDRESS	SHEET NO. 2.1

CUSTOMER ID NUMBER & PROGRAM/TASK/LOT NUMBER
0705280

Acknowledgement Of
Plans Submittal ONLY!

_____ Date 9-24-08

D. McCoy Date 9-24-08