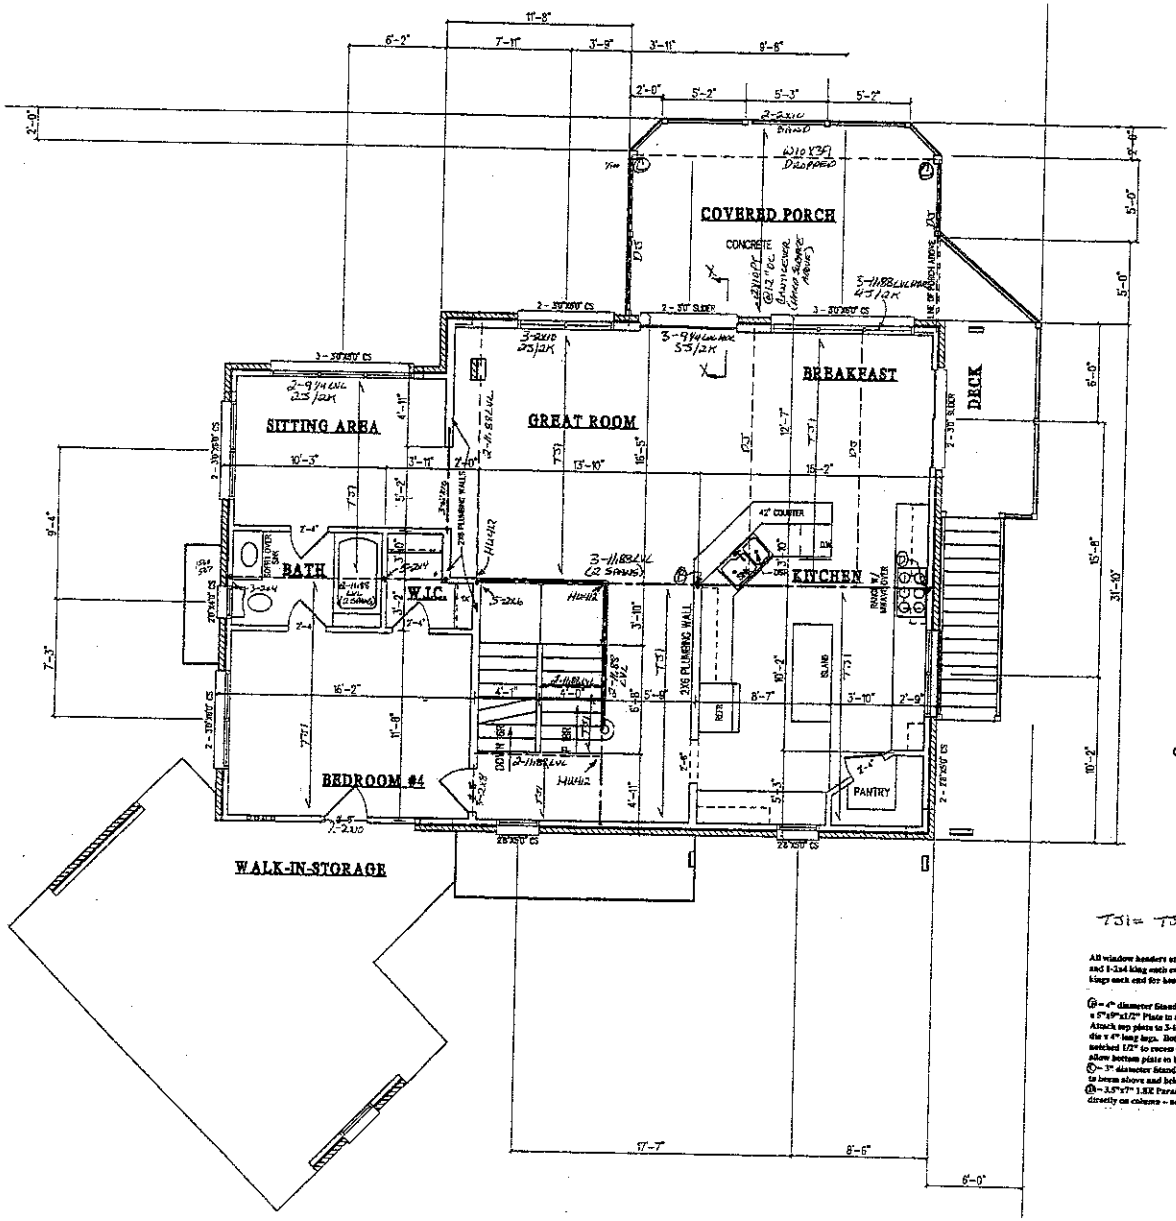


Acknowledgement Of Plans Submittal ONLY!

Date 6/5/09

Date 6/5/09

T5i= T5i-230/11.88 @16" oc.

All window headers are 2-2x10 #2 SYP w/ 1-2x4 jack and 1-2x4 king each end. Use 2-2x4 jacks and 2-2x4 kings each end for headers 6' wide and greater.

(B)= 4" diameter Standard Weight Steel Column. Weld a 5"x9"x1/2" Plate to top and bottom of column. Attach top plate to 3-1.55E LVL beam with four 1/2" dia x 4" long lags. Bottom of 3-11.85E LVL may be notched 1/2" to recess top plate. Cut out subfloor to allow bottom plate to bear on beam below.
(C)= 3" diameter Standard Weight Steel Column. Weld to beam above and below.
(D)= 3.5"x7" 1.8E Parallam Column. LVL beam to set directly on column -- no top plates.

SECOND FLOOR PLAN

SCALE: 1/4" = 1'0"

Robert T. Queen, P.E.
2632 Pamlico Drive
Shelby, NC 28152

11 - 25 - 08
STRUCTURE ONLY

NORTH CAROLINA PROFESSIONAL SEAL 19815 ENGINEER ROBERT T. QUEEN

FOR
TOM & DO
AFFORDABLE