

MICHAEL ATHANAS & ASSOCIATES
LICENSED SOIL SCIENTIST
561 Ennis Rd.
Weddington, NC 28173
(704) 576-3887

Reference: Data Sheet for 835 Brawley School Rd
Building Footprint: See attached plan
Building Setbacks: 30' Front, 10' Rear, 20' Side
Water Source: Public water
Number of employees: 9 (The system currently sized for 240 GPD)
Proposed LTAR: n/a
Existing System Type: Conventional Bed
Existing Repair System Type: Conventional Bed
Distribution: Gravity
Septic Tank Size: 1000 gallons (existing)
Proposed Trench Bottom: n/a

Comments:
This site is being evaluated for a landscaping business. The current repair permit shows the original bed plus two 30' beds. MA&A found the original bed and one 60' bed. We are not sure of the current distribution pattern, it appears to be a distribution box. This system is currently sized at 240 GPD. This would allow for 9 full time employees.

book 55, page 8, that the ratio of precision is 1':10,000, that this map is prepared in accordance with the General Statutes of North Carolina Chapter 89C.


my hand and seal on the 18 day of AUG.

A.D. 20 16

WILLIAM M. ALLEN, PLS

SEAL L3499

LAND SURVEYOR WILLIAM M. ALLEN

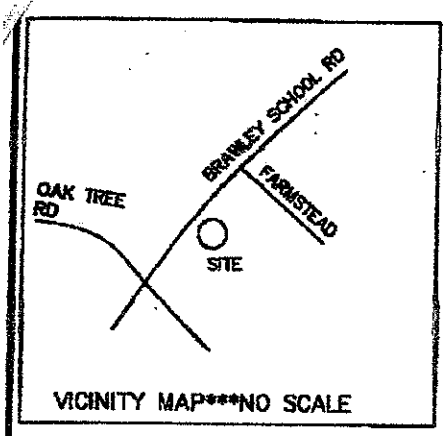


VICINITY MAP***NO SCALE

SWIM LAWN & LANDSCAPE LLC
2419\1749

LICENSED SOIL SCIENTIST
MICHAEL ATHANAS
THE GREAT SEAL OF THE STATE OF NORTH CAROLINA
1252
STATE OF NORTH CAROLINA

MP LEASING LLP
2357\1886

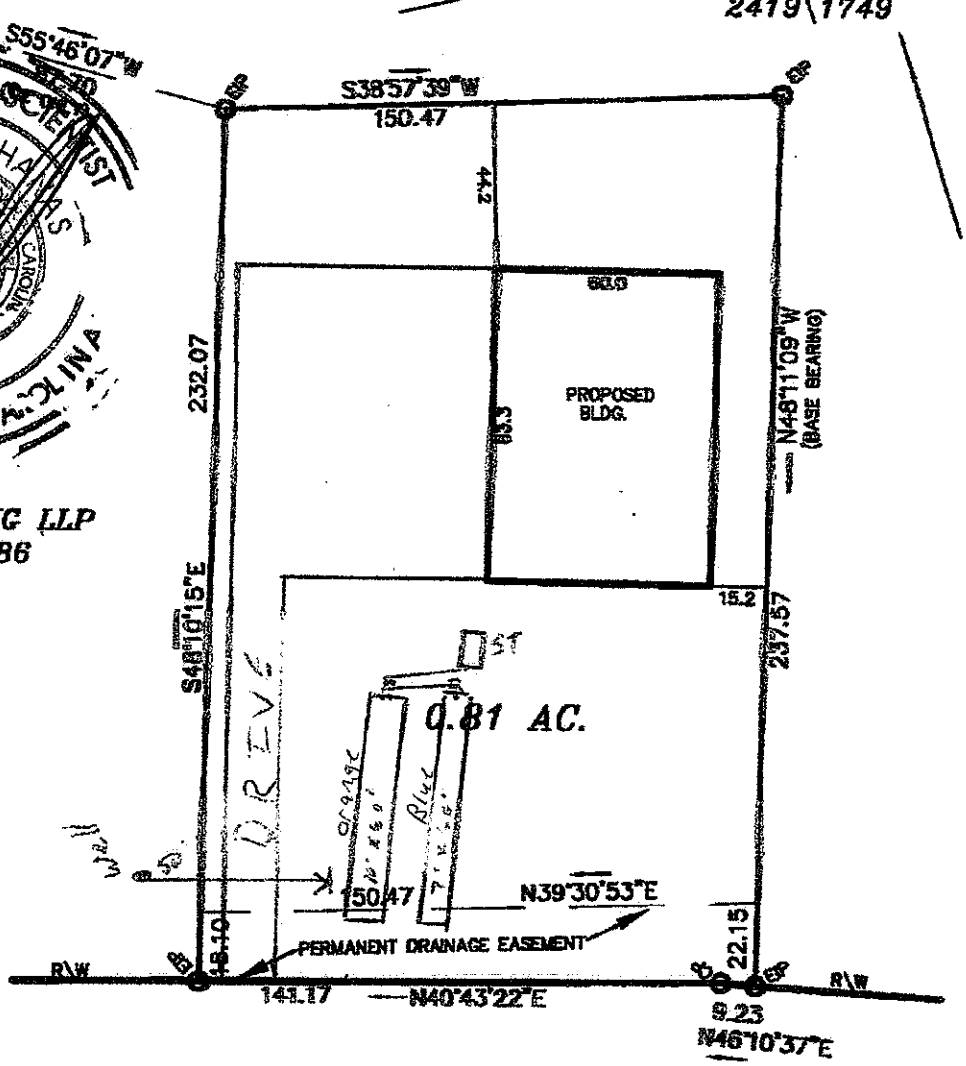

Scale 1"=50'

BRAWLEY SCHOOL RD.
(PUBLIC R\W WIDTH VARIES)

LEGEND

- P.P. = POWER POLE
- □ = POWER TRANS.
- E.I.P. = EXISTING IRON FOUND
- I.P.S. = #4 REBAR SET
- R/W = RIGHT-OF-WAY
- CP = COMPUTED POINT

NOTES

1) THIS PROPERTY MAY BE SUBJECT TO ANY EASEMENTS AND/OR RIGHTS OF WAY OF RECORD.
2) ACREAGE COMPUTED BY THE COORDINATE METHOD.
3) UNDERGROUND POWER
4) NO GRID MONUMENT FOUND WITHIN 2000 FEET.