LINE SCHEDULE


LINE NUMBER	COLOR	FIELD ELEVATION	LENGTH (FT)
1	RED	2.2	27
2	ORANGE	3.1	71
3	BLUE	3.7	110
4	PINK	4.2	130
5	BLUE	4.5	80
6	RED	4.9	130
7	ORANGE	5.1	~~130~~ 140'
8	BLUE	6.7	156
9	PINK	6.9	103
10	RED	7.5	73
11	ORANGE	8.3	42

LOT 195 BELLS CROSSING SUBDIVISION

4-BEDROOM INNOVATIVE GRAVITY SYSTEM
SERIAL DISTRIBUTION WITH DROP BOXES
LINES 4-7 TOTAL 500 LINEAR FEET
EZFLOW OR CHAMBER
LTAR 0.25
25% REDUCTION

4-BEDROOM INNOVATIVE GRAVITY SYSTEM
SERIAL DISTRIBUTION WITH DROP BOXES
LINES 1-3,8-11 TOTAL 583 LINEAR FEET
LTAR 0.25
25% REDUCTION

FOR GENERAL USE NOT A SURVEY
PRELIMINARY NOT FOR CONSTRUCTION

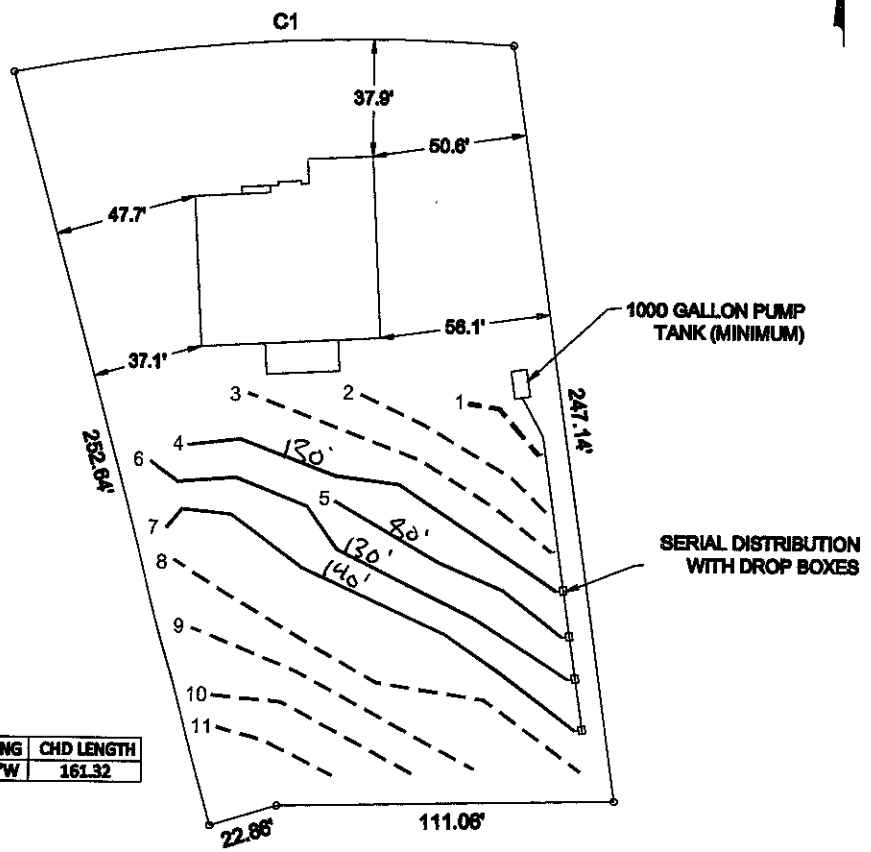

CURVE	LENGTH	RADIUS	TANGENT	CHD BEARING	CHD LENGTH
C1	161.77	625.00	83.25	S86°34'31"W	161.32

0 30 60

SCALE:
1" = 60 ft.

Bateman Civil Survey Company
Engineers • Surveyors • Planners
200 N. Main Street, Holly Springs, NC 27540 Ph: 919.577.1080 Fax: 919.577.1081
www.batemancivilsurvey.com info@batemancivilsurvey.com
NCBELS Firm No. C-2376

MeritageHomes

LOT 195
BELLS CROSSING SUBDIVISION
MOORESVILLE, NC
IREDELL COUNTY

DATE: 10/17/12 DRAWN BY: TMB CHECKED BY: TMB