IREDELL COUNTY HEALTH DEPARTMENT

STATESVILLE 704-878-5305 MOORESVILLE 704-664-5281

IMPROVEMENT PERMIT / AUTHORIZATION TO CONSTRUCT / OPERATION PERMIT / EXISTING SYSTEM INSPECTION

PERMIT# 123261 PIN# ~~4664-67-0275.000~~ 4684583035.000 DATE 4/19/05

OWNER OR CONTRACTOR RIDGELINE DEVELOPMENT/EDWARDS CONST+RNCH PHONE: Business 362-5007 Home

ADDRESS 17105 KEATON DR. SUITE 207-C CORNELIUS NC 28031

LOCATION SHEARERS RD SOUTH - TL ANNISTON - LOT ON RT - SEPTIC ON LEFT

SUBDIVISION ANNISTON BLOCK / SECTION 1 LOT 9 LOT AREA .62AC SITE CLASS PS DESIGN FLOW 480GPD L.T.A.R. .3600/1.2

Septic Tank: 1000 Gallons; STB 294 Date 3-13-07

Pump Tank: 1000 Gallons; PT 17 Date 4-21-07

Pump Make: GOULDS Model WE\S12 HH Serial No.

Nitrification Field: No Fields 1 Square Feet 1000 Linear Feet 400

No Lines 3@133' Trench Width 36" Max Trench Bottom Depth 30" Gravel Depth N/A

☑ New System ☐ Repair System Type: I, II, III, IV, V, VI

System Description: PUMP 75% REDUCTION

Repair System Description: C/ PANEL

Maintenance Agreement Required: ☐ Yes ☑ No

☑ House/Mod. Home No. Bedrooms 4

☐ Mobile Home No. Bathrooms 4

☐ Business No. Employees

☐ Other

☐ Slab ☐ Crawl Space ☑ Basement w/plumbing ☐ Basement wo/plumbing


Water Supply: ☑ Individual ☐ Public ☐ Community


Comments:/Conditions:

Comments:/Condition The location of the proposed Basement/workout room, Den addition does not appear to impact the existing septic system.
**NOTE: bath + kitchenette w/in existing footprint

Andy Melville REHS
Date: 4-29-11
ICHD-Environmental Health Division

INITIAL SITE SKETCH

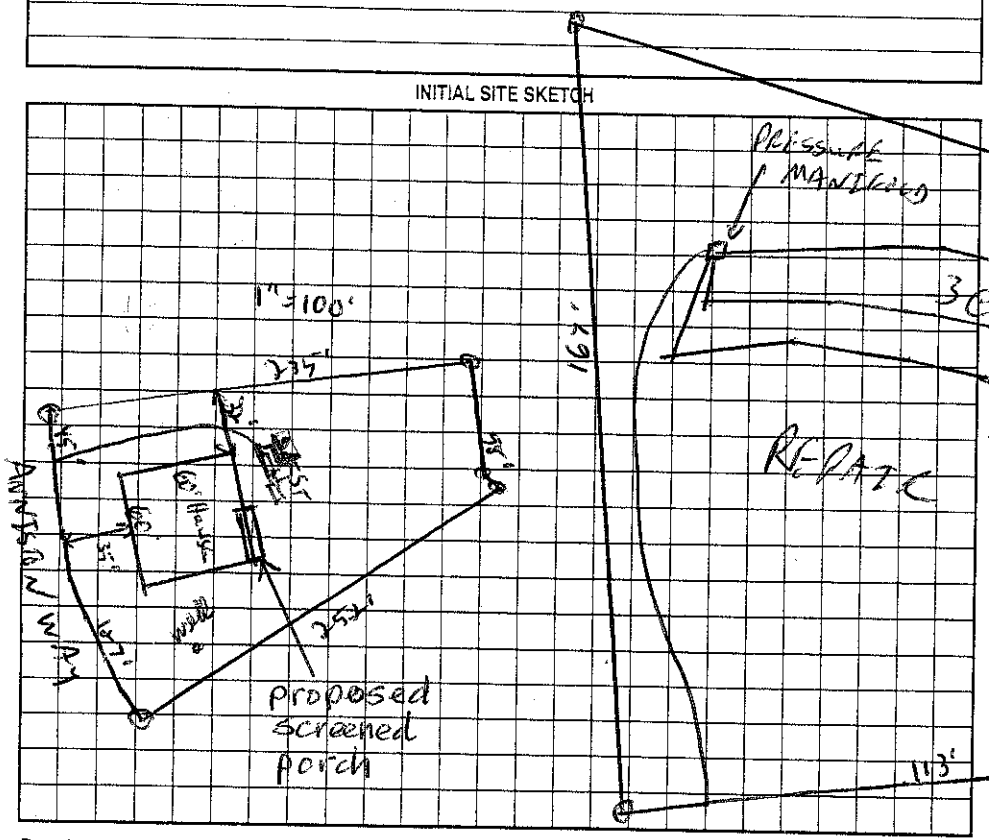

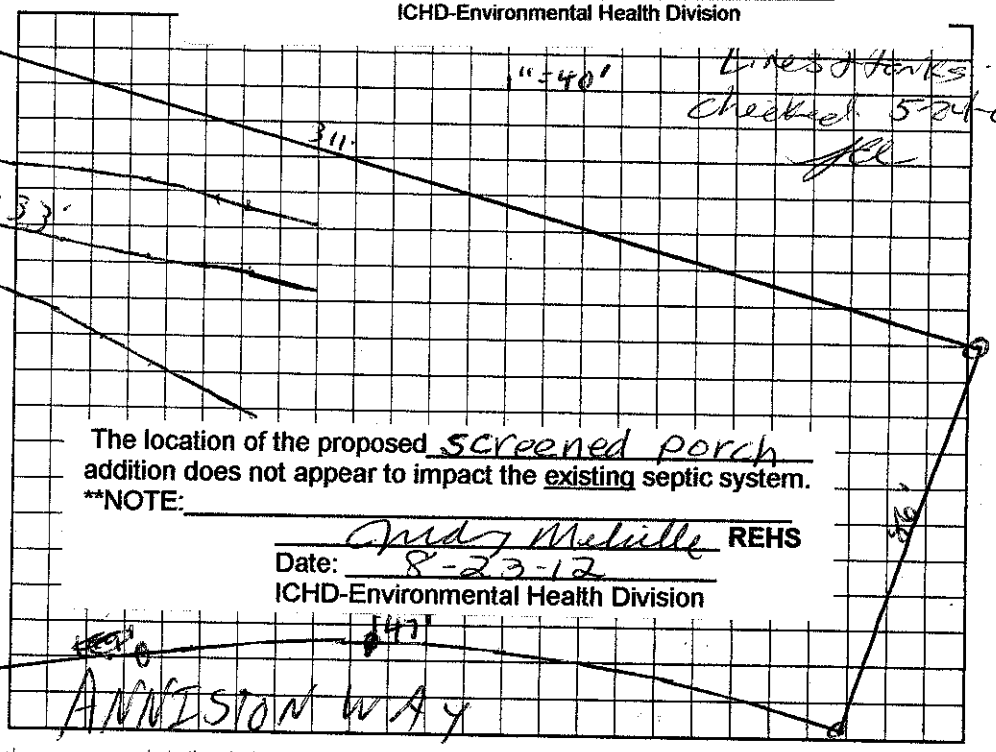

The location of the proposed screened porch addition does not appear to impact the existing septic system.
**NOTE:

Andy Melville REHS
Date: 8-23-12
ICHD-Environmental Health Division

Permit can be suspended or revoked if any false information is supplied toward securing the permit/any unauthorized changes are made to the site/any unauthorized changes are made in the installation of the system. Improvement Permit with plat valid without expiration. Improvement Permit with site plan valid for sixty months. Authorization to Construct is valid for a period equal to that of Improvement Permit – not to exceed sixty months.

Signed: [signature] date 5-17-05

Improvement Permit by: [signature] RS date 4/19/05

Authorization to Construct by: [signature] date 1/26/06

Installed by: Marty Tuckey

Operation Permit by: Wesley Sparks RS date 8/17/07

Existing System Inspection by: date

HEALTH DEPT. COPY: WHITE OWNER COPY (FINAL): YELLOW OWNER COPY (INITIAL): PINK