ROWAN COUNTY HEALTH DEPARTMENT

Environmental Health Section

2725 OLD CONCORD ROAD
SALISBURY, N. C. 28144 — TEL. (704) 633-0411

IMPROVEMENTS PERMIT FOR: Permit # _____ is invalid.

New ☑ Repair ☐ Layout ☐

OWNER James W. Passmore App. # _____ TOWNSHIP Atwell

ADDRESS Rt 10 Box 621 Mocksville NC MAP 231

LOCATION Hwy 152 1/7 from Shaw Rd to Dirt Rd on Rt before County line. (MH off Rd) Sub. _____ PARCEL 22

Lot _____ H.D. # _____

Permit Fee Paid ✓ REC. # 8185

TYPE OF SYSTEM AND STRUCTURE

Conventional ✓ Pump _____ LPP _____ Other _____

House _____ MH ✓ Other _____

Residents 4 Bedrooms 3 Disp. — EDF 360 gal.

Water Public Septic Tank w/Baffle 500 gal.

Pump Chamber — Nit. Lines 900 sq. ft.

SANITARIAN Steve Caudle DATE 8/3/90

CERTIFICATE OF COMPLETION ☑ OPERATIONS PERMIT ☐

Septic Tank 900 gal. Mfg. SCP

Pump Chamber _____ gal. Mfg. _____

Nitrification Lines 900 sq. ft.

Distance from system to water supply 100' ft.

Engineer _____

Installed by Formyduval


SANITARIAN Ed G. Hebeth DATE 3/27/91


SYSTEM INSTALLER

1. Entire system must be installed as shown. Any change requires prior approval by the Rowan County Health Department.
2. System installer is required to provide a level-transit, set in place, for final inspection.

OWNER

1. Sow grass over septic tank and all nitrification lines.
2. Divert all gutter and surface water away from system.

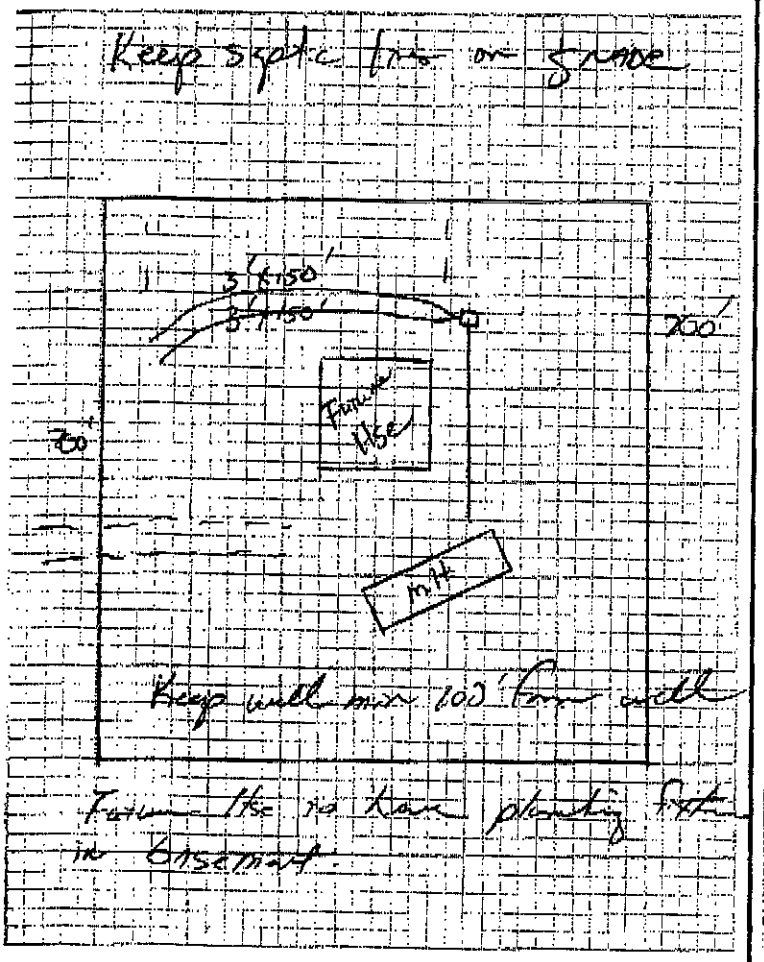

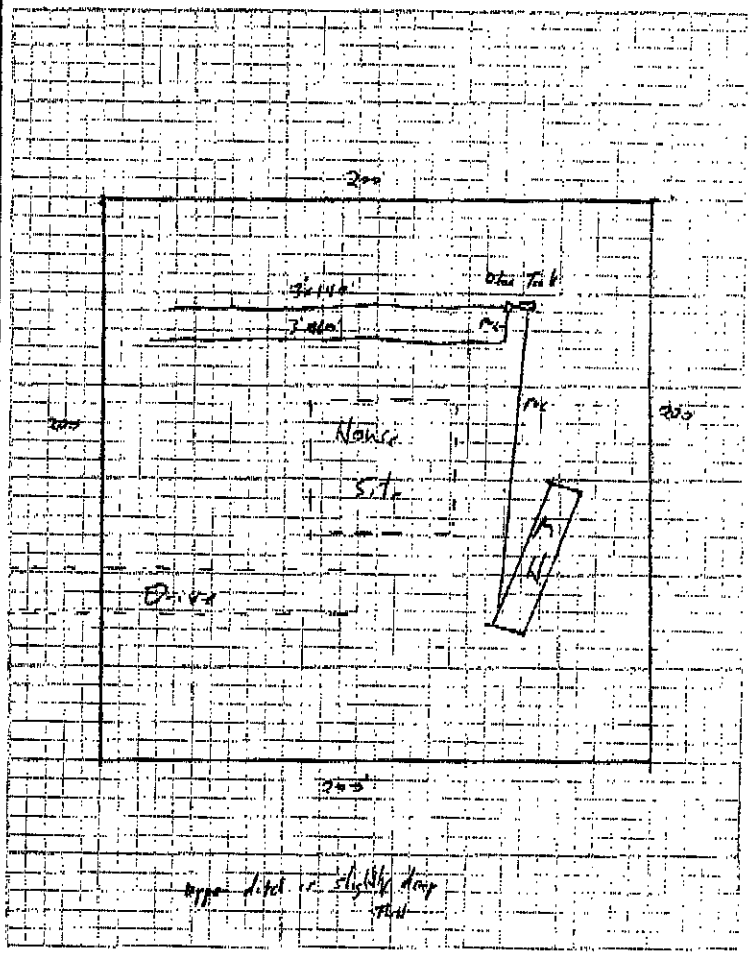

Actions of representatives of the Rowan County Health Department shall in no way be taken as a guarantee that this sewage treatment and disposal system will function in a satisfactory manner for any given period of time, or that such employees assume any liability for damages, consequential or direct, which are caused or which may be caused, by a malfunction of this system. This permit is not transferable and shall become invalid 36 months from the date of issue. If the installation has not been completed during that time period, the information submitted in the application is falsified or changed or the site is altered, this permit shall become invalid. When this permit becomes invalid, the installation shall not be commenced or completed until a new improvements permit has been obtained.

Kathy Adams
OWNER/AUTHORIZED AGENT

8-9-90
DATE